


# Lytecaster low voltage

## Frame-in kits

There's no better way to create high-impact accent lighting for homes, retail stores and other spaces than with low voltage halogen downlighting. By bringing out form, color and texture in the objects being lighted, low voltage lighting draws the viewer in and adds excitement to the composition.



## Standard MR16 non-IC

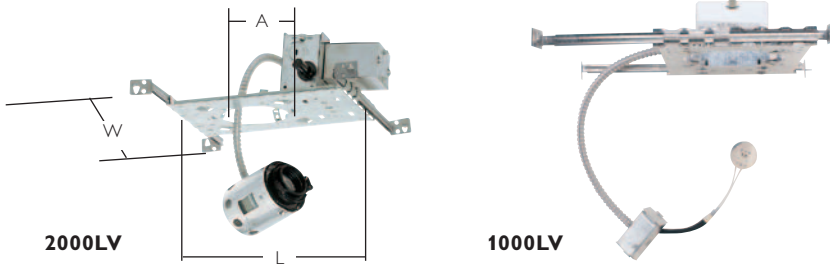

Magnetic transformers provide a cost effective low voltage solution with simplified dimming electronics. The improved technology of Electronic transformers offer cool, quiet operation even when dimmed.

Lytecaster low voltage downlights feature MR16 and PAR36 lamps that provide highly focused beams that are particularly well suited for accent lighting. These low voltage Line Voltage sources are also brighter and last up to twice as long as normal filament lamps.

	<b>2000LVE1</b> <b>2000LVE2</b> Electronic	<b>2000LV</b> Magnetic	<b>2000LVNT</b> MR16 Remote transformer	<b>1000LVE1</b> <b>1000LVE2</b> Electronic	<b>1000LV</b> Magnetic	<b>1000LVNT</b> MR16 Remote transformer
<b>Cut out (A)</b>	3 11/16"	3 11/16"	3 11/16"	5 1/8"	5 1/8"	5 1/8"
<b>Width (W)</b>	7 1/2"	7 1/2"	7 1/2"	7 1/2"	7 1/2"	7 1/2"
<b>Length (L)</b>	11 1/8"	11 1/8"	9 5/8"	11 5/8"	11 5/8"	9 5/8"
<b>Depth* (D)</b>	See reflector trim					

Designed for new construction where insulation will not be installed. Standard new construction MR16 Frame-in Kits for use in ceilings up to 1" thick. Our new LVE series electronic transformers in 120 or 277 volt ensure cool, quiet operation in residential and commercial applications, even when dimmed. Magnetic 120 volt transformer provides a cost effective low voltage solution with simplified dimming electronics. NT allows for remotely mounted transformer. Integral wood joist nailing tabs, UL listed for through wiring, Integral cable clamps for nonmetallic (Romex®) or armored (BX®) cable.

## Lytening MR16 IC



### 2004ICV

Designed for new construction where insulation will be installed around the fixture. Magnetic transformer is mounted inside housing for easy access. AirSeal®, complies with MEC and WSEC air leakage requirements. Pivoting bar-ends, pre-installed screws (or nails), and tool-free cable clamps for fast, convenient installation of non-metallic Romex®, UL listed for through wiring, mounting bars lock to T-bar ceiling runners without accessories, installs in ceilings up to 1" thick, 3/8" integral plaster ceiling ring on 2004ICV.


	<b>2004ICV</b>	<b>1004ICV</b>
<b>Cut out (A)</b>	3 15/16"	5 1/4"
<b>Width (W)</b>	10 3/8"	10 3/8"
<b>Length (L)</b>	12 1/4"	12 1/4"
<b>Depth* (D)</b>	See reflector trim	

**2004ICVN** = Preset nails

**1004ICVN** = Preset nails

## MR16 Remote transformer


LVNT Frame-in kits may be installed in new ceilings up to 1" thick. Philips Lightolier remote transformers 8608 (75W) and 8609 (225W) are fused and suitable for recessed installation.



**8608**  
75W Max.

**8609**  
225W Max.

## Remodeler MR16-non-IC

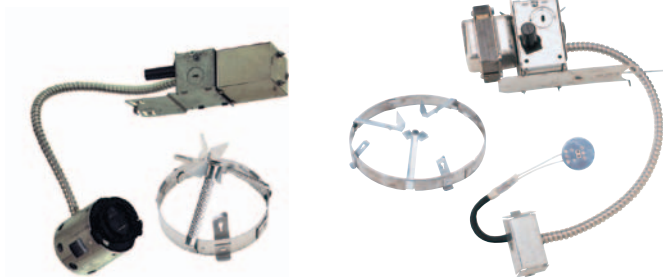

### 2000LVR

Non-IC remodeler for use in existing ceiling up to 2" thick. Pre-installed mounting straps secure flanged ring without tools and without damaging plaster or gypsum ceilings. Available with Magnetic or Electronic transformers.

	<b>2000LVR</b> Magnetic	<b>2000LVRE1</b> Electronic	<b>1000LVR</b> Magnetic	<b>1000LVRE1</b> Electronic
<b>Cut out (A)</b>	3 15/16"	3 15/16"	5 3/8"	5 3/8"
<b>Width (W)</b>	2 3/4"	2 3/4"	5 3/4"	5 3/4"
<b>Length (L)</b>	8 1/8"	8 1/8"	13 1/4"	13 1/4"
<b>Depth* (D)</b>	See reflector trim			