


INCANDESCENT / LED 12V HYBRID PATH & SPREAD

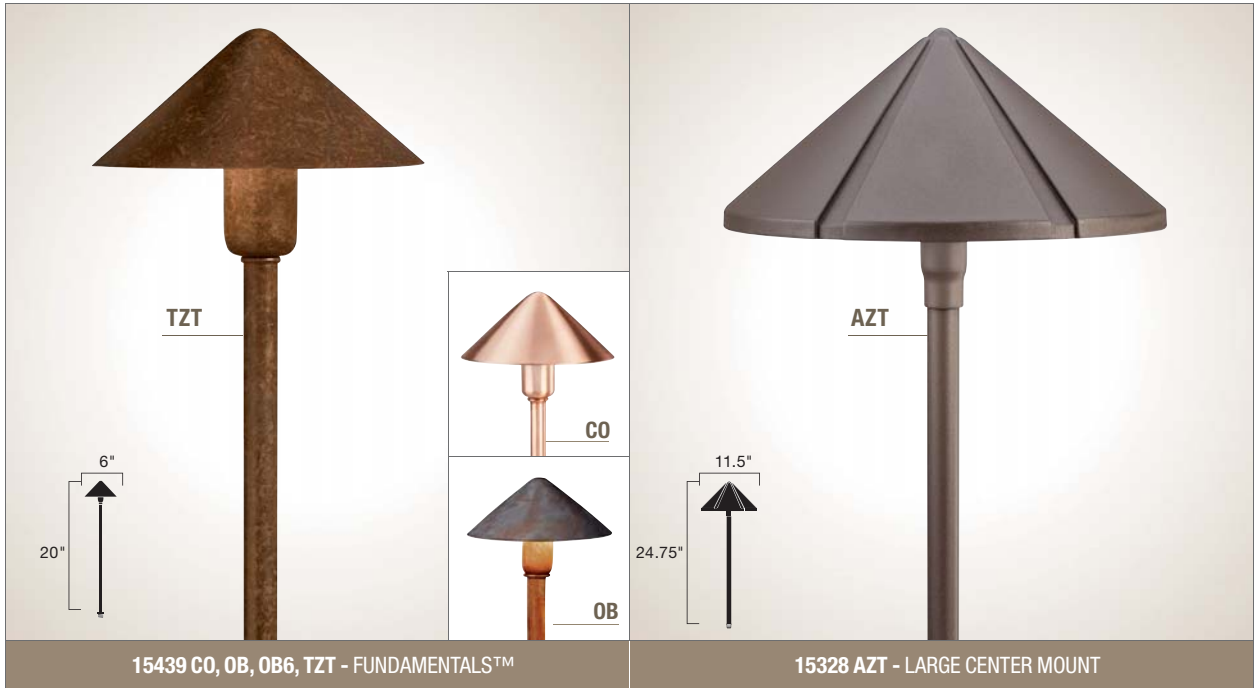

<b>Description</b>	Basic, uncomplicated design for versatility. Use along walkways or points of interest. Now with a heavier gauge shade.	Wide head for broad light spread to highlight beds and paths. Textured Architectural Bronze finish blends with landscape.																																																												
<b>Ordering Guide &amp; Finish</b>	15439 CO - Polished Copper, Copper 15439 OB - Olde Brick®, Brass 15439 OB6 - Same as 15439 OB. Bulk packed in 6 (unbreakable master). 15439 TZT - Textured Tannery Bronze™, Brass	15328 AZT - Textured Architectural Bronze																																																												
<b>Housing</b>	Brass or Unfinished Copper. Copper will naturally patina over time.	Aluminum																																																												
<b>Lamp Base</b>	12V S8 wedge base socket	12V S8 wedge base socket																																																												
<b>Supplied Lamp</b>	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)																																																												
<b>Incandescent Lamp Options</b>	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)																																																												
<b>LED Lamp Options</b>	2W (18036-13038) see page 159 Compares up to 18.5W Krypton	2W (18036-13038) see page 159 Compares up to 18.5W Krypton																																																												
<b>Wiring</b>	35" of usable #18-2, SPT-1-W leads. Cable connector supplied	35" of usable #18-2, SPT-1-W leads. Cable connector supplied																																																												
<b>Mounting Acces. Included</b>	8" In-ground stake	8" In-ground stake and 18" stem																																																												
<b>Optional Acces.</b>	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket																																																												
<b>Integrated LED Options</b>	15839 - on Page 11	NA																																																												
<b>Photometric with Supplied Lamp</b>	<table border="1"> <thead> <tr> <th>Distance from Light</th> <th>0'</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> <th>6'</th> <th>7'</th> <th>8'</th> </tr> </thead> <tbody> <tr> <td>Footcandles</td> <td></td> <td>13.4</td> <td>4.55</td> <td>1.65</td> <td>.58</td> <td>.13</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Footcandles		13.4	4.55	1.65	.58	.13	-	-	-	<table border="1"> <thead> <tr> <th>Stem Height</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> <th>6'</th> <th>7'</th> <th>8'</th> <th>9'</th> </tr> </thead> <tbody> <tr> <td>12"</td> <td>20.8</td> <td>4.1</td> <td>.27</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>18** (as supplied)</td> <td>12.1</td> <td>5.6</td> <td>1.8</td> <td>.67</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>24"</td> <td>8.3</td> <td>5.8</td> <td>2.2</td> <td>.97</td> <td>.48</td> <td>.02</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Stem Height	1'	2'	3'	4'	5'	6'	7'	8'	9'	12"	20.8	4.1	.27	-	-	-	-	-	-	18** (as supplied)	12.1	5.6	1.8	.67	-	-	-	-	-	24"	8.3	5.8	2.2	.97	.48	.02	-	-	-
Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'																																																					
Footcandles		13.4	4.55	1.65	.58	.13	-	-	-																																																					
Stem Height	1'	2'	3'	4'	5'	6'	7'	8'	9'																																																					
12"	20.8	4.1	.27	-	-	-	-	-	-																																																					
18** (as supplied)	12.1	5.6	1.8	.67	-	-	-	-	-																																																					
24"	8.3	5.8	2.2	.97	.48	.02	-	-	-																																																					

Denotes fixture is compatible with incandescent or LED lamps.