

BRAMEC[®]

A-V Pads

Cork / Rubber

7/8" thickness

Ribbed design

Compounded for excellent
resistance to aging,
compression set & oil



All Rubber

3/8" thickness

Ribbed design

Compounded for excellent
resistance to aging,
compression set & oil



Super-Duty



3/4" thickness

Reduces vibration & noise

Compounded for excellent
resistance to aging,
compression set & oil



Super-Duty Rubber Pad

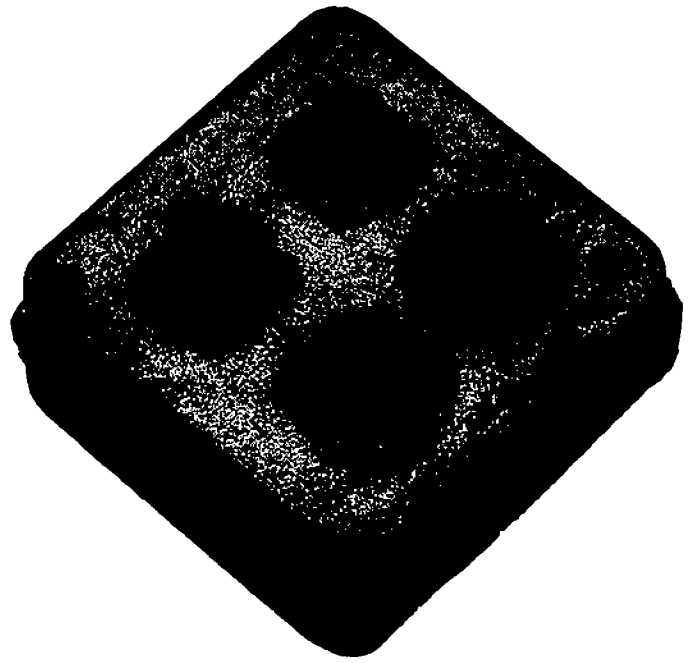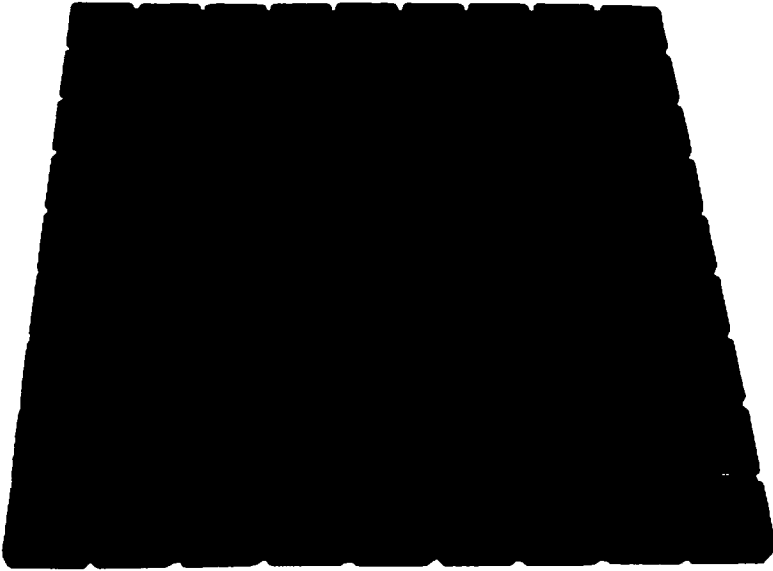


All rubber construction

Compounded for excellent resistance to aging,
compression set & oil

Reduces vibration & noise from air-conditioning
& refrigeration equipment

BRAMEC ITEM NO.	DESCRIPTION	STD. QTY.	UM
19709	18" x 18" Super-Duty Pad	5	EA

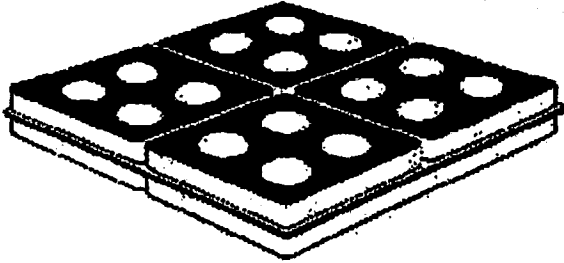

APPLICATION

- Wherever bolting is to be avoided and minor, non-critical vibration conditions exist. (pumps, motors, airconditioning units, generators etc.)

NOTES

1. Material: Special Rubber
2. Maximum loading: 60 lbs/sq.in.
3. Working range: 15 to 55 lbs/sq.in.

FEATURES

- "Waffle pad" design with inbuilt suction cups.
- "Easy-Cut" (by hand) design allows flexibility of pad size to suit job site requirements.
- No bolting required.
- Simple field installation.

