

## 100–300 CFM Specifications



| Model                        | CFM | Sones | Amps | Sound Insulation | Notes     |
|------------------------------|-----|-------|------|------------------|-----------|
| <b>White Polymeric Grill</b> |     |       |      |                  |           |
| <b>L100</b>                  | 109 | 0.9   | 1.1  | Yes              |           |
| <b>L150</b>                  | 157 | 1.5   | 1.3  | Yes              |           |
| <b>L200</b>                  | 210 | 1.7   | 1.8  | Yes              |           |
| <b>L250</b>                  | 259 | 2.2   | 2.1  | Yes              |           |
| <b>L300</b>                  | 308 | 2.9   | 2.6  | Yes              |           |
| <b>White Metal Grill</b>     |     |       |      |                  |           |
| <b>L100MG</b>                | 115 | 0.9   | 1.1  | Yes              |           |
| <b>L150MG</b>                | 161 | 1.4   | 1.3  | Yes              |           |
| <b>L200MG</b>                | 215 | 1.9   | 1.8  | No               |           |
| <b>L250MG</b>                | 265 | 2.5   | 2.1  | No               |           |
| <b>L300MG</b>                | 316 | 3.0   | 2.6  | No               |           |
| <b>L300KMG</b>               | 277 | 3.1   | 2.6  | No               |           |
| <b>In-line Ventilator</b>    |     |       |      |                  |           |
| <b>L100L</b>                 | 106 | 0.7   | 1.1  | No               | No Grille |
| <b>L150L</b>                 | 147 | 1.1   | 1.3  | No               | No Grille |
| <b>L200L</b>                 | 195 | 1.9   | 1.8  | No               | No Grille |
| <b>L250L</b>                 | 245 | 2.3   | 2.1  | No               | No Grille |
| <b>L300L</b>                 | 293 | 3.1   | 2.6  | No               | No Grille |

See page 71 for CFM details.

FOR EVERY  
VENTILATION NEED



### L100L | L150L | L200L | L250L | L300L IN-LINE VENTILATORS

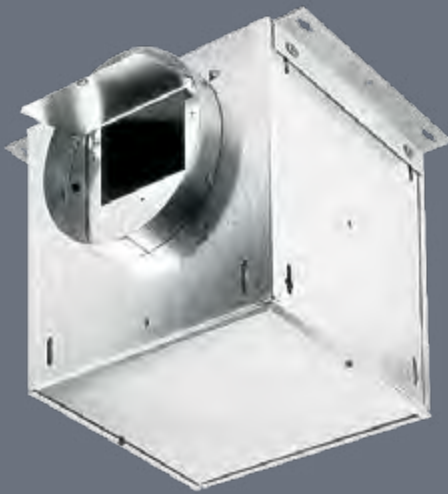

### MODEL 80L

- Adjust ventilation easily in any room
- Variable Speed Control mounts inside the fan housing and allows blower speed adjustment
- For Broan High Capacity Fans L100–L900
- Speed control with metal housing
- Fan insulation is perforated for easy installation
- 120V, 3 amps, 60 Hz

### 80L VARIABLE SPEED CONTROL



## 900/1500/2000 CFM FEATURES

- 8" x 12" duct
- Painted white enamel metal grille
- Single, impact-resistant centrifugal blower wheel
- Ducted horizontally or vertically, or in-line with separate adapter
- Model 80L Variable Speed Control adjusts blower speed and sound level (available separately)
- Not for use over tub or shower

### Models L900, L1500 (shown)

- L900 can use the 80L variable speed blower control (sold separately)


### Models L900L, L1500L

- Removable access panel; no insulation
- Can use the 80L variable speed blower control (sold separately)


### Model L2000L

- 38"L x 14<sup>5</sup>/<sub>8</sub>"W x 14<sup>5</sup>/<sub>8</sub>"H
- Fits 7<sup>3</sup>/<sub>4</sub>" x 33<sup>3</sup>/<sub>4</sub>" duct
- Optional metal grille (Model G102) and damper kit (Model D100)

L900 | L1500\*  
METAL GRILLE

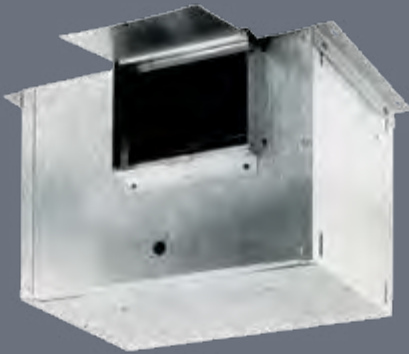




L900L | L1500L  
IN-LINE VENTILATORS

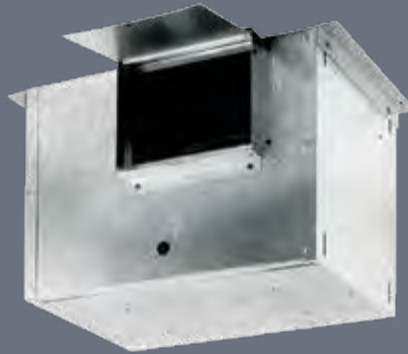

L2000L  
IN-LINE VENTILATORS



Shown with optional metal grille (Model G102) and damper kit (Model D100).

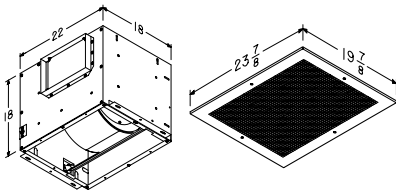

80L  
VARIABLE SPEED CONTROL



## 900–2000 CFM Specifications

| Model  | CFM  | Sones | Amps | Notes                             |
|--------|------|-------|------|-----------------------------------|
| L900   | 901  | 4.1   | 3.0  | Painted white enamel metal grille |
| L1500  | 1513 | 8.4   | 5.0  | Painted white enamel metal grille |
| L900L  | 894  | 3.8   | 3.0  | In-line                           |
| L1500L | 1214 | 6.7   | 5.0  | In-line                           |
| L2000L | 1791 | 9.4   | 5.8  | In-line                           |

See page 71 for CFM details.

Metal grilles are not acceptable for use over tub or shower.

## MODEL 80L

- Adjust ventilation easily in any room
- Variable Speed Control mounts inside the fan housing and allows blower speed adjustment
- For Broan High Capacity Fans L100–L900L
- Speed control with metal housing
- Fan insulation is perforated for easy installation
- 120V, 3 amps, 60 Hz