



NDB300WH – Door Speaker

NDB300AB



NDB300BB



NDB300N



NDB300 Series Door Speakers

This line of Door Speakers have a voice communications interface that mounts adjacent to an entry door. Two-way voice communication with the resident occurs through the unit's built-in speaker. The door station mounts recessed in the wall using an NRKR300D Door Speaker Rough-in. This series of door speakers are for use with the NM100 and NM200 'Master' stations only.

Finish Options:

NDB300AB – Antique Brass finish

NDB300BB – Bright Brass finish

NDB300N – Nickel finish

NDB300WH – White finish

(All models feature a lighted chime pushbutton)

NM200 System Components

Order Rough-in PLUS finish kit to make a complete unit.

Finish Kit Model No.	Finish	Width	Height	In-Wall Depth	Projects	Rough-In Model No.
'Master' Stations						
NM200AL NM200WH	Almond White	15-1/4"	5-5/16"	3-3/8"	1-1/8"	NWH300
NM200K	Package: (1) NM200WH, (4) NRS200WH, (1) NPS200WH, (1) NDB300WH, (1) NA3003C					NRKRWH300
NRKRWH300	Package: (1) NWH300, (4) NRKR200R, (1) NRKF200P, (1) NRKR300D					–
Indoor Remote Stations						
NRS200AL NRS200WH	Almond White	5-1/2"	5-1/2"	1-5/8"	1-1/8"	NRKR200R
Outdoor Remote Stations						
NPS200WH	White	5-1/2"	5-1/2"	1-5/8"	1-1/8"	NRKF200P

Intercom Door Speaker Options for: NM100 and NM200

Order Rough-in PLUS finish kit to make a complete unit.


Finish Kit Model No.	Finish	Width	Height	In-Wall Depth	Projects	Rough-In Model No.
Door Speakers						
NDB300AB	Antique Brass	4-3/16"	6-5/16"	1-3/8"	5/8"	NRKR300D
NDB300BB	Bright Brass	4-3/16"	6-5/16"	1-3/8"	5/8"	NRKR300D
NDB300N	Nickel	4-3/16"	6-5/16"	1-3/8"	5/8"	NRKR300D
NDB300WH	White	4-3/16"	6-5/16"	1-3/8"	5/8"	NRKR300D

Intercom Options:

See p. 15 for chime modules and audio wall plate, p. 13 for intercom speakers and volume control and p. 14 for update and surface frames.

The NM200 remote stations are designed to work with Category 5 or 5E cable. The door speakers are designed to work with NuTone® NW4S shielded cable. Using these cables enables full system performance and minimizes outside interference, dimmer noise, radio frequency interference and other reception problems. If wire other than NuTone® specified wire is used in the installation of a NuTone® Radio Intercom, the Warranty shall not be applicable to any defects or problems relating to the use of non-NuTone® specified wire.

Wiring Diagrams

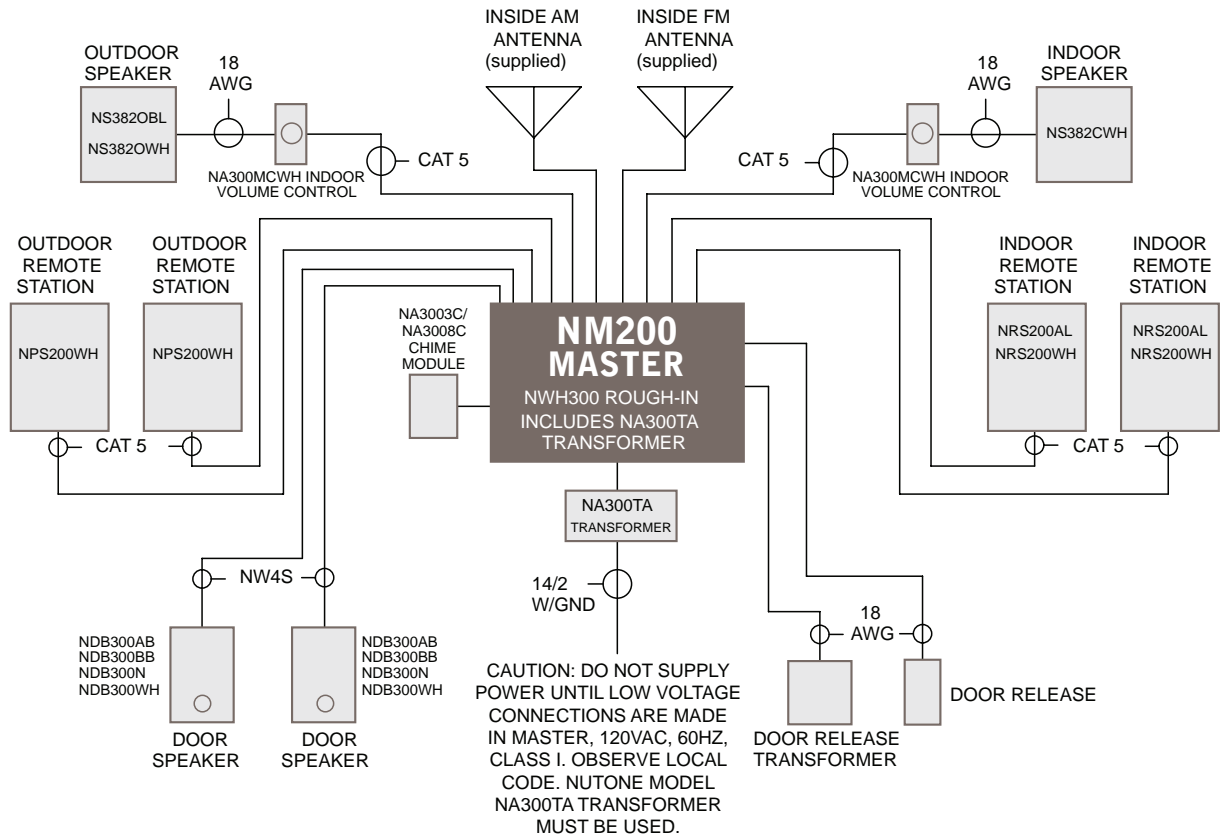

NM200 4 Remote Station System

Quantity	Model	Description
1	NM200WH	'Master' Station
4	NRS200WH	Remote Stations
1	NDB300WH	Door Speaker
1	NRKRWH300	'Master,' Remote Station and Door Speaker Rough-Ins

Components must be ordered separately.