

Commercial Specification Grade Straight Blade Power Devices

3 Pole, 3 Wire Non-Grounding
NEMA 10-20, 10-30
20A 125/250V
30A 125/250V



INDUSTRIAL
COMMERCIAL
RESIDENTIAL

A-24 STRAIGHT BLADE RECEPTACLES

TESTING & CODE COMPLIANCE

- UL file:
- Receptacles:
(file no. E15058);
- Plugs:
(file no. E15012).
- NOM Certified.




MATERIAL CHARACTERISTICS

Temperature Rating:
-20°C (without
impact) to 75°C
max. continuous.

Power Devices

FEATURES

- Heavy gauge steel mounting strap zinc-plated for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 30A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.

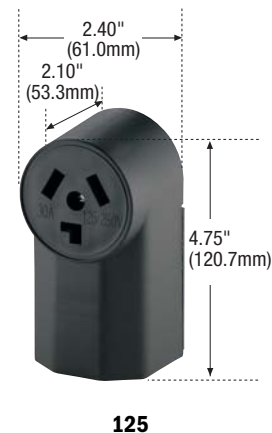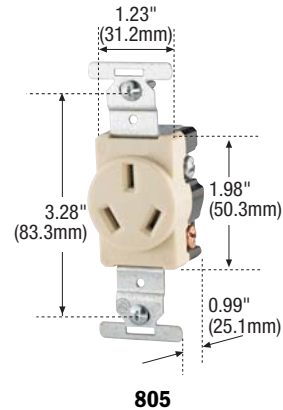

NEMA 10-20 Rating 20A 125/250V

Receptacles

Description	Color	Catalog No.
Flush	Brown	805B*
	Ivory	805V*

*Not CSA approved

Plugs

Description	Color	Catalog No.
Armored Vinyl	Yellow	2836

NEMA 10-30 Rating 30A 125/250V

Receptacles

Description	Color	Catalog No.
Surface	Black	125
Flush	Brown	38B

Plugs

Description	Color	Catalog No.
Angle Universal - Vinyl	Black	80



10-20R



10-20P



10-30R



10-30P