



Commercial Specification Grade Locking Devices

2 Pole, 2 Wire Non-Grounding
 2 Pole, 3 Wire Grounding
 NEMA L1-15, 15A 125V
 NEMA L5-15, 15A 125V
 NEMA L6-15, 15A 250V
 NEMA L7-15, 15A 277V

15A 2 Pole 3 Wire Commercial Specification Grade Locking Plugs and Connectors

FEATURES

- Abuse resistant thermoplastic construction.
- Back wire Dead-Front design.
- Thermoplastic plugs have external cable clamp which provides firm strain relief.
- Nylon plugs have internal Autogrip® style strain relief for fast wiring.
- Back wire terminal clamps for easy secure wiring.
- Individual wiring compartments with tapered channel for easy insertion of wires.
- Clear cover over wiring compartments allow easy inspection of wiring terminations.
- Clearly marked rating, NEMA configuration and standard compliances on face of plug or connector.
- Nylon Plugs and connectors have slot/Phillips combination head screws.



4579



L115P



4720



4570


Commercial Specification Grade Thermoplastic Locking Plugs and Connectors

Rating A	V/AC	NEMA	Description/ Cord Diameter	Color	Catalog No.	
					Plug	Connector
15	125	L1-15	Commercial Grade: 0.25"-0.69" (6.4mm-17.5mm)	Black & White	L115P	—
15	125	L5-15	Straight: 0.25"-0.69" (6.4mm-17.5mm)	Black & White	4720	4729
			Angle: 0.25"-0.69" (6.4mm-17.5mm)	Black & White	4720AN	—
15	250	L6-15	Straight: 0.25"-0.69" (6.4mm-17.5mm)	Black & White	4570	4579
			Angle: 0.25"-0.69" (6.4mm-17.5mm)	Black & White	4570AN	—
15	277	L7-15	Straight: 0.25"-0.69" (6.4mm-17.5mm)	Black & White	4770	4779

Commercial Specification Grade Nylon Locking Plugs and Connectors

Rating A	V/AC	NEMA	Description/ Cord Diameter	Color	Catalog No.	
					Plug	Connector
15	125	L5-15	Straight: 0.250"-0.656" (6.4mm-16.7mm)	Yellow	3473-3	3493-3
15	250	L6-15	Straight: 0.250"-0.656" (6.4mm-17.5mm)	Yellow	3474-3	3494-3
15	277	L7-15	Straight: 0.250"-0.656" (6.4mm-17.5mm)	Yellow	3475-3	3495-3

NOTE: Weather Protective Boots from Cooper Wiring Devices that may be used with these products are described on page E-72 in this section.

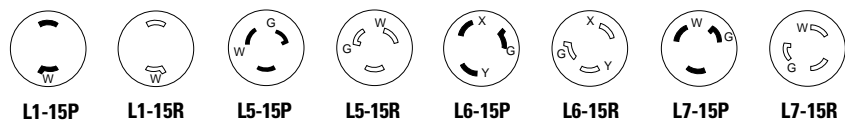

INDUSTRIAL
COMMERCIAL

E-33 LOCKING DEVICES

TESTING & CODE COMPLIANCE

- Listed to UL 498, (file no. E15012) except Nylon Plugs, Connectors, (file no. E3663).
- CSA Certified to C22.2 no. 42 (file no. LR2081 (6221-02)) except Nylon Plugs, Connectors (file no. LR7087).

MATERIAL CHARACTERISTICS

Thermoplastic Plugs & Connectors: Polycarbonate and PVC.
 Nylon Plugs, Connectors: Nylon.
 Environmental: Flammability per UL 94 requirements.
 Thermoplastic Plugs & Connectors V2 rated.
 Temperature Rating: Thermoplastic Plugs, Connectors: -20°C to 60°C.
 Nylon Plugs, Connectors: -40°C to 75°C.