

- Convenient patented built-in wire stripper speeds installation
- Steel mounting strap is zinc-plated for added corrosion resistance
- USB Receptacles allow for quick and convenient charging of most electronic components
- Nightlight models feature dimmable LED lamps



TR
TAMPER
RESISTANT

Specific combination device solutions for today's needs




Light & motor control

Combination switches are horsepower rated to carry motor loads such as bathroom fans and garbage disposals on the same or separate circuits.

See page B-15

Shown:
7728

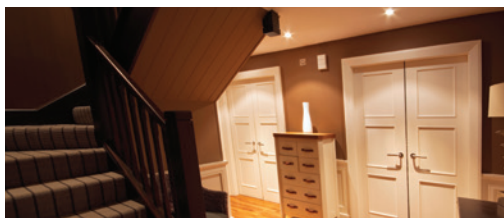

LED nightlight combinations

Ideal for bathrooms, hallways, stairs and landings, flush-mount LED nightlight combination devices provide added safety and comfort along with switch or receptacle functionality.

See page B-18

Shown:
TR7735



USB charging devices

Perfect for quickly and easily charging most electronic components without powered computers or bulky adapters.

See page B-14

Shown:
TR7740



Combination USB charger with tamper resistant receptacle

Product description

2-pole, 3-wire grounding
 15A, 125V/AC, 5V DC 700MA
 15A, 125V/AC, 5V DC 2.1A
 20A, 125V/AC, 5V DC 2.1A

Design features

- Standard AC receptacle with two USB charging ports for conveniently charging most electronic components
- Dual USB charging ports charge most compatible electronic devices that charge via a 5V power adapter
- Three (3) pre-stripped 6" wire leads for line, neutral and ground for quick and easy installation (TR7745 and TR7746 only)
- Tamper resistant receptacles provide compliance with 2014 NEC® Article 406.12 which states that all 15A and 20A, 125V/AC receptacles installed in dwelling units must be tamper resistant
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure and provides redundant measure of ground continuity where jumper is used
- Thermoplastic top and back-body are virtually unbreakable to deliver years of durable performance
- Steel mounting strap is zinc-plated for added corrosion resistance
- Convenient patented built-in wire strippers speeds installation
- Backwire clamps on side terminals provide for easy installation of #12 and #14 AWG wire (TR7740)
- Triple wipe blade contacts and double wipe ground contacts to insure long-term plug retention
- Replaces a standard duplex receptacle



TR7740



TR7745



Combination USB charger with TR receptacle



A	Rating		V/DC	Description	Color suffix	Catalog no.
	V/AC	A				
15	125	0.70	5	Combination USB charger with TR receptacle	A, BK, GY, LA, V, W	□ TR7740__
15	125	2.1	5	USB charger with TR duplex receptacle, wire leads	A, B, BK, GY, LA, V, W	□ TR7745__
20	125	2.1	5	USB charger with TR duplex receptacle, wire leads	A, B, BK, GY, LA, V, W	□ TR7746__

cULus Listed UL 498 and UL1310; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White).



Dimensional information: B-68 **Specification information:** Please visit www.cooperwiringdevices.com
Compliances, specifications and availability are subject to change without notice.

Tamper resistant