


# Surge protection receptacles

## Protect your valuables with arrow hart surge protection receptacles

With over 50% of transient voltage originating from inside a building, Arrow Hart's surge protection point of use receptacles provide branch circuit surge protection for sensitive electronic equipment that panel mounted surge protection systems cannot provide

### Surge protection plus

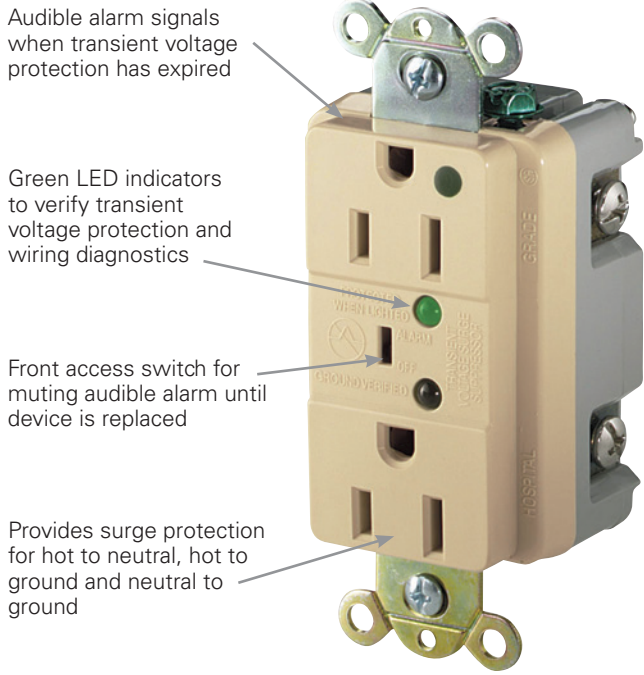


Audible alarm signals when transient voltage protection has expired

Green LED indicators to verify transient voltage protection and wiring diagnostics

Front access switch for muting audible alarm until device is replaced

Provides surge protection for hot to neutral, hot to ground and neutral to ground

### Surge bloc

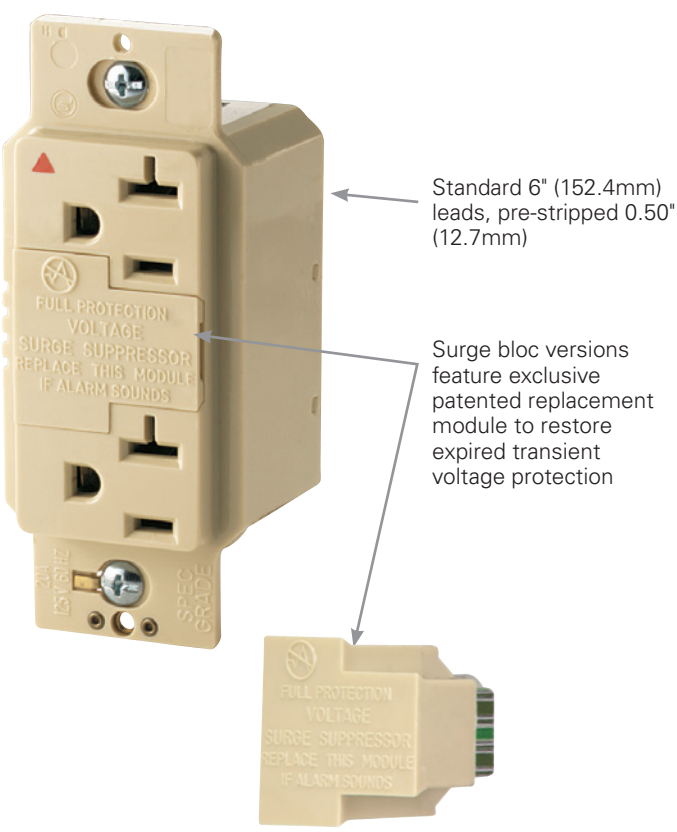

Standard 6" (152.4mm) leads, pre-stripped 0.50" (12.7mm)

Surge bloc versions feature exclusive patented replacement module to restore expired transient voltage protection

### Surge protection plus

#### Additional features & benefits

- Available in hospital and commercial grades in 15A & 20A 125V configurations with LED, audible alarm and isolated ground versions
- 8-Hole back and side wired
- High impact thermoplastic construction

### Surge bloc

#### Additional features & benefits

- Provides surge protection for hot to neutral, hot to ground and neutral to ground
- Available in isolated ground versions for noise protection against EMI and RFI
- Audible alarm signals when surge protection has expired


Compliances, specifications and availability are subject to change without notice.

# Surge protection receptacles

## Surge protection receptacles with LED indicators & audible alarm

### Product description

2-pole, 3-wire grounding  
15A, 125V/AC; 20A, 125V/AC; NEMA 5-15R & 5-20R



5-15R

5-20R

### Receptacles w/audible alarm & LED indicators, back & side wire



Rating		NEMA	Description	Color suffix	Catalog no.	
A	V/AC					
15	125	5-15R	Hospital grade, duplex receptacle	BL, GY, RD, V, W	□ 8200__S	• •
			IG hospital grade, duplex receptacle	BL, GY, RN, V, W	□ IG8200HG__S	• •
			Commercial grade, duplex receptacle	BL, GY, V, W	□ 5262__S	• •
			IG commercial grade, duplex receptacle	BL, GY, RN, V, W	□ IG5262__S	• •
20	125	5-20R	Hospital grade, duplex receptacle	BL, GY, RD, V, W	□ 8300__S	• •
			IG hospital grade, duplex receptacle	BL, GY, RN, V, W	□ IG8300HG__S	• •
			Commercial grade, duplex receptacle	BL, GY, V, W	□ 5362__S	• •
			IG commercial grade, duplex receptacle	BL, GY, RN, V, W	□ IG5362__S	• •

560 Joules, max. surge current - 18kA per mode

### Receptacles w/LED indicators, back & side wire



Rating		NEMA	Description	Color suffix	Catalog no.	
A	V/AC					
15	125	5-15R	Commercial grade, duplex receptacle	BL, GY, V, W	□ 5250__S	• •
			IG commercial grade, duplex receptacle	BL, GY, RN, V, W	□ IG5250__S	• •
20	125	5-20R	Commercial grade, duplex receptacle	BL, GY, V, W	□ 5350__S	• •
			IG commercial grade, duplex receptacle	BL, GY, RN, V, W	□ IG5350__S	• •

840 Joules, max. surge current - 18kA per mode

### Receptacles w/audible alarm



Rating		NEMA	Description	Color suffix	Catalog no.	
A	V/AC					
15	125	5-15R	Commercial grade, duplex receptacle	V, W	□ 1208__	• •
			IG commercial grade, duplex receptacle	V, W	□ IG1208__	• •
20	125	5-20R	Commercial grade, duplex receptacle	BL, V, W	□ 1210__	• •
			IG commercial grade, duplex receptacle	V, W	□ IG1210__	• •

340 Joules, max. surge current - 12kA per mode

### Replacement surge bloc module



Description	Color suffix	Catalog no.
Replacement module	A, BL, GY, V, W	□ 1209__

### Accessories for surge protection receptacles



Description	Color	Catalog no.
1-Gang mid-size decorator polycarbonate wallplate	BL	□ PJ26BL
1-Gang mid-size decorator polycarbonate wallplate	W	□ PJ26W
1-Gang mid-size decorator polycarbonate wallplate, pre-marked "ISOLATED GROUND"	RN	□ PJ26IG

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BL (Blue), GY (Gray), RD (Red), RN (Orange), V (Ivory), W (White)

<b>BL</b>	<b>GY</b>	<b>RD</b>	<b>RN</b>	<b>V</b>	<b>W</b>
(Blue)	(Gray)	(Red)	(Orange)	(Ivory)	(White)


**Specification information:** Surge protection receptacles with audible alarm & LED I-20; surge protection receptacles with LED indicators I-21

**Compliances, specifications and availability are subject to change without notice.**


➤ ArrowLink option available. Add "M" suffix to standard catalog number (example 8300WS, 8300WSM). For ordering information on ArrowLink & ArrowLink SPD connectors, see Page I-3




Build-to-spec customizable devices - Page I-5




IG8200HG\_S



5362\_S



IG5350\_S



IG1208



1209