



CKHA Series Kick Space Heater

Volts	Watts	BTU	Weight	Catalog Number	<input checked="" type="checkbox"/>
120	450	1535	6.4/14	CKHA20D31	<input type="checkbox"/>
120	900	3071	"	"	
120	1350	4606	"	"	
120	1800	6142	"	"	
240/208	900/675	3071/2303	"	"	
240/208	1800/1350	6142/4606	"	"	


Factory wired at 240/208V for 900/675W

Colour	<input checked="" type="checkbox"/>
Black	<input type="checkbox"/>
White	<input type="checkbox"/>

Control Options (Field Installed)

Cat. No.	Description	<input checked="" type="checkbox"/>
CKHATD13	Single Pole thermostat	<input type="checkbox"/>
CKHATD23	Double Pole thermostat	<input type="checkbox"/>

Thermostats are adjustable by slotted screw adjustable by slotted screw adjustment Through front grille only.

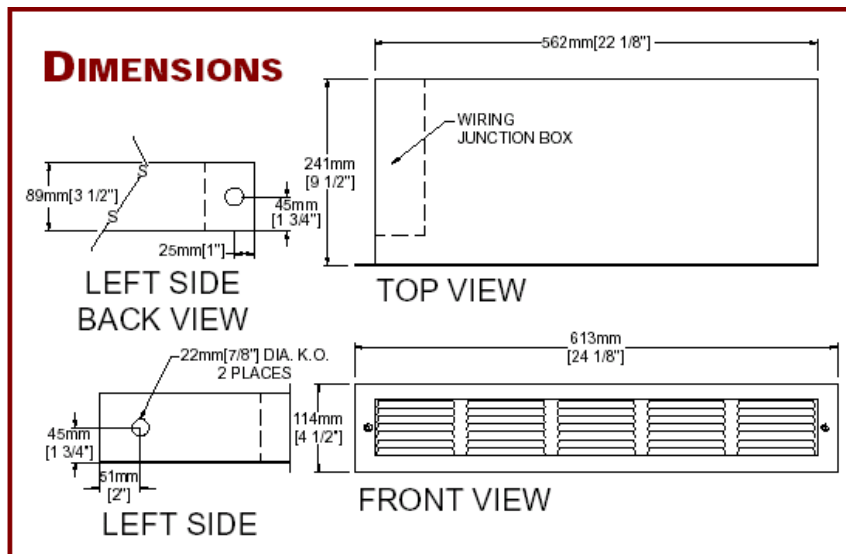

Specifications

VOLTAGE	120, 240/208V
WATTAGE	Five outputs ranging from 450W to 1800W
COLOUR	Black or White
AIRFLOW	80 CFM
FINISH	Specially formulated polyester powder coating process is applied to the front panel which resists fading and abrasion.
CONSTRUCTION	The enclosure is constructed of 20 gauge steel. Horizontal mount only.
HEATING ELEMENT	The Kick Space heater has four totally enclosed nickel chromium resistance elements with steel sheaths. The elements are complete with spiral steel fins that are brazed to the steel sheath to provide excellent heat transfer.
CONTROLS & WIRING	The Kick Space heater is factory wired for 240/208V @ 900/675W and is field convertible for 240/208V @ 1800/1350W, 120@ 450,900, 1300 or 1800W configuration. The unit is controllable from a Line voltage wall thermostat or field installed built-in tamperproof single or double pole thermostat Kit.
WARRANTY	One year warranty on complete unit.