

# DAVEY DynaDrive™



Model Numbers:  
DD15-35NPT, DD60-10NPT,  
DD90-11NPT



WQA certified to  
NSF/ANSI 61 standard



## COMPACT ALL-IN-ONE CONSTANT PRESSURE SYSTEM

### APPLICATION

Ideal for household and domestic water supply, farming and agricultural water systems, irrigation and turf watering systems and automatic general water transfer.

### FEATURES & BENEFITS

Flows up to 36 gpm and heads up to 91 psi

**Horizontal multistage centrifugal pump with all hydraulic parts in stainless steel:**

- Suitable for high water temperatures
- Corrosion and wear resistant
- Compact design
- Easy to install

**Stainless steel impellers with high efficiency impeller profile and thick self-centering impeller neck rings for:**

- High efficiency
- Reduced power consumption:
- Low noise output

**Air purging valve and stage porting (Models DD60-10NPT and DD90-11NPT only):**

- Easier priming
- Less susceptible to air leaks
- Improved dependability

**Impellers mounted directly on extended motor shaft:**

- Maximize performance per stage
- High efficiency
- Long motor and pump life
- Increased wear resistance

**Pump casing assembly attached to motor bracket at 8 points with o-ring seal (model DD15-35NPT - 6 points):**

- Complete stainless casing
- Better sealing
- Longer service life

**Davey built, totally enclosed fan cooled (TEFC) electric motor:**

- Sealed and greased for life motor bearings
- Oversized drive end bearing
- Longer life
- Easy service
- Economical and quiet running
- Solid copper windings

### CONTROLLER

- Warning indication for system faults
- Adjustable pressure settings
- Constant pressure at high flow rates
- Loss of prime protection
- Capable of daisy chain applications of two pumps in parallel
- Easy service
- Economical and quiet running

# Constant Pressure System

## OPERATING LIMITS

Models	DD15-35NPT	DD60-10 (CE/NPT)	DD90-11 (CE/NPT)
Max. flow rate @ 300kPa (43psi)	45L/min (12 US gallons)	60L/min (16 US gallons)	92L/min (24 US gallons)
Max. flow rate @ 400kPa (58psi)	18L/min (5 US gallons)	48L/min (13 US gallons)	72L/min (19 US gallons)
Max. flow rate @ 500kPa (73psi)	N/A	32L/min (8 US gallons)	35L/min (9 US gallons)
Max. casing pressure	800kPa (116psi)	1,000kPa (145psi)	
'Out of Box' constant pressure	414kPa (60psi)		
Max. set pressure	600kPa (87psi)		
Min. cut-in pressure (gauge)	10kPa (1½psi)		
Default cut-in pressure	50kPa (7psi) less than set pressure		
Max. cut-in pressure	20kPa (3psi) less than set pressure		
Operating water temp range	0 – 80°C (32 - 176°F)		
Operating ambient/air temp range	0 – 50°C (32 - 122°F)		
Maximum humidity	95%		
Nature of fluids	Clean, clear, non-corrosive, non-flammable liquids with no fibers and little sand/silica or abrasives (maximum concentration 40g/m³).		
Applicable approvals	UL 778; UL61800-5-1; CSA-C22.2 No. 108-14		

## ELECTRICAL DATA

Models	DD15-35NPT	DD60-10NPT	DD90-11NPT
Voltage	110 – 120V ~	220 – 240V ~	
Max motor speed	2,900rpm		
Frequency (incoming power)	50 – 60Hz		
Input power P <sub>1</sub>	0.8kW	1.1kW	1.3kW
Output power P <sub>2</sub>	0.55kW	0.8kW	0.9kW
Running current	9.4A	7.4A	8.6A
Insulation class	F		
IP rating	55		

## MATERIALS OF CONSTRUCTION

PART	MATERIAL	
	DD15-35NPT	DD60-10NPT DD90-11NPT
Model		
Casing	304 stainless steel	
Impellers	304 stainless steel	
Stages (casing)	304 stainless steel	
Pump shaft	316 stainless steel	
Stage centring device	304 stainless steel	
Mechanical seal (rotating)	Carbon	
Mechanical seal (stationary)	Ceramic	Ceramic
Mechanical seal (spring)	316 stainless steel	
Mechanical seal (bellows)	EPDM	
O-rings	EPDM	
Plugs	304 stainless steel	316 stainless steel
Motor shell and lantern bracket	Aluminium	Aluminium with baked polyester powder coat finish
Motor feet	Aluminium	Xenoy
Fan cowl/rear foot	N/A	Polypropylene
Adaptor VSD	Aluminium 601	Polypropylene
5-way tee piece	304 stainless steel	
Pump coupling to 5-way tee piece	N/A	304 stainless steel
Bearings	6202ZZ Greased and Sealed for life	C3 greased and sealed for life


## HYDRAULIC PERFORMANCE

Models	DD15-35NPT	DD60-10NPT	DD90-11NPT
Inlet	1" NPT F	1¼" NPT F	
Discharge outlet (BSP M)	1" NPT F		
Default nominal operating pressure	60psi		
Number of stages (impellers)	5	6	5
Maximum pump pressure (head)	65psi	91psi	80psi
Pressure tank outlet	1" NPT M		
Tank pre-charge (Default)	42psi		

# Constant Pressure System


**DIMENSIONS (inches)**

Model	A	B	C	D	E	F	G	H	I	J	K	L
DD15-35NPT	5 1/4	22 1/2	11 3/4	5 1/2	3 1/2	9	7 3/4	9	16 1/2	6 3/4	4	5 1/4

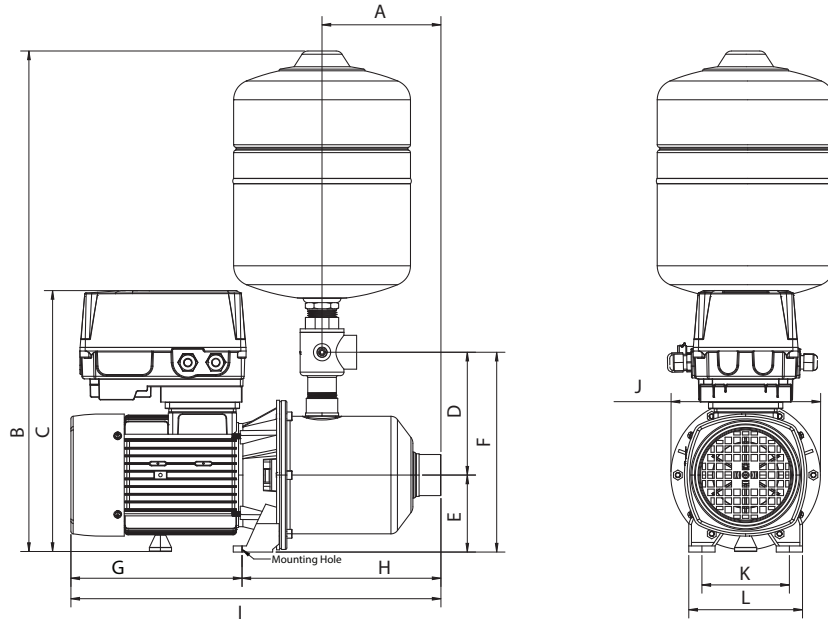









**DIMENSIONS (inches)**

Model	A	B	C	D	E	F	G	H	I	J	K	L
DD60-10NPT	6 7/8	23 1/2	12	5 7/8	4	9 7/8	5 1/8	10 1/8	18 1/8	6 3/4	4	5 1/4
DD90-11NPT												

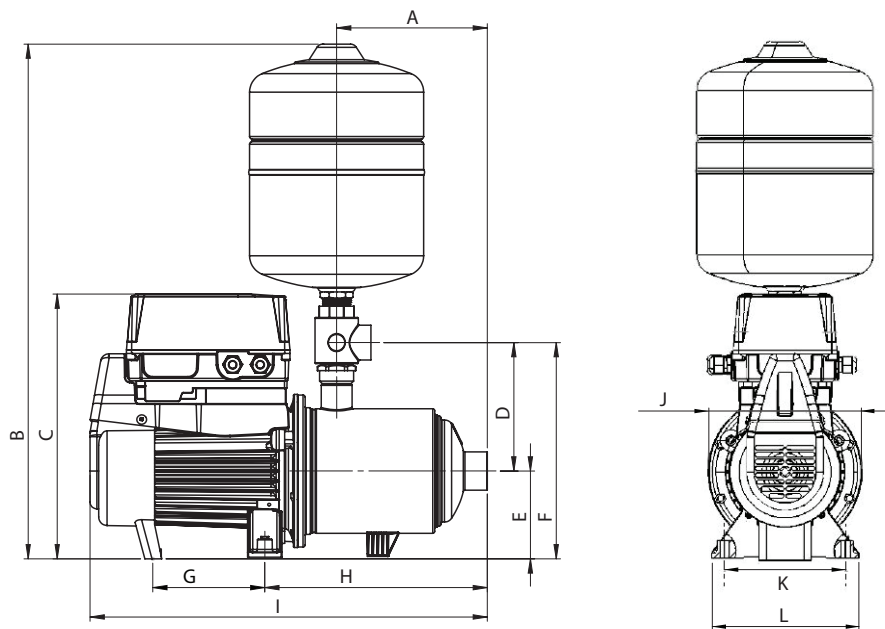

# Constant Pressure System

## HYDRAULIC PERFORMANCE

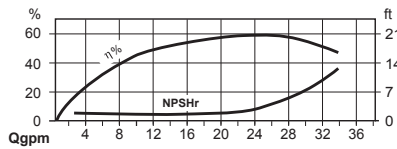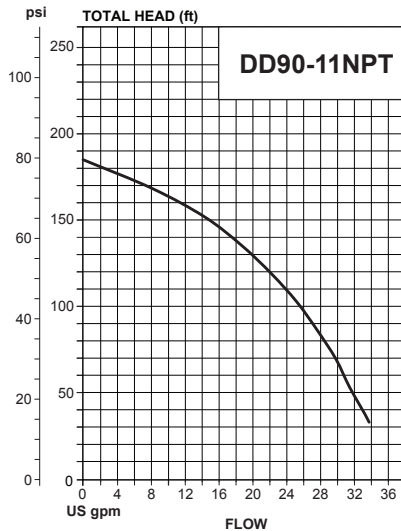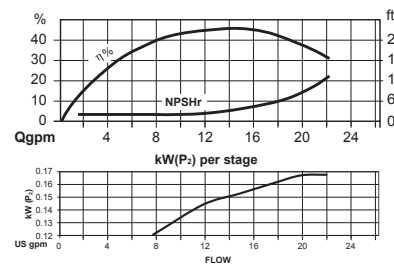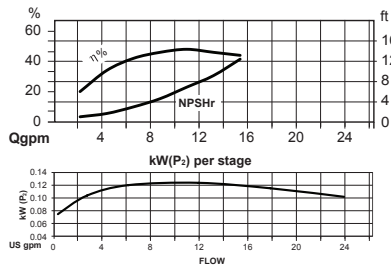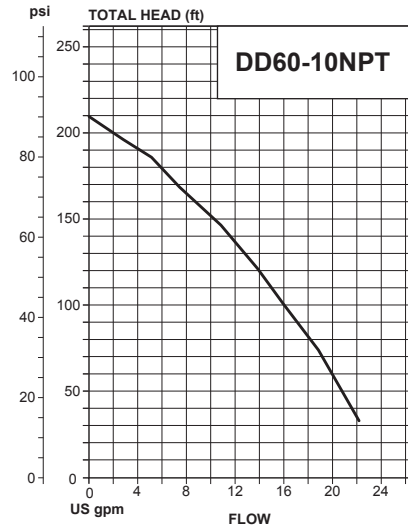

[daveywater.com](http://daveywater.com)

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2023.

DEPEND ON  
**DAVEY**