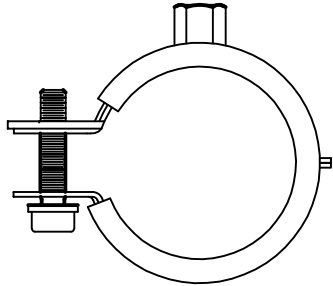


CADDY<sup>®</sup> SUPERFIX 454

CATALOG NUMBER	ØIP	ØCT	PER BOX	PER BAG
454001	1/4"	1/4"	100	25 (4x)
454002	3/8"	1/2"	100	25 (4x)
454003	-	5/8"	100	25 (4x)
454004	1/2"	3/4"	100	25 (4x)
454005	3/4"	1"	100	25 (4x)
454006	1"	1-1/4"	100	25 (4x)
454007	1-1/4"	1-1/2"	50	25 (2x)
454008	1-1/2"	-	50	25 (2x)
454009	-	2"	50	25 (2x)
454010	2"	-	50	25 (2x)
454011	-	2-1/2"	25	-
454012	2-1/2"	-	25	-
454013	-	3"	25	-
454014	3"	-	25	-
454015	-	3-1/2"	25	-
454016	3-1/2"	4"	25	-
454017	4"	-	25	-

## INSTALLATION

- Insert pipe or tube
- Close pipe clamp by pressing the open clamp part upwards
- Let screw lock in the tabs
- Use a screwdriver to tighten the screw
- Tighten pipe clamp until tabs are parallel

## MAXIMUM RECOMMENDED LOADS





- 180 lbs. for 1/4" - 2"
- 300 lbs. for 2-1/2" - 4"

Finish: Electro galvanized zinc

Rubber: EPDM shore A 45°

Fire rating according DIN EN 13105-1 Class E

3/8" Rod Size →

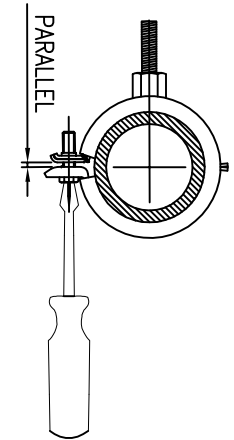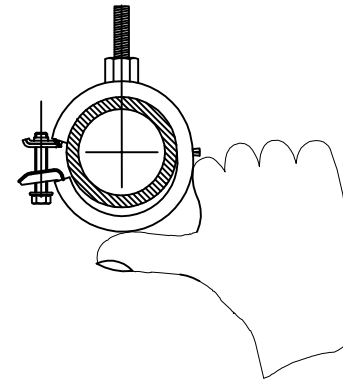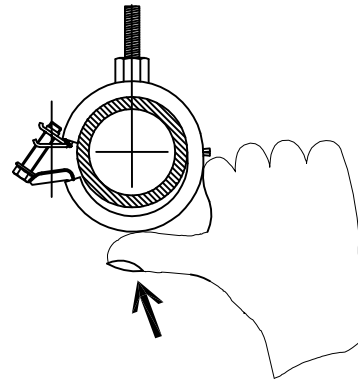

## WARNING

1. ERICO products shall be installed and used only as indicated in ERICO product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your ERICO customer service representative.
2. ERICO products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.
5. Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
6. All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- a. Conformance to all governing codes.
- b. The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- c. Using appropriate industry standard hardware as noted above.

SAFETY INSTRUCTIONS: All governing codes and regulations and those required by the job site must be observed. Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are registered trademarks of ERICO International Corporation.



TECHNICAL SUPPORT:  
[www.erico.com](http://www.erico.com)

IS50\_B

1 of 1

© 2006 ERICO, INC.