


Uniframe LED trims

6 3/4" Trims





6 3/4" Deep anodized



Reflector

| | |
|---------------|----------------|
| 1145 | Specular gold |
| 1146 | Specular clear |
| 1146CD | Clear diffuse |


6 3/4" Step baffle



Reflector

| | |
|----------------|--|
| 1105 | Matte black |
| 1105NM | Matte black, natural metal flange |
| 1105BNM | Natural metal baffle, natural metal flange |
| 1105WH | Matte white |


6 3/4" Shallow anodized



Reflector

| | |
|---------------|----------------|
| 1143 | Specular gold |
| 1144 | Specular clear |
| 1144CD | Clear diffuse |


6 3/4" Basic baffle



Reflector

| | |
|---------------|-------------|
| 1176 | Black |
| 1176WH | Gloss white |


6 3/4" Aperture cone



Reflector

| | | | |
|---------------|----------------|-----------------|--------------------------------------|
| 1108 | Brushed gold | 1108NM | Brushed gold, natural metal flange |
| 1110 | Brushed clear | 1110NM | Brushed clear, natural metal flange |
| 1112 | Specular gold | 1112NM | Specular gold, natural metal flange |
| 1113 | Specular clear | 1113NM | Specular clear, natural metal flange |
| 1113BK | Specular black | 1113BKNM | Specular black, natural metal flange |
| 1113CD | Clear diffuse | 1113CDNM | Clear diffuse, natural metal flange |
| 1113WH | Matte white | | |


6 3/4" Cross blade



Reflector

| | |
|-------------|-------|
| 1132 | White |
|-------------|-------|

6 3/4" Basic white reflector



Reflector

| | |
|-------------|-------------|
| 1171 | Gloss white |
|-------------|-------------|

Lytecaster LED retrofit


6 3/4" Trims

Lytecaster significantly expands the flexibility of its LED offering with the compatibility of dozens of existing trim styles. This approach provides numerous advantages:

- Provide superior aesthetics, cut-off and performance
- Maintain consistency across the ceiling
- Expand your design options with numerous trim styles and finishes
- No dedicated optics. Use existing inventory.
- For use with the 1002P1 frame-in kit



6 3/4" Deep anodized




Reflector

| | |
|--------|----------------|
| 1145 | Specular gold |
| 1146 | Specular clear |
| 1146CD | Clear diffuse |

| Retro frame-in kit for LED | Lamping | Wattage (non dim / dim) |
|----------------------------|---------|-------------------------|
| L56LED Series | 900 lms | 19W / 23W |

6 3/4" shallow anodized




Reflector

| | |
|--------|----------------|
| 1143 | Specular gold |
| 1144 | Specular clear |
| 1144CD | Clear diffuse |

| Retro frame-in kit for LED | Lamping | Wattage (non dim / dim) |
|----------------------------|---------|-------------------------|
| L56LED Series | 900 lms | 19W / 23W |

6 3/4" Aperture cone



Reflector

| | | | |
|--------|----------------|----------|--------------------------------------|
| 1108 | Brushed gold | 1108NM | Brushed gold, natural metal flange |
| 1110 | Brushed clear | 1110NM | Brushed clear, natural metal flange |
| 1112 | Specular gold | 1112NM | Specular gold, natural metal flange |
| 1113 | Specular clear | 1113NM | Specular clear, natural metal flange |
| 1113BK | Specular black | 1113BKNM | Specular black, natural metal flange |
| 1113CD | Clear diffuse | 1113CDNM | Clear diffuse, natural metal flange |
| 1113WH | Matte white | | |

| Retro frame-in kit for LED | Lamping | Wattage (non dim / dim) |
|----------------------------|---------|-------------------------|
| L56LED Series | 900 lms | 19W / 23W |

* Lumen performance varies by color temperature, driver and trim option. Please reference specification sheets for performance details.

† 1500 lumen product has dimming standard.




Lytecaster line voltage

6 3/4" Reflector trims

- Aperture cone downlights utilize an Anobrite® aluminum upper reflector for excellent performance. These versatile downlights are 25% more efficient than basic black baffles, offer better glare control, and are available in a wide choice of finishes.
- Cross blade features an aluminum louver that shields the light source and provides a soft, scallop-free beam. Excellent for corridors or lighting kitchen cabinets.
- Die cast step baffle offers excellent glare control and quality in a classic baffled design.

6 3/4" Aperture cone



A19

100W A19 Single Unit

| Ht. to Floor | F.C. at 30" above floor | Beam Dia. |
|--------------|-------------------------|-----------|
| 8' | 14 | 14" |
| 10' | 8 | 19" |
| 12' | 5 | 23" |

Multiple units /S.R.=1.6

| Ctr. to Ctr. | Footcandles | |
|--------------|-------------|-----------|
| | Lrg. Room | Sml. Room |
| 4' | 74 | 59 |
| 6' | 33 | 26 |
| 8' | 19 | 15 |

PAR38

120W PAR38 FL (T-H)

| Ht. to Floor | F.C. at 30" above floor | Beam Dia. |
|--------------|-------------------------|-----------|
| 8' | 119 | 4' |
| 10' | 64 | 5' |
| 12' | 40 | 7' |

Multiple units /S.R.=0.7

| Ctr. to Ctr. | Footcandles | |
|--------------|-------------|-----------|
| | Lrg. Room | Sml. Room |
| 4' | 125 | 108 |
| 6' | 55 | 48 |
| 8' | 31 | 27 |


| kit | Ceiling | Lamping | | | |
|-----------|------------------|----------|------|-------------|------------|
| | | A19 | A21 | BR40 | PAR38 |
| 1102P1 | Non-IC | 100W | 150W | 150W | 150W |
| 1103R | Non-IC exist. | 100W | 150W | 150W | 150W |
| 1104ICX** | AirSeal IC | 60W | — | 120W (100W) | 100W (90W) |
| 1100DAICM | Deep AirSeal IC | 75W | — | 100W | 90W |
| 1100DICM | Deep IC | 75W | — | 100W | 90W |
| 1104IC** | IC/Non-IC | 60W/100W | — | 65W/150W | 75W/100W |
| 1104ICR | IC/Non-IC exist. | 60W/100W | — | 65W/150W | 75W/100W |
| 1100IC | IC | 75W | — | 100W | 90W |
| 1100AICM | AirSeal IC | 75W | — | 100W | 90W |

Reflector

| | | | |
|--------|----------------|----------|--------------------------------------|
| 1108 | Brushed gold | 1108NM | Brushed gold, natural metal flange |
| 1110 | Brushed clear | 1110NM | Brushed clear, natural metal flange |
| 1112 | Specular gold | 1112NM | Specular gold, natural metal flange |
| 1113 | Specular clear | 1113NM | Specular clear, natural metal flange |
| 1113BK | Specular black | 1113BKNM | Specular black, natural metal flange |
| 1113CD | Clear diffuse | 1113CDNM | Clear diffuse, natural metal flange |
| 1113WH | Matte white | | |

() = Wattage for 1113BK & 1113BKNM

6 3/4" Step baffle



A19

100W A19 Single Unit

| Ht. to Floor | F.C. at 30" above floor | Beam Dia. |
|--------------|-------------------------|-----------|
| 8' | 11 | 10" |
| 10' | 6 | 13" |
| 12' | 4 | 17" |

Multiple units /S.R.=1.3

| Ctr. to Ctr. | Footcandles | |
|--------------|-------------|-----------|
| | Lrg. Room | Sml. Room |
| 4' | 37 | 31 |
| 6' | 16 | 14 |
| 8' | 9 | 8 |

PAR38

120W PAR38 FL (T-H)

| Ht. to Floor | F.C. at 30" above floor | Beam Dia. |
|--------------|-------------------------|-----------|
| 8' | 191 | 2' |
| 10' | 103 | 3' |
| 12' | 64 | 4' |

Multiple units /S.R.=0.4

| Ctr. to Ctr. | Footcandles | |
|--------------|-------------|-----------|
| | Lrg. Room | Sml. Room |
| 4' | 109 | 96 |
| 6' | 49 | 43 |
| 8' | — | — |


Reflector

| | |
|---------|--|
| 1105 | Matte black |
| 1105NM | Matte black, natural metal flange |
| 1105BNM | Natural metal baffle, natural metal flange |
| 1105WH | Matte white |

| kit | Ceiling | Lamping | | | | |
|-----------|------------------|---------|------|------|------|-------|
| | | A19 | A21 | BR30 | BR40 | PAR38 |
| 1102P1 | Non-IC | 100W | 150W | — | 150W | 150W |
| 1103R | Non-IC exist. | 100W | 150W | — | 150W | 150W |
| 1104ICX** | AirSeal IC | 60W | — | — | 100W | 90W |
| 1100DAICM | Deep AirSeal IC | 60W | — | — | 100W | 100W |
| 1100DICM | Deep IC | 60W | — | — | 100W | 100W |
| 1104IC** | IC/Non-IC | 40W/ | — | 75W/ | 65W/ | 75W/ |
| | | 75W | — | 85W | 120W | 90W |
| 1104ICR | IC/Non-IC exist. | 40W/ | — | 75W/ | 65W/ | 75W/ |
| | | 75W | — | 85W | 120W | 90W |
| 1100IC | IC | 60W | — | — | 100W | 100W |
| 1100AICM | AirSeal IC | 60W | — | — | 100W | 100W |

Accepts Lytegems, see page 1.333.

6 3/4" Cross blade



A19

100W A19 Single Unit

| Ht. to Floor | F.C. at 30" above floor | Beam Dia. |
|--------------|-------------------------|-----------|
| 8' | 8 | 14" |
| 10' | 4 | 20" |
| 12' | 3 | 25" |

Multiple units /S.R.=1.8

| Ctr. to Ctr. | Footcandles | |
|--------------|-------------|-----------|
| | Lrg. Room | Sml. Room |
| 4' | 57 | 43 |
| 6' | 25 | 19 |
| 8' | 14 | 11 |

PAR38

150W PAR38 FL (T-H)

| Ht. to Floor | F.C. at 30" above floor | Beam Dia. |
|--------------|-------------------------|-----------|
| 8' | 153 | 2' |
| 10' | 82 | 3' |
| 12' | 51 | 4' |

Multiple units /S.R.=0.4

| Ctr. to Ctr. | Footcandles | |
|--------------|-------------|-----------|
| | Lrg. Room | Sml. Room |
| 4' | 100 | 87 |
| 6' | 45 | 39 |
| 8' | — | — |

| Reflector | Frame-in | Lamping | | | | |
|-----------|----------|-----------|------------------|---------|---------|------|
| | | Ceiling | A19 | PAR30 | PAR38 | |
| 1132 | White | kit | | | | |
| | | 1102P1 | Non-IC | 100W | — | 150W |
| | | 1103R | Non-IC exist. | 100W | — | 150W |
| | | 1104ICX** | AirSeal IC | 52W | 75W | — |
| | | 1100DAICM | Deep AirSeal IC | 60W | — | 90W |
| | | 1100DICM | Deep IC | 60W | — | 90W |
| | | 1104IC** | IC/Non-IC | 40W/60W | 50W/75W | — |
| | | 1104ICR | IC/Non-IC exist. | 40W/60W | 50W/75W | — |
| | | 1100IC | IC | 60W | 75W | — |
| | | 1100AICM | AirSeal IC | 60W | 75W | — |



Lytecaster compact fluorescent

6 3/4" Reflector trims


For applications demanding higher light output, these Energy Smart 6 3/4" open downlights offer all the performance required in ceilings up to 12 feet.

6 3/4" Open

- Choose from one and two-light 13W quad tube units or one-light 13W, 18W, 26W or 32W Triple tube units.
- Triple tube lamps provide a powerful, compact source that delivers superior energy efficiency and a better distribution of light. They also produce better lumen output over a wider range of ambient temperatures than quad tube lamps.
- Deep anodized provides the highest output and best lamp shielding. Aperture cones offer improved glare control.

Deep anodized

2-position socket cup accommodates various lamp types.

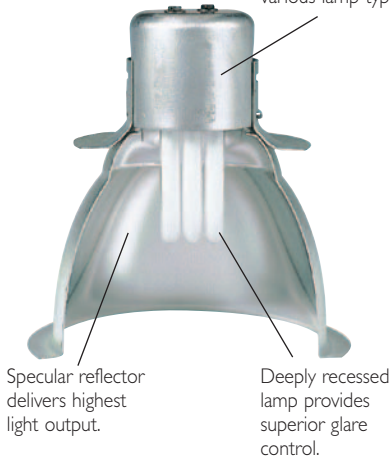

* = Series contains Energy Star® qualified frame-in kits

Accepts Lytegems, see page 1.333.




6 3/4" Deep anodized



Reflector

| | |
|---------------|------------------------|
| 1145 | Specular gold |
| 1146 | Specular clear |
| 1146CD | Specular clear diffuse |




| Frame-in kit | Wattage | Lamping |
|---------------------------|-----------|--------------------|
| 1100FT Series* | 26/32W | (1) Triple |
| 1101F18 Series | 18W | (1) Triple or quad |
| 1101F2642 Series | 26/32/42W | (1) Triple |
| 1101FD26L Series | 26W | (1) Triple or quad |
| 1101FD32L Series | 32W | (1) Triple |
| 1101FD2642M Series | 26W | (1) Triple |
| 1101F18IC Series | 18W | (1) Triple or quad |
| 1101F2642IC Series | 26W | (1) Triple |
| 1101FDIC Series | 26W | (1) Triple or quad |
| | 32/42W | (1) Triple |

6 3/4" Shallow anodized



Reflector

| | |
|---------------|------------------------|
| 1143 | Specular gold |
| 1144 | Specular clear |
| 1144CD | Specular clear diffuse |




| Frame-in kit | Wattage | Lamping |
|---------------------------|---------|--------------------|
| 1100FT Series* | 26/32W | (1) Triple |
| 1104F13 Series* | 13W | (1) Triple or quad |
| 1104F18 Series* | 18W | (1) Triple or quad |
| 1104F2632 Series* | 26/32W | (1) Triple |
| 1101F18 Series | 18W | (1) Triple |
| 1101F2642 Series | 26W | (1) Triple |
| 1101FD26L Series | 26W | (1) Triple |
| 1101FD2642M Series | 26W | (1) Triple |
| 1101F18IC Series | 18W | (1) Triple |
| 1101F2642IC Series | 26W | (1) Triple |

6 3/4" Aperture cone



Reflector

| | |
|---------------|----------------|
| 1108 | Brushed gold |
| 1110 | Brushed clear |
| 1112 | Specular gold |
| 1113 | Specular clear |
| 1113BK | Specular black |
| 1113CD | Clear diffuse |
| 1113WH | Matte white |



| Frame-in kit | Wattage | Lamping |
|---------------------------|---------|--------------------|
| 1100FT Series* | 26/32W | (1) Triple |
| 1104F13 Series* | 13W | (1) Triple or quad |
| 1104F18 Series* | 18W | (1) Triple or quad |
| 1104F2632 Series* | 26/32W | (1) Triple or quad |
| 1101F18 Series | 18W | (1) Triple or quad |
| 1101F2642 Series | 26W | (1) Triple |
| 1101FD26L Series | 26W | (1) Triple |
| 1101FD32L Series | 32W | (1) Triple |
| 1101FD2642M Series | 26W/32W | (1) Triple |
| 1101F18IC Series | 18W | (1) Triple or quad |
| 1101F2642IC Series | 26/32W | (1) Triple |
| 1101FDIC Series | 26/32W | (1) Triple |


| | |
|-----------------|--------------------------------------|
| 1108NM | Brushed gold, natural metal flange |
| 1110NM | Brushed clear, natural metal flange |
| 1112NM | Specular gold, natural metal flange |
| 1113NM | Specular clear, natural metal flange |
| 1113BKNM | Specular black, natural metal flange |
| 1113CDNM | Clear diffuse, natural metal flange |

6 3/4" Step baffle



Reflector

| | |
|----------------|--|
| 1105 | Matte black |
| 1105WH | Matte white |
| 1105NM | Matte black, natural metal flange |
| 1105BNM | Natural metal baffle, natural metal flange |



| Frame-in Kit | Wattage | Lamping |
|---------------------------|---------|--------------------|
| 1100FT Series* | 26/32W | (1) Triple |
| 1104F13 Series* | 13W | (1) Triple or quad |
| 1104F18 Series* | 18W | (1) Triple or quad |
| 1104F2632 Series* | 26/32W | (1) Triple or quad |
| 1101F18 Series | 18W | (1) Triple or quad |
| 1101F2642 Series | 26W | (1) Triple |
| 1101FD26L Series | 26W | (1) Triple |
| 1101FD32L Series | 32W | (1) Triple |
| 1101FD2642M Series | 26/32W | (1) Triple |
| 1101F18IC Series | 18W | (1) Triple or quad |
| 1101F2642IC Series | 26/32W | (1) Triple |
| 1101FDIC Series | 26/32W | (1) Triple |