



# Lytecaster line voltage

## 6 3/4" Reflector trims

- Basic baffle features a Perma White upper reflector and a phenolic baffle to reduce glare.
- Shallow plenum baffle is compatible with 6 3/4" Shallow Lytening, which fits into 2" x 6" construction.

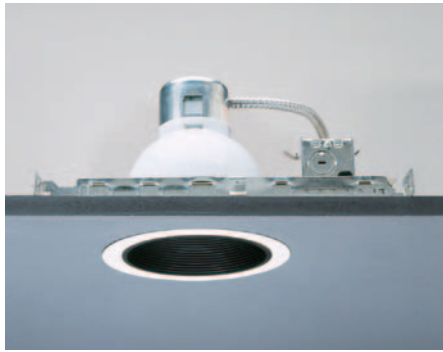

### 6 3/4" Basic baffle



#### A19

100W A19 Single Unit		
Ht. to Floor	F.C. at 30" above floor	Beam Dia.
8'	11	8'
10'	6	11'
12'	4	14'
Multiple units /S.R.=1.1		
Ctr. to Ctr.	Footcandles	
	Lrg. Room	Sml. Room
4'	34	27
6'	15	12
8'	8	7

#### BR40


150W BR40 FL Single		
Ht. to Floor	F.C. at 30" above floor	Beam Dia.
8'	39	6'
10'	21	9'
12'	13	11'
Multiple units /S.R.=0.9		
Ctr. to Ctr.	Footcandles	
	Lrg. Room	Sml. Room
4'	84	68
6'	37	30
8'	21	17

Reflector

- 1176** Black
- 1176WH** Gloss white

kit	Ceiling	Lamping			
		A19	BR30	BR40	PAR38
<b>1102P1</b>	Non-IC	100W	—	150W	150W
<b>1103R</b>	Non-IC exist.	100W	—	150W	150W
<b>1104ICX**</b>	AirSeal® IC	52W	—	90W	90W
<b>1100DAICM</b>	Deep AirSeal® IC	40W	—	100W	90W
<b>1100DICM</b>	Deep IC	40W	—	100W	90W
<b>1104IC**</b>	IC/Non-IC	40W/60W	65W/85W	65W/120W	—/90W
<b>1104ICR</b>	IC/Non-IC exist.	40W/60W	65W/85W	65W/120W	—/90W
<b>1100IC</b>	IC	40W	—	100W	90W
<b>1100AICM</b>	AirSeal® IC	40W	—	100W	90W

### 6 3/4" Basic baffle



#### A19

75W A19 Single Unit		
Ht. to Floor	F.C. at 30" above floor	Beam Dia.
8'	5	14'
10'	3	19'
12'	2	23'
Multiple units /S.R.=1.4		
Ctr. to Ctr.	Footcandles	
	Lrg. Room	Sml. Room
4'	21	16
6'	9	7
8'	5	4

#### PAR30


75W PAR30 FL (TH)		
Ht. to Floor	F.C. at 30" above floor	Beam Dia.
8'	75	4'
10'	40	5'
12'	25	7'
Multiple units /S.R.=0.7		
Ctr. to Ctr.	Footcandles	
	Lrg. Room	Sml. Room
4'	74	69
6'	33	29
8'	19	16

Reflector

- 1179M1** Black baffle
- 1179WH** Gloss white

kit	Ceiling	Lamping			
		A19	BR30	PAR30	PAR38
<b>1102P1</b>	Non-IC	75W	85W	75W	—
<b>1103R</b>	Non-IC exist.	75W	85W	75W	—
<b>1104ICX**</b>	AirSeal® IC	—	85W	75W	—
<b>1100DAICM</b>	Deep AirSeal IC	—	85W	75W	—
<b>1100DICM</b>	Deep IC	—	85W	75W	—
<b>1104IC**</b>	IC/Non-IC	—	85W/85W	75W/75W	90W/90W
<b>1104ICR</b>	IC/Non-IC exist.	—	85W/85W	75W/75W	90W/90W
<b>1100IC</b>	IC	—	85W	75W	—
<b>1100AICM</b>	AirSeal® IC	—	85W	75W	—

### 6 3/4" Shallow plenum baffle



kit	Ceiling	Lamping	
		BR30	PAR30
<b>1104IC**</b>	IC/Non-IC	65W/85W	75W Long neck
<b>1104ICR</b>	IC/Non-IC exist.	65W/85W	75W Long neck
<b>1104SIC*</b>	Shallow IC/ Non-IC	65W/85W	75W Long neck
<b>1104SICR</b>	Shallow IC/ Non-IC exist.	65W/85W	75W Long neck

Reflector

- B16** Gloss white spray
- B17** Black baffle
- B17WH** Gloss white baffle

\* For nail version add "N" suffix.  
 \*\* For nail version add "N" suffix.  
 For quick connects add "Q" suffix.  
 For nail & quick connects add "NQ" suffix.  
 D: See compatible FIK for depth – page 1.280.