

# Drain-Rooter PH™

**THE CLEAN MACHINE!**



Equipped with a variable speed power cable feed and variable speed motor, the Drain-Rooter PH makes drain cleaning jobs cleaner and easier.

The Drain-Rooter PH feeds and retrieves the cable at up to 16 feet per minute. A four-foot guide hose eliminates cable whipping, dirty fixtures and messy floors. And the drum speed can be varied by changing the pressure on the foot pedal, making it easier to thread the boring head through strainers or crossbars.

The Drain-Rooter PH is a real labor-saver on long jobs or when working in a cramped area where the weight of the machine could get burdensome. It can be operated in both horizontal and vertical positions to get closer to the drain opening.

A quick-change cartridge system allows you to switch to a different diameter cable without pulling the old cable out of the drum – another way the Drain-Rooter PH is a clean machine.



**The toughest tools down the line.™**

**General** / **General Wire Spring Co.**  
**PIPE CLEANERS**

1101 Thompson Avenue • McKees Rocks, PA 15136 USA  
800-245-6200 or 412-771-6300 • Fax: 412-771-2771  
www.drainbrain.com • e-mail: info@drainbrain.com

Continued next page

# Drain-Rooter PH Units

Complete and Ready to Operate

Basic Units Include:

- Variable Speed Power Cable Feed
- Variable Speed Motor with Reverse Switch
- Water-Proof Air Foot Switch
- Quick Change Plastic Cartridge
- Four Foot Guide Hose

**PH-DR-A** with 50 ft. x 5/16" (50HE1-A-DH) cable.  
Boxed Wt. 40 lbs.

**PH-DR-B** with 50 ft. x 5/16" (50HE1-AC) cable, and HECS cutter set.  
Boxed Wt. 40 lbs.

**PH-DR-C** with 35 ft. x 3/8" (35HE2) cable, and HECS cutter set.  
Boxed Wt. 38 lbs.

**PH-DR-D** with 50 ft. x 1/4" (50HE1-DH) cable.  
Boxed Wt. 37 lbs.


## FLEXICORE® CABLE



### Wire Rope Center Construction

Heavy-gauge wire coiled tightly around 42-strand aircraft-type wire rope and heat treated. Has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870

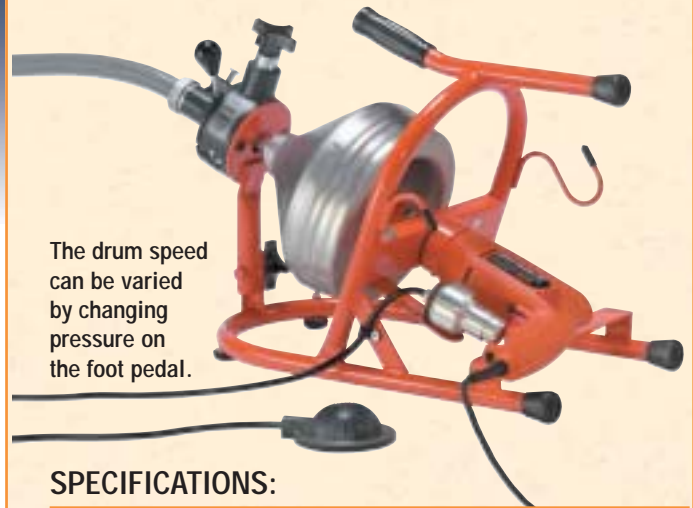

The drum speed can be varied by changing pressure on the foot pedal.

## SPECIFICATIONS:

### Weight:

Weight: 22 lbs. (10 kg) (without cable)

### Dimensions:

22" deep x 13-1/2" wide x 15" high (without hose)  
(56 cm x 34 cm x 38 cm)

### Drum:

Heavy gauge stamped aluminum with inner drum to prevent cable tangling.

### Capacity:

50 ft. of 1/4" or 5/16" cable; 35 ft. of 3/8" cable. All cables are left hand wound and reinforced with a wire rope center.

### Power Cable Feed:

Drives 1/4", 5/16" and 3/8" cables.

### Cutter Set:

See below.

### Motor:

All ball-bearing, double insulated, reversible motor with speed control; 0-500 rpm, 230 and 240 volts available.

### Foot Pedal:


Pneumatic foot pedal controls variable speed motor. Leaves operator's hands free to control cable.

*Motor UL Registered*

## 5-Piece Cutter Set *For Use Only With Cables Having Connectors*



**AH**  
Arrow Head  
Starting Drill



**BG**  
Boring  
Gimlet



**DHBG**  
Down Head  
Boring Gimlet



**1-1/4 SCB**  
1-1/4" Side  
Cutter Blade  
(2 piece set)



**FAH**  
Flexible Spring  
Arrow Head  
Cutter

**The toughest tools down the line.™**

**General** / **General Wire Spring Co.**  
**PIPE CLEANERS**

1101 Thompson Avenue • McKees Rocks, PA 15136 USA  
800-245-6200 or 412-771-6300 • Fax: 412-771-2771  
www.drainbrain.com • e-mail: info@drainbrain.com