


Please use work gloves for the following steps:




1.) Open diffuser damper

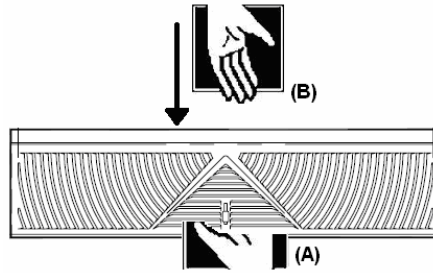

2.) Support diffuser by its top as shown with one hand (A) entering the bottom with the other hand (B)



3.) Push grille away from frame at the top end.
The grille is a press fit into the frame at the top.

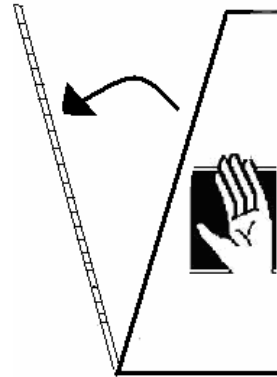

4.) Remove grille from hinge and mount frame.