

DUAL READOUT THERMOMETER



Makes Calculations Easier

The industry's only manifold-compatible compact thermometer with two readings to help simplify the calculation of superheat and subcool.




Superior Versatility

Use it on any gauge set, or remove it and use it independently.



Reads Temperatures Quickly

Two easy-to-use, K-style tube clamp thermocouples get you to the temperature reading quickly.

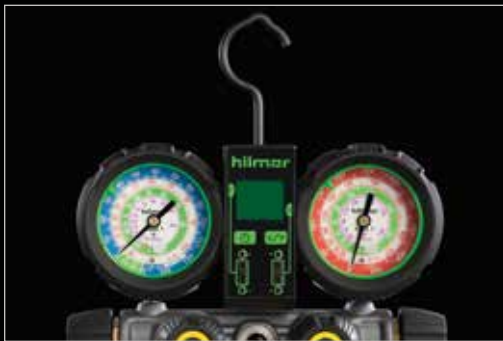

This thermometer is the first in the industry to attach to any manifold.

Item Specifications

| Item Number | 1839106 | | |
|-----------------------------|---------------------------------|----------------------|----------|
| Product Description | DROT2TCC | | |
| Thermocouples Included | 1839108 TCC Thermocouple Clamps | | |
| Batteries | AA x 1 (included) | | |
| Battery Life | 151 hours | | |
| Connection Type | K | | |
| Measurement | Range | Resolution | Accuracy |
| Temperature | -76°F to 999.9°F | 0.1° F/C | ±2.0°C |
| Operating Temperature Range | | -10°C to +50°C (LCD) | |
| Product Dimensions | | | |
| Length | 1-3/4" | | |
| Width | 1-5/8" | | |
| Height | 3-7/8" | | |
| Weight | .7 lbs | | |



Dual Readout Thermometer
1839106