

HOLDRITE EZ-STRUT™ – #EZ-1, #EZ-2

- Ideal for multiple pipe run applications including Gas, Copper, CPVC, & PEX
- Galvanized steel trapeze platform with telescoping design
- Works best with HOLDRITE #250 and #280 Clamps
- Attaches to standard all-thread rod with load rating up to 1,000 pounds
- Includes four screws


Model#	Size	For Pipe Size(s)	Box Qty
EZ-1	12" to 21"	Various	25
EZ-2	23" to 40"	Various	25



HOLDRITE VARIABLE CLAMPS – #250, #280

- Ideal for securing tubing to EZ-Strut trapeze platform
- Sound-rated/isolation variable closure clamps
- Fire retardant framework meets requirements of UL 94 V-2 rating
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds

Model#	Size	For Pipe Size(s)	Box Qty
250	2-3/8" X 2-5/8"	3/8" to 1" CTS	50
280	4-3/8" X 5-1/8"	1" to 2" CTS/IPS	50

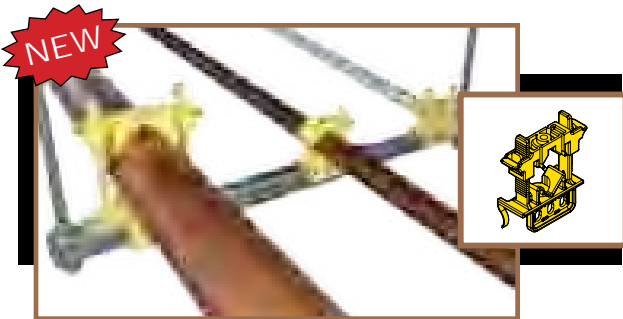

HOLDRITE CLAMPS – #250-S, #280-S

- Ideal for securing tubing to EZ-Strut trapeze platform
- Meets requirements of UL 94 V-0 and ASTM E84 25/50 ratings
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds

Model#	Size	For Pipe Size(s)	Box Qty
250-S	2-3/8" X 2-5/8"	3/8" to 1" CTS	50
280-S	4-3/8" X 5-1/8"	1" to 2" CTS/IPS	50



HOLDRITE STRUT CLAMP – #257-S, #287-S

- Ideal for securing Copper, PEX, CPVC, and gas tubing directly to strut/channel
- No tools required and eliminates need for over 20 strut clamp SKUs
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds
- Provides dissimilar metal isolation
- Meets requirements of UL 94 V-0 and ASTM E84 25/50 ratings

Model#	Size	For Pipe Size(s)	Box Qty
257-S	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
287-S	3-1/2" x 4-7/8"	1" - 2" CTS/IPS	50



HOLDRITE STRUT CLAMP – #257, #287 #257-P, #287-P

- Ideal for securing Copper, PEX, CPVC, and gas tubing directly to strut/channel
- #257-P, #287-P include sound-rated/isolation pads to reduce noise & vibration
- No tools required and eliminates need for over 20 strut clamp SKUs
- Supports 3/8" to 2" tubing/piping with load rating of up to 300 pounds
- Fire retardant framework meets requirements of UL 94 V-2 rating

Model#	Size	For Pipe Size(s)	Box Qty
257	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
257-P	2-1/2" x 2-7/8"	3/8" - 1" CTS	50
287	3-1/2" x 4-7/8"	1" - 2" CTS/IPS	50
287-P	3-1/2" x 4-7/8"	1" - 2" CTS/IPS	50

Hubbard Enterprises/HOLDRITE Material "Take-off" Sheet and 2009 Catalog Page # Locator (Cont.)

Model#	QTY	DESCRIPTION	BOX QTY	CATALOG PAGE #
211		Half moon, fire retardant PVC Clamp for 1/2" tube, UL94V0	100	13, 39, 42, 43
212		Half moon, fire retardant PVC Clamp for 3/4" tube, UL94V0	100	13, 39
221		1/2" Suspension tube clamp	100	13, 33, 38, 39, 43
222		3/4" Suspension tube clamp	100	13, 33
221-S		1/2" Suspension tube clamp; meets ASTM E-84 25/50	100	34
222-S		3/4" Suspension tube clamp; meets ASTM E-84 25/50	100	34
223		1" Suspension tube clamp	50	13, 33
224		1-1/4" Suspension tube clamp	25	13, 33
225		1-1/2" Suspension tube clamp	25	13, 33
226		2" Suspension tube clamp	25	13, 33
231		1/2" Standard tube clamp	100	13, 33, 38, 43
232		3/4" Standard tube clamp	100	13, 33, 43
231-S		1/2" Standard tube clamp; meets ASTM E-84 25/50	100	34
232-S		3/4" Standard tube clamp; meets ASTM E-84 25/50	100	34
233		1" Standard tube clamp	50	13, 33
234		1-1/4" Standard tube clamp	25	13, 33
235		1-1/2" Standard tube clamp	25	13, 33
236		2" Standard tube clamp	25	13, 33
250		Sound rated variable closure clamp. Supports up to 1" CTS sizes.	50	21, 25, 28, 39, 40, 41, 42, 43, 44
250-S		Variable closure clamp-supports up to 1" CTS sizes; meets ASTM E-84 25/50	50	21, 34, 41, 42, 43
251		Variable closure clamp support up to 1" CTS. Mounts to #170 bracket with no tools/hardware	50	32
255		Acoustical standard clamp - supports up to 1" CTS sizes	50	29, 39, 40, 43, 44
255-S		Standard clamp - supports up to 1" CTS sizes; meets ASTM E-84 25/50	50	34
257		Variable size strut clamp. Supports up to 1" CTS	50	21, 42
257-P		Sound rated variable size strut clamp. Supports up to 1" CTS	50	21, 29, 44
257-S		Variable size strut clamp. Supports up to 1" CTS. ASTM E84 25/50 & UL 94 V-0 rated	50	34, 42
261		1/2" Acoustical thru stud isolator/suspension clamp	50	29, 44
262		3/4" Acoustical thru stud isolator/suspension clamp	50	29
263		1" Acoustical thru stud isolator/suspension clamp	50	29, 44
264		1-1/4" Acoustical thru stud isolator/suspension clamp	50	29
265		Shower head acoustic anchor, mounts on Holdrite Stout Bracket to minimize noise & vibration	50	28, 44
270		3/4" Wide acoustical sound insulation lining	50' roll	30
271		2" wide neoprene acoustical noise insulation liner with adhesive backing	25' roll	30, 44
272-2		2" X 1/4" polyester felt. Acoustical noise insulation w/adhesive backing (12 rolls per case)	25' roll	30, 44
274		2" X 2" X 3/4" acoustical riser clamp pad (36 pads/sheet and 5 sheets/box = 180 pads)	180	30, 44
275		2" X 2" X 3/4" acoustical riser clamp pad w/ 10-gage galv steel bearing plate	144	30, 44
275-T		2" X 2" X 3/4" acoustical riser clamp pad w/ 10-gage galv steel bearing plate & vertical tabs	144	30, 44
276		2" X 2" X 1/4" acoustical riser clamp pad	50	30, 44
278		2" X 2" X 1/4" acoustical riser clamp pad w/ 10 gage galv steel bearing plate	50	30, 44
280		Sound rated variable closure clamp. Supports up to 2" CTS/IPS pipe sizes	50	21, 25, 28, 41, 42, 43, 44
280-S		Variable closure clamp. Supports pipe up to 2" CTS/IPS. ASTM E84 25/50 & UL 94 V-0 rated	50	21, 34, 41, 42, 43
285		Sound rated variable closure clamp. Supports up to 2" CTS/IPS pipe sizes	50	29,
285-S		Variable clamp mounts to flat surface. 1" to 2" CTS/IPS. ASTM E84 25/50 & UL 94 V-0 rated	50	34
287		Variable size strut clamp. Supports up to 1"-2" CTS/IPS. ASTM E84 25/50 & UL 94 V-0 rated	50	21, 42
287-S		Variable size strut clamp. Supports up to 1"-2" CTS/IPS. ASTM E84 25/50 & UL 94 V-0 rated	50	21, 34, 42
287-P		Sound rated variable size strut clamp. Supports up to 1"-2" CTS/IPS pipe sizes	50	21, 29, 44
300		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 1/2" CTS.	100	23, 30
301		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 1/2" IPS & 3/4" CTS.	100	23, 30
302		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 3/4" IPS & 1" CTS.	100	23, 30
303		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 1" IPS & 1-1/4" CTS.	100	23, 30
304		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 1-1/4"-1-1/2" IPS & 1-1/2" CTS.	100	23, 30
306		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 2" IPS & 2" CTS.	100	23, 30
307		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 2-1/2" IPS & 2-1/2" CTS.	50	23, 30
308		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 3" IPS & 3" CTS.	50	23, 30, 44
310		Galvanized steel loop hanger with swivel nut and acoustical rubber liner. 4" IPS & 4" CTS.	25	23, 30
320		Galvanized steel J-hanger with acoustical rubber liner. 1/2" CTS.	50	23, 30
321		Galvanized steel J-hanger with acoustical rubber liner. 1/2" IPS & 3/4" CTS.	50	23, 30, 44
322		Galvanized steel J-hanger with acoustical rubber liner. 3/4" IPS & 1" CTS.	50	23, 30
323		Galvanized steel J-hanger with acoustical rubber liner. 1" IPS & 1-1/4" CTS.	50	23, 30
324		Galvanized steel J-hanger with acoustical rubber liner. 1-1/4" IPS & 1-1/2" CTS.	50	23, 30
325		Galvanized steel J-hanger with acoustical rubber liner. 1-1/2" IPS & 2" CTS.	50	23, 30
326		Galvanized steel J-hanger with acoustical rubber liner. 2" IPS & 2-1/2" CTS.	50	23, 30
327		Galvanized steel J-hanger with acoustical rubber liner. 2-1/2" IPS & 3" CTS.	25	23, 30
328		Galvanized steel J-hanger with acoustical rubber liner. 3" IPS.	25	23, 30
330		Galvanized steel J-hanger with acoustical rubber liner. 4" IPS & 4" CTS.	25	23, 30
40-S-22-A		22" Water heater stand, assembled, supports up to 52 gallons/650 lbs.	1	37
40-S-22-U		22" Water heater stand, unassembled, supports up to 52 gallons/650 lbs.	1	37
40-S-24-A		24" Water heater stand, assembled, supports up to 100 gallons/1,200 lbs.	1	37
40-S-24-U		24" Water heater stand, unassembled, supports up to 100 gallons/1,200 lbs.	1	37