



NEMA 5-15



NEMA 5-20



CSA 24-15R

# QUADPLEX® Receptacles

## 2-Pole 3-Wire Grounding

15 Amp 125V; 20 Amp 125V; 15 Amp 347V

### Features - Specifications

- Rugged Lexan® construction
- Mounts directly to 4" square or octagon boxes, no cover plate required. Meets NEC
- Quadplex can be retrofitted to 1 and 2-gang device boxes, 4" square boxes with mud rings, or 4 1 1/16" square boxes with easy-to-install adapter plates
- Saves wiring and installation time
- Accepts 4 straight or molded angle plugs
- Large #8 brass binding head terminal screws, accepts up to #12 solid or stranded wire
- Approved for CU wire only
- Snub hole for fast, easy terminations
- Break-off tabs for split circuit wiring (except surge units)
- Heavy-duty, triple-wipe, high performance brass line contacts
- Heavy-duty, double-wipe grounding contacts
- Three conductors, hot, neutral and ground, energize all four outlets
- UL Listed File #E2258 – Guide #RTRT (1254, 21254 Series)
- CSA Certified File #LR16215 – Guide #365E1
- NOM
- CE



1254I with ADAP1




21254HW

### QUADPLEX® RECEPTACLES

NEMA 5-15 2P 3W 15 AMP 125V 0.5 HP	NEMA 5-20 2P 3W 20 AMP 125V 1.0 HP	NEMA/ CSA 24-15R 2P 3W 15 AMP 347V	DESCRIPTION
1254B	21254B	—	Brown Lexan
1254I	21254I	—	Ivory Lexan
1254W	21254W	3474W	White Lexan
1254GY	21254GY	—	Gray Lexan
1254R	21254R	—	Red Lexan
1254BLK	21254BLK	—	Black Lexan
1254IGO	21254IGO	—	Isolated ground, orange Lexan
1254IGOB	—	—	Isolated ground, orange Lexan, bulk pkg.
1254SA <sup>①</sup>	21254SA <sup>①</sup>	—	Surge suppression, isolated ground, blue Lexan
1254SIA <sup>①</sup>	21254SIA <sup>①</sup>	—	Surge suppression, isolated ground, ivory Lexan
—	21254IGOL	—	Isolated ground, wire leads, orange Lexan
—	21254SLA <sup>①</sup>	—	Surge supp., wire leads, isol. gd., blue Lexan
—	21254SILA <sup>①</sup>	—	Surge supp., wire leads, isol. gd., ivory Lexan
1254HB	21254HB	—	Hospital grade, brown Lexan
1254HI	21254HI	—	Hospital grade, ivory Lexan
1254HW	21254HW	—	Hospital grade, white Lexan
1254HGY	21254HGY	—	Hospital grade, gray Lexan
1254HR	21254HR	—	Hospital grade, red Lexan
1254HIGO <sup>②</sup>	21254HIGO	—	Hospital grade, isolated ground, orange Lexan
—	21254HBL	—	Hospital grade, wire leads, brown Lexan
—	21254HIL	—	Hospital grade, wire leads, ivory Lexan
1254HIP	21254HIP	—	Hospital grade, ivory Lexan w/pilot light
1254HWP <sup>②</sup>	21254HWP	—	Hospital grade, white Lexan w/pilot light
1254HRP <sup>②</sup>	21254HRP	—	Hospital grade, red Lexan w/pilot light
1254HSA	21254HSA	—	Hospital grade, surge supp., isol. gd., blue Lexan
1254HSIA	21254HSIA	—	Hospital grade, surge supp., isol. gd., ivory Lexan

### PRODUCT DIMENSIONS – ( ) Indicates mm dimensions

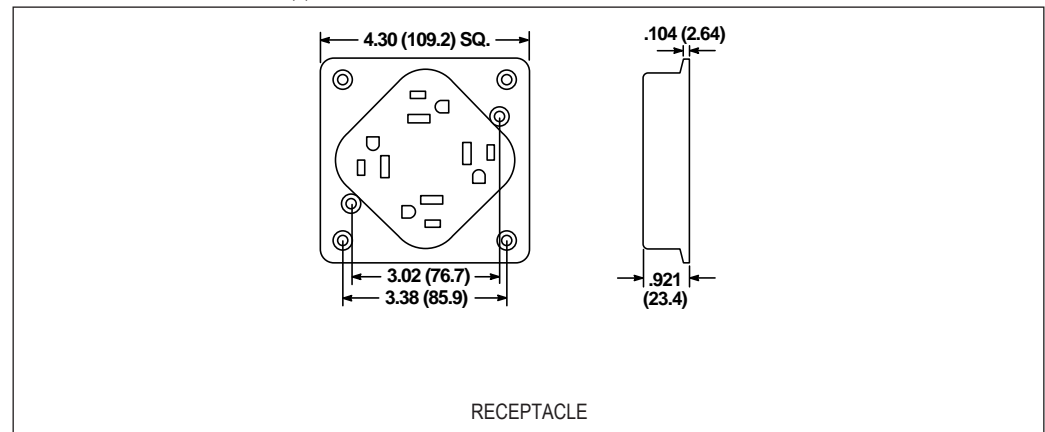

1254SIA

① See page G-8 for additional information on surge receptacles.  
 ② To be discontinued when supplies are exhausted.  
 Lexan® is a registered trademark of General Electric Co.  
 Specifications are subject to change without notice.