

Fluorescent Lampholders

Slimline

Features - Specifications

- Type: Slimline
- Rating: 660W, 600V primary, 1000V secondary
- Molded, white thermoset urea
- Lamp size T6, T8, T12
- Entire contact assembly silver-plated for low contact resistance
- Quickwire terminals accept #18 AWG
- UL Listed
- CSA Certified



4385W7



4386W7



4376




4377

SLIMLINE

| CATALOG NUMBER | DESCRIPTION |
|----------------|---|
| 4385W7 | White stationary end, quick wired with slide-on lugs and solid platform |
| 4386W7 | White plunger end, quick wired with slide-on lugs and solid platform |
| 4376 | White stationary tombstone with p nut and screw installed |
| 4377 | White plunger tombstone with p nut and screw installed |

PRODUCT DIMENSIONS – () Indicates mm dimensions

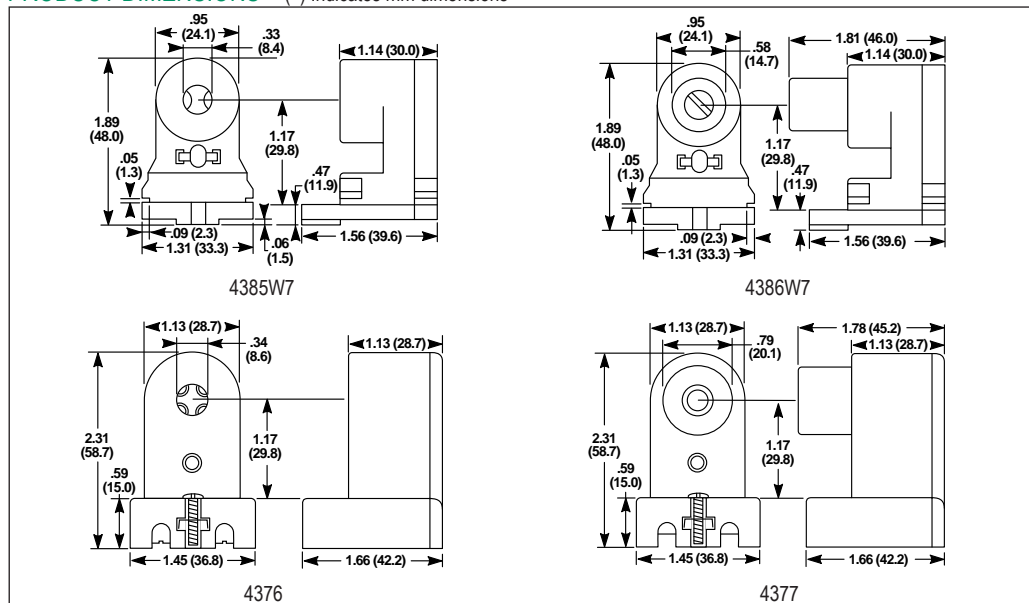

Specifications are subject to change without notice.