



8266N



8269N



8266T



8269T

**Features - Specifications
 HOSPITAL GRADE
 PLUG AND CONNECTOR**

- Bryant "hospital grade" plugs and connectors meet or exceed all UL tests for "hospital grade" and conform to UL Standards #498 and #544
- Impact-resistant Nylon/polymer construction with automatic cord grip
- Available with transparent polycarbonate cover. Allows visual inspection of wire terminations without disassembly
- Pre-attached TPE dust seal helps prevent contaminants from entering wiring chamber
- Two quick-fasten captive assembly screws automatically tighten cord grip
- Single side terminal screws reduce wiring time and are color coded for proper terminations

- Transparent terminal cover allows instant visual inspection for proper terminations
- Tapered individual wire pockets help prevent flashover and speed wiring termination
- Strip gauge for accurate wiring
- Clamp-type terminals
- Conform to Fed. Spec. #WC596

ALL PLUGS AND CONNECTORS

- UL Listed File #E1381 – Guide #AXUT
- CSA Certified File #LR16215– Guide #20T2
- NOM
- CE

"HOSPITAL GRADE" 15 AMP 125V NEMA 5-15

CATALOG NUMBER		CORD DIA.	DESCRIPTION
PLUG	CONNECTOR		
8266N	8269N	.245-.655 (6.2-16.6)	White, nylon/polymer
8266T	8269T	.245-.655 (6.2-16.6)	Transparent, nylon/polycarbonate


"HOSPITAL GRADE" 20 AMP 125V NEMA 5-20

8366N	8369N	.245-.655 (6.2-16.6)	White, nylon/polymer
—	8369NCAN	.245-.655 (6.2-16.6)	White, nylon/polymer, CSA 5-20R configuration
8366T	8369T	.245-.655 (6.2-16.6)	Transparent, nylon/polycarbonate

"HOSPITAL GRADE" 20 AMP 250V NEMA 6-20

8466N	8469N	.245-.655 (6.2-16.6)	White, nylon/polymer
-------	-------	----------------------	----------------------

PRODUCT DIMENSIONS – () Indicates mm dimensions

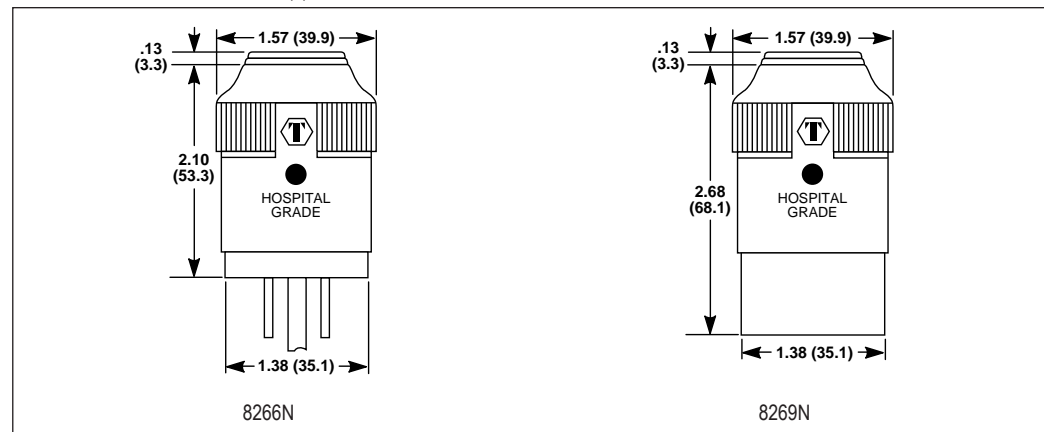

① TPE – Thermoplastic Elastomer.
 See page P-3 for horsepower ratings.
 Specifications are subject to change without notice.