




FLAT GLASS ASSURES
PRECISE FULL CUTOFF
PERFORMANCE

FOUR IES LIGHT
DISTRIBUTION CHOICES

HINGED DIE CAST
ALUMINUM DOOR WITH
CAPTIVE HARDWARE



DECORATIVE STRAIGHT ARM,
DECORATIVE UPSWEPT ARM AND
WALL BRACKET MOUNTING
OPTIONS

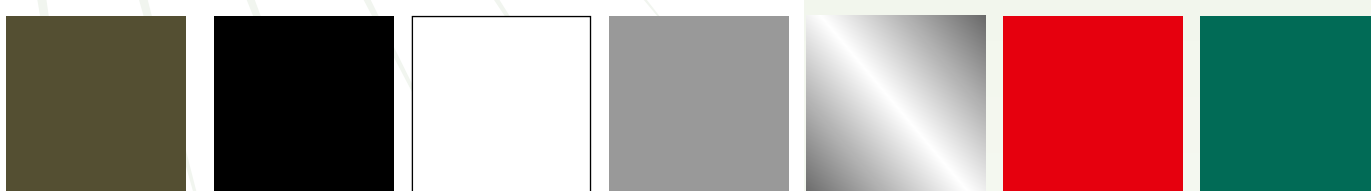

ORDERING INFORMATION

ORDERING EXAMPLE

CR1	-	A	-	H17	-	H2	-	F	-	Q	-	DB	-	PR1
Series		Mounting		Wattage/ Source		Lamp Orientation/Distribution		Lens		Voltage		Color		Options

SERIES

CR1 Cimarron

MOUNTING

- A¹** Arm Mount Construction (6" straight rigid arm included & acceptable for 90° configurations)
- AD¹** Decorative Arm Mount Construction (6" decorative upswept arm included & acceptable for 90° configurations)
- WB** Wall Bracket Construction (includes Wall Bracket & 6" straight arm unless WBAD option is chosen which substitutes Decorative Upswept Arm)
- O** No Arm or Wall Bracket (only order without arm or wall bracket when they are ordered as accessory)

WATTAGE/SOURCE

METAL HALIDE

H17 175W (ED-28)

H25 250W (ED-28)

H40 400W (ED-28)

SUPER METAL HALIDE

MS17 175W (ED-28)

MS25 250W (ED-28)

MS40 400W (ED-28)

PULSE START METAL HALIDE

P10 100W (ED-17)

P12 125W (ED-17)

P15 150W (ED-28)

P20 200W (ED-28)

P25 250W (ED-28)

P32 320W (ED-28)

P35 350W (ED-28)

P40 400W (ED-28)

HIGH PRESSURE SODIUM

S10 100W (ED-23 1/2)

S15 150W (ED-23 1/2)

S25 250W (ED-18)

S40 400W (ED-18)

LAMP ORIENTATION/DISTRIBUTION

H2 Horizontal II

H3 Horizontal III

H4 Horizontal IV

H5 Horizontal V (square)

LENS

F Flat

VOLTAGE

Q Quad-Tap® (120, 208, 240, 277V)

V Five-Tap (120, 208, 240, 277, 480V)
(250 & 400 MH, 250 & 400 HPS only)

5 480V

T 120, 277, 347V

O No Ballast

E 50 Hz 220/240V
(250 & 400 MH, 250 & 400 HPS only)

COLOR

DB Dark Bronze

BL Black

WH White

GR Gray

PS Platinum Silver

RD Red (premium color)

FG Forest Green (premium color)

CC Custom Color (premium color)

OPTIONS

WBAD Substitutes Decorative Upswept Arm when WB wall bracket mounting is chosen

RPA2 Round Pole Adapter (2¾"-3½")

RPA3 Round Pole Adapter (3¼"-3¾")

RPA4 Round Pole Adapter (3⅝"-4½")

RPA5 Round Pole Adapter (5")

RPA6 Round Pole Adapter (6")

F1 Fusing - 120V

F2 Fusing - 208V

F3 Fusing - 240V

F4 Fusing - 277V

F5 Fusing - 480V

F6 Fusing - 247V

P1 Photo Button - 120V

P2 Photo Button - 208V

P3 Photo Button - 240V

P4 Photo Button - 277V

P6 Photo Button - 347V

PR1 Photo Cell Receptacle - 120V

PR2 Photo Cell Receptacle - 208V

PR3 Photo Cell Receptacle - 240V

PR4 Photo Cell Receptacle - 277V

PR5 Photo Cell Receptacle - 480V

PR6 Photo Cell Receptacle - 347V

QZ Quartz RS with lamp

HS Internal House Side Shield
(available for H2, H3 & H4 distributions)

VG Polycarbonate Vandal Guard

L Lamp

SELECT UNITS ARE STOCKED FOR IMMEDIATE SHIPMENT.

¹ When ordering poles, specify Pole Drill Pattern #2 for A and AD mounting.

LEKTROCOTE® FINISH PROCESS

Lektrocote® is a proprietary process where the thermosetting, acid-functional polyester powder resin is electrostatically applied only after a thorough cleaning process. Luminaires receive a five-step wash with both acid and alkaline based liquid cleaners followed by the deposit of a thin layer of proprietary compound to promote maximum corrosion-resistance and paint adhesion. Finally the decorative finish coat is applied.

Lektrocote® meets or exceeds the following standards:

ASTM B-117	1000 hour salt spray test
ASTM B-2247	1000 hour humidity test
ASTM D-2794	Impact test resistant to 160 inch pounds
ASTM D-522	Flexibility test
AAMA 603	Blister/adhesion test

COLOR SELECTIONS

5 standard (Bronze, Black, White, Gray, Platinum Silver).
2 premium (Red, Forest Green) and custom colors
(consult factory) are available.

Note: Actual colors may vary due to printing process.



All colors are textured except Platinum Silver and Red.