Approvals

APPLICATIONS


· Quartz luminaires provide high output, instant on "white light" with low initial investment. Best used for flood applications with short burning hours due to higher energy consumption. Excellent when coupled with motion sensor controls. Great for residential security lighting, temporary work lights or holiday display

Cat.#

Job



Type



	A	В	C	D	E	F
QL-505	4 ⁵ /16"	85/8"	87/8"	5 ¹ /4"	7"	21/2"
	109 mm	219 mm	225 mm	133 mm	179 mm	63 mm
QL-1505	11 ¹ /2"	14"	81/2"			
	292 mm	355 mm	216 mm			

SPECIFICATIONS

- Full size, die cast aluminum housing with deep fins. Tool-free die cast aluminum lens/door assembly. Hinged at bottom for positive compression of silicone gasket. Large 1/2" universal swivel
- 3-piece anodized reflector for wide, uniform beam. Units supplied less lamp. QL 505 (300-500 watt) 120 volt. QL 1505 (1000-1500 watt) lamps available for 1000W-240V; 1500W-208, 240, 277V.
- · Available in gray or bronze powder paint finish

LISTINGS


Listed to UL1598 for use in wet locations





ORDERING INFORMATION

ORDERING EXAMPLE



Catalog Number	Max. Watts	Housing Finish	NEMA Beam Spread H° x V°	Weight Ibs. (kg)	EPA ft² (m²)
Lamp Not Included					
QL-1505 ¹	1000/1500	Gray	6(115°) x 5(78°)	6 (2.7)	.9 (0.1)
QL-505	300/500	Gray	5(88°) x 5(82°)	4 (1.8)	.5 (0.1)
QL-505-BZ	300/500	Bronze	5(88°) x 5(82°)	4 (1.8)	.5 (0.1)

- Do not aim at ±10° from horizontal or higher
- Fixture voltage is controlled by lamp voltage rating


Note: Do not operate on voltage higher than lamp voltage rating, shortens lamp life and increases heat stress within the fixture

REPLACEMENT PARTS

Catalog Number	Description
264-0184-9803	Glass lens QL505
264-0183-9805	Glass lens QL1505
207-5011-0214	Knuckle, gray
800-2166-0108	Replacement Socket QL505
705327	Replacement Socket QL1505


ACCESSORIES - Order Separately

Catalog Number	Description				
- Cananag mambon					
	QL-505 Series				
QL-5G	Vire guard (2 inch square grid) 1 (0.5)				
QL-VS	Top/side visor (max use two - at 180°) .5 (C				
QL-1505 Series					
QL-15G	Wire guard (2 inch square grid)	1.3 (0.6)			
QL-15V	Top visor / bottom visor	1.3 (0.6)			
QL-VS	Side visor (will not work with QL-15V on same fixture) .5 (0.				
QL-500 / QL-1500					
QL-TB	Crossarm trunnion box; Half yoke with large wiring box for mounting to any flat surface,	.8 (0.4)			
	natural aluminum				
S-302	Pole top slipfitter for 1/2" swivel knuckle; slipfits 2 3/8" OD pipe; gray finish	.8 (0.4)			
S-302-M51	Pole-top slipfitter for 1/2" knuckle, slipfits 2 3/8" OD pipe; bronze finish .8 (0.4)				





PHOTOMETRICS For additional photometric information and IES downloads, visit our web site at www.hubbell-ltg.com

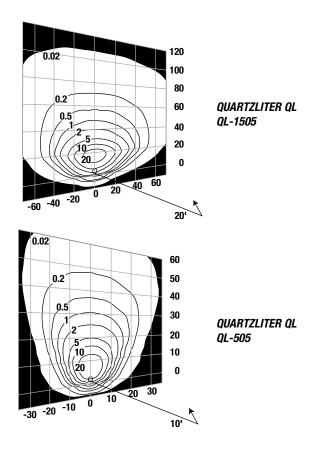

PHOTOMETRIC REPORTS

Catalog Number	Report #	
QL505	HP00930.IES	
01 1505	HPOOR54 IFS	