


Mounting Accessories

Accessories: Steel Bullhorns


Steel "bull horn" floodlight brackets. Fixture mounting pipe or tenons are 2³/₈" O.D. and brackets mount on 2³/₈" O.D. pole tenons. Stainless steel set screws and thru-bolts included. Finishes as shown below.

ORDERING INFORMATION


Catalog Number	Maximum Loading		Description	Finish	Weight lbs. (kg)	EPA ft ² (m ²)
	Fixture Qty.	Weight lbs (kg)				
THB-21	2	210 (95.3)	Two tenons at 180°	Bronze	17 (7.7)	.9 (0.1)
THB-21-M53	2	210 (95.3)	Two tenons at 180°	Gray	17 (7.7)	.9 (0.1)
THB-31	3	315 (142.9)	Three tenons at 180°	Bronze	30 (13.6)	1.5 (0.1)
THB-32	3	315 (142.9)	Three tenons at 120°	Bronze	23 (10.4)	1.2 (0.1)
THB-41	4	420 (190.5)	Four tenons at 180°	Bronze	43 (19.5)	2.2 (0.2)
THB-43	4	420 (190.5)	Four tenons at 90°	Bronze	29 (13.1)	1.3 (0.1)




THB-21

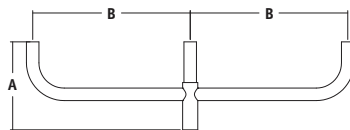


THB-31



THB-43

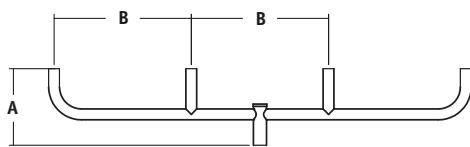

THB-41



THB-32


A	B	C	D
17"	30"	21.25"	26"
431 mm	762 mm	539 mm	660 mm

Accessories: Square Steel Brackets (Project finishes available)


Decorative steel floodlight brackets. 4" square tubing with 2³/₈" O.D. fixture tenons. Square 4" bottom with 2¹/₂" I.D. internal adapter for standard round tenons. Available in multiple finishes as shown. Use with SSS series poles.

Catalog Number	Description	Maximum Weight Per Tenon lbs. (kg)	EPA ft ² (m ²)	Weight lbs. (kg)
SSB-21-M51	Twin 180°	60 (27.2)	1.2 (0.1)	24 (10.9)
SSB-31-M51	Triple 180°	60 (27.2)	2.3 (0.2)	44 (19.9)
SSB-41-M51	Quad 180°	60 (27.2)	3.4 (0.3)	64 (29)
SSB-43-M51	Quad 90°	60 (27.2)	2.8 (0.3)	46 (20.8)

Note: Bronze color standard, for others, add suffix to catalog number: -M50 - Black finish; -M52 - White finish; -M53 - Gray finish.




SSB-21

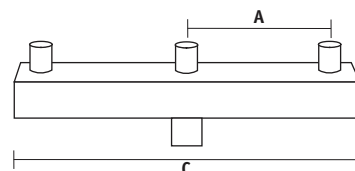


SSB-31

A	B	C	D	E
24"	30"	54"	78"	30"
610 mm	762 mm	1372 mm	1981 mm	762 mm

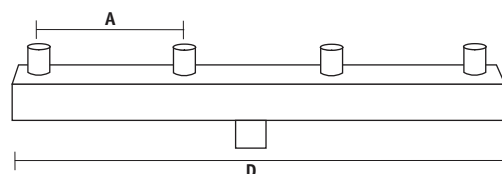

SSB-41

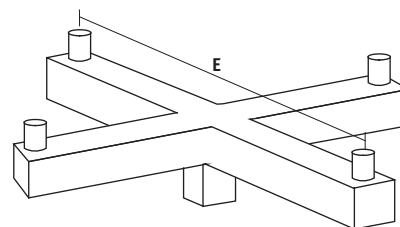

SSB-43



HUBBELL
Outdoor Lighting

ROADWAY DC RMCT

Solar LED Roadway

- The LED RM unit is used with Hubbell Lighting's solar lighting package; This DC unit is powered by the solar panel and battery that is custom designed for your location; Typical applications include roadway, parking, area and perimeter lighting
- Units are available in 35w, 50w, and 70w configurations; 12V DC input current
- Die-cast aluminum housing and doors provide light weight, yet durable protection, A driver door allows easy access for both mounting and wiring
- A 30LED light engine provides standard IES distributions of Type II, III, IV, V square with up to 86 LPW efficiency
- Each LED has individual optical lens so every source contributes to the same IES pattern
- IP-65 LED light engine assembly and driver(s)
- Lektrocote® finish with 2 standard and custom colors available
- Fixture feature a twin clamp mounting to either 2 3/8" OD or 1 5/8" OD pipe; A center fulcrum allows leveling of +or- 5 degrees by clamp adjustment
- A 'bird shield' is included on all fixtures; Fixtures are capable of 3G installations.
- IDA fixture seal of approval
- Suitable for use in wet locations



SOLAR

ORDERING INFORMATION (Must be ordered with Hubbell Lighting solar power assembly, see specification sheets for detailed information)

SERIES	NUMBER OF LEDS	VOLTAGE	CCT	IES DISTRIBUTION	DRIVE CURRENT	FINISH
RMCT Zero uplight medium solar Roadway	30L 30 LEDs	D 12V DC	4K 4200K nominal 5K 5100K nominal	2 Type II 3 Type III 4 Type IV 5 Type V	035 350 mA (35w) 052 525 mA (50w) 070 700 mA (71w)	M51 Bronze M53 Gray

DIMENSIONS

