

NRG® 300 Series

Perimeter Wallpack

LED WALLPACKS



- Full polycarbonate front provides vandal resistance and uniform light distribution; Internally painted bronze finish for lasting appearance
- 12LED unit provides long-life with low energy consumption, a perfect upgrade for older units
- Rugged cast aluminum back housing for rigid mounting; Bottom 1/2" conduit knockout for surface conduit wiring
- Bronze finish
- Units available with or without 120V button photocontrol, see ordering information
- Tamper resistant center pin Torx hardware included
- Listed to UL1598 for use in wet locations

STOCK

ORDERING INFORMATION

Catalog Number	Wattage	Delivered Lumens	Voltage	CCT	Mounting Height	Drivers/Current	Weight lbs. (kg)	PKG. CODE
NRG-312LU-5K-BZ	18w	1120	120-277V	5000K	Up to 10 ft.	1@350mA	6 (2.7)	FCC
NRG-312LU-5K-BZ-PC	18w	1120	120V	5000K	Up to 10 ft.	1@350mA	6 (2.7)	FCC

PERFORMANCE INFORMATION

Series Number	Equivalency			Energy Savings
	MH	HPS	CFL	
NRG-312LU	50w	50w	42w	73%

STOCK

ACCESSORIES - Order Separately


Catalog Number	Description	PKG. CODE
PBT-1	Button photocontrol, 120V	SCC
PBT-234	Button photocontrol, 208, 240, 277V	SCC

MADE-TO-ORDER

REPLACEMENT PART

Catalog Number	Description	PKG. CODE
SM352-COVER	Polycarbonate front cover, Bronze	BC

DIMENSIONS

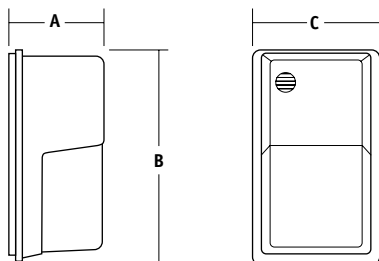

A	B	C
5.4"	11.0"	6.9"
137 mm	280 mm	175 mm



HUBBELL
Outdoor Lighting