

201 Series

Wrap Around Surface Mount Units



Application: This surface mounted wrap around unit is designed for use in most commercial, residential, and institutional type applications. The unit provides maximum light output with minimum clearance.

Construction: Housing is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity. Clear acrylic prismatic wrap around diffuser hinges from either side and snaps on and off for easy maintenance.


Electrical: All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standards.

Mounting: Unit is equipped with knockouts and holes for pendant or surface mounting. This fixture can be mounted individually or continuous run.



Coefficients Utilization Zonal Cavity Method



RF	20											
	80%				70%				50%			
RC	70	50	30	10	70	50	30	10	50	30	10	
RW	80	80	80	80	78	78	78	78	73	73	73	
0	80	80	80	80	78	78	78	78	73	73	73	
1	74	72	68	66	72	69	67	64	65	63	62	
2	68	63	59	55	66	61	58	54	58	55	53	
3	63	56	51	48	61	55	51	47	53	49	46	
4	58	51	45	41	56	49	44	41	47	43	40	
5	53	45	40	35	52	44	39	35	42	38	34	
6	49	41	35	31	48	40	35	31	38	34	30	
7	46	37	31	27	44	36	31	27	35	30	27	
8	42	33	28	24	41	33	27	24	31	27	23	
9	39	30	24	21	38	29	24	21	28	24	20	
10	36	27	22	18	35	27	22	18	26	21	18	



Fixture Length			Length
T12	T8	T5	
F20T12	F17T8	F14T5	24"
F40T12	F32T8	F28T5	48"
F96T12	F96T8	---	96"

For Tandem Units:
Multiply lamp length above by lamp quantity

Fixture	Bulb Spacing
2 Tube	5 3/8"
4 Tube	2 1/4" - 5 3/8" - 2 1/4"
2 Tube in 4 Tube Housing	7"

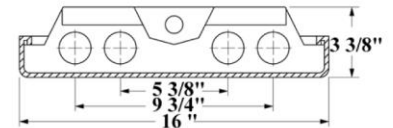

Maximum Weight= 16 lbs. / 48" 32 lbs. / 96"

Ordering Information

Specifications Subject To Change Without Notice

Model	# Lamps	Lamp Type	Ballast	Voltage	Options
201-	2	32	E		
201	2 = Two 3 = Three 4 = Four Double Row 22 = Four Tube Four Row 24 = Eight Tube	T5 lamps 14T5 = F14T5 28T5 = F28T5 T8 lamps 32 = F32T8 96T8 = F96T8 T12 lamps 20 = F20T12 40 = F40T12 T12 Lamps 48 = F48T12 96 = F96T12	M = Magnetic E = Electronic .88 BF E-LW = Electronic .77 BF E-O = Electronic 1.18 BF	Blank = 120V 277 = 277 V MV = Multi Volt	EMB = Emergency Ballast

K-B Lighting Mfg. Co., Inc. 2515 Metropolitan Drive / Treose, PA 19053
 (215) 953-6663 phone (215) 953-6710 fax kblight@erols.com email