



# KTEB-132-1-TP-FC

## T8 ELECTRONIC BALLAST



### DESCRIPTION

1 x F32T8 | 120V | NPF | Rapid Start | Finger Case

<b>STARTING METHOD:</b> Rapid
<b>INPUT VOLTAGE:</b> 120VAC ±10%
<b>INPUT FREQUENCY:</b> 50/60 Hz
<b>POWER FACTOR:</b> Normal
<b>WARRANTY:</b> 3 Years


### PRODUCT FEATURES

- Sound Rated: A
- Maximum Case Temperature: 167°F, 75°C
- Minimum Start Temperature: 0°F, -18°C
- Meets FCC Part 18 (Class B) Consumer Limits
- UL, cUL 935 Listed


### ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD (%)
F32T8 (32W)	1	120	28	0.40	0.57	1.5	0.89	3.18	160
F25T8	1	120	24	0.36	0.55	1.5	0.98	4.08	160
F17T8	1	120	17	0.28	0.52	1.5	1.00	5.88	160
F15T8	1	120	14	0.22	0.52	1.5	0.90	6.43	160
F14T8	1	120	13	0.21	0.51	1.5	0.91	7.00	160
F13T8	1	120	12	0.16	0.59	1.5	0.91	7.58	160
F013T8	1	120	12	0.16	0.59	1.5	0.91	7.58	160
F40T12	1	120	25	0.34	0.59	1.5	0.60	2.40	160
F34T12	1	120	24	0.34	0.58	1.5	0.70	2.91	160
F30T12	1	120	21	0.29	0.60	1.5	0.66	3.14	160
F20T12	1	120	18	0.24	0.62	1.5	0.90	5.00	160
F15T12	1	120	14	0.19	0.61	1.5	0.82	5.85	160

### WIRING DIAGRAMS

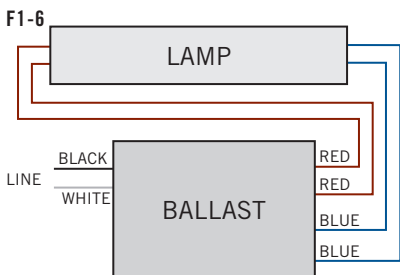

### HOT SPOT LOCATION

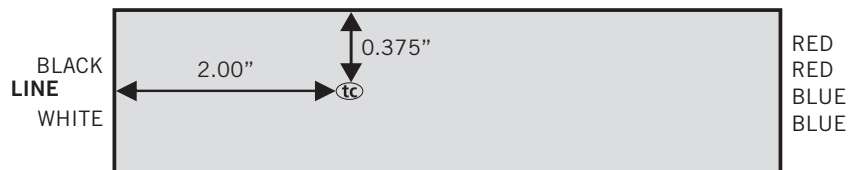




# KTEB-132-1-TP-FC

## T8 ELECTRONIC BALLAST

### MECHANICAL SPECIFICATIONS

#### CASE DIMENSIONS



<b>LENGTH</b>	5.90"
<b>WIDTH</b>	0.91"
<b>HEIGHT</b>	0.76"
<b>MOUNTING (M1, M2)</b>	5.60"
<b>CASE STYLE</b>	V1

#### STANDARD LEAD LENGTHS\*

<b>BLACK</b>	15"
<b>WHITE</b>	15"
<b>BLUE</b>	26"
<b>RED</b>	34"

\*Consult Keystone for special lead length requirements.

**CASE MATERIAL:** Metal

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-132-1-TP-FC-CP	Carton Pack	TBD	Active

### CATALOG NUMBER BREAKDOWN

# KTEB-132-1-TP-FC-CP

