


INCANDESCENT/LED 12V HYBRID DECK & PATIO

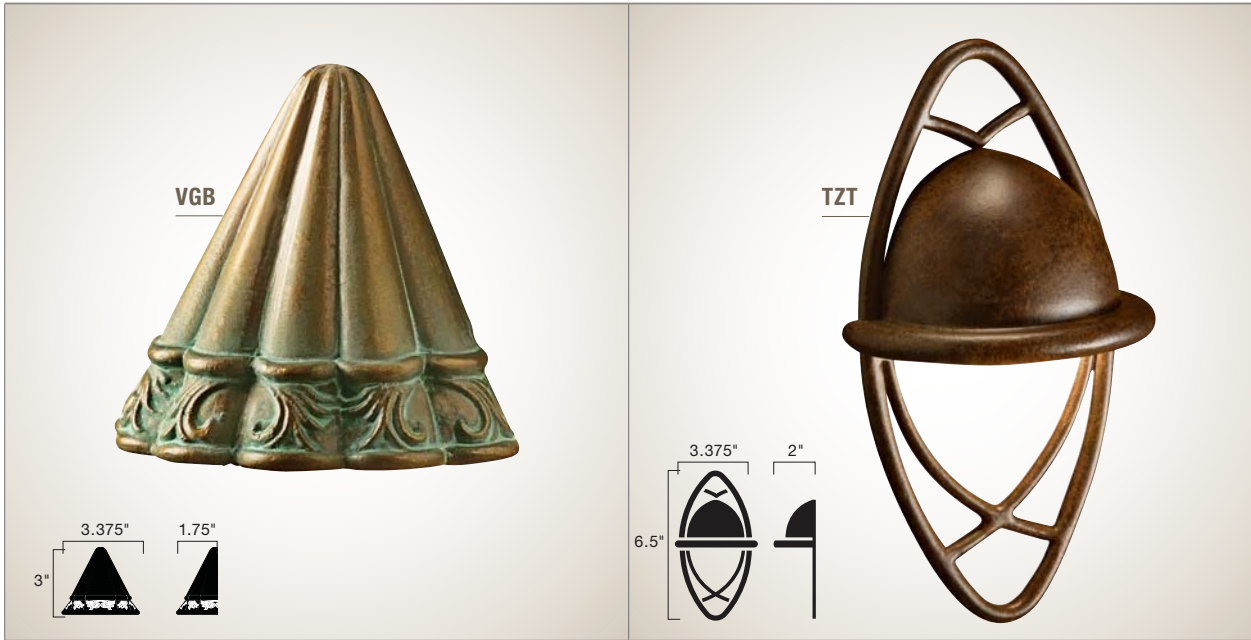

15021 VGB - AINSLEY SQUARE™ DECK LIGHT

15469 TZT - CATHEDRAL™ DECK LIGHT

Description	Charming detail in a decorative sconce with a Verdigris and Aged Brass finish.	Arches of interwoven bands dress the post as light flows down from the integral dome. Coordinates with matching Bollard 15449 TZT on page 77 and with matching Path light 15429 TZT on page 78.																																																																				
Ordering Guide & Finish	15021 VGB - Verdigris with Aged Brass	15469 TZT - Textured Tannery Bronze™																																																																				
Housing	Cast Brass	Aluminum																																																																				
Lamp Base	12V T5 wedge base socket	12V T5 wedge base socket																																																																				
Supplied Lamp	6.5-W(VA) 918X (17023) Xenon light source Power usage at 12V AC input VA MAX: 6.5-W(VA)	6.5-W(VA) 918X (17022) Xenon light source Power usage at 12V AC input VA MAX: 6.5-W(VA)																																																																				
Incandescent Lamp Options	4-W(VA) 901X (17021)	Optional: 4-W(VA) 901X (17021)																																																																				
LED Lamp Options	2W (18039-13041) see page 159 Compares up to 16W Xenon Light distribution may be affected by location of sockets	2W (18039-13041) see page 159 Compares up to 16W Xenon Light distribution may be affected by location of sockets																																																																				
Wiring	72" of usable #18-2, SPT-1-W leads. Cable connector supplied	72" of usable #18-2, SPT-1-W leads. Cable connector supplied																																																																				
Mounting Acces. Included	Stainless steel mounting bracket	Stainless steel mounting bracket																																																																				
Notes	U.S. Patent Pending	N/A																																																																				
Photometric with Supplied Lamp	<table border="1"> <thead> <tr> <th>Mounting Height</th> <th>0'</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> <th>6'</th> </tr> </thead> <tbody> <tr> <td>6"</td> <td>11.7</td> <td>4.65</td> <td>1.9</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>12"</td> <td>2.86</td> <td>2.16</td> <td>1.36</td> <td>.2</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>30"</td> <td>.26</td> <td>.3</td> <td>.16</td> <td>.2</td> <td>.1</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Mounting Height	0'	1'	2'	3'	4'	5'	6'	6"	11.7	4.65	1.9	-	-	-	-	12"	2.86	2.16	1.36	.2	-	-	-	30"	.26	.3	.16	.2	.1	-	-	<table border="1"> <thead> <tr> <th>Mounting Height</th> <th>.6'</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> <th>6'</th> <th>7'</th> </tr> </thead> <tbody> <tr> <td>6"</td> <td>37.3</td> <td>8.88</td> <td>1.39</td> <td>.34</td> <td>.10</td> <td>.03</td> <td>-</td> <td>-</td> </tr> <tr> <td>12"</td> <td>13.6</td> <td>6.17</td> <td>1.85</td> <td>.74</td> <td>.35</td> <td>.18</td> <td>-</td> <td>-</td> </tr> <tr> <td>30"</td> <td>2.39</td> <td>2.01</td> <td>1.29</td> <td>.79</td> <td>.47</td> <td>.30</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Mounting Height	.6'	1'	2'	3'	4'	5'	6'	7'	6"	37.3	8.88	1.39	.34	.10	.03	-	-	12"	13.6	6.17	1.85	.74	.35	.18	-	-	30"	2.39	2.01	1.29	.79	.47	.30	-	-
Mounting Height	0'	1'	2'	3'	4'	5'	6'																																																															
6"	11.7	4.65	1.9	-	-	-	-																																																															
12"	2.86	2.16	1.36	.2	-	-	-																																																															
30"	.26	.3	.16	.2	.1	-	-																																																															
Mounting Height	.6'	1'	2'	3'	4'	5'	6'	7'																																																														
6"	37.3	8.88	1.39	.34	.10	.03	-	-																																																														
12"	13.6	6.17	1.85	.74	.35	.18	-	-																																																														
30"	2.39	2.01	1.29	.79	.47	.30	-	-																																																														

Denotes fixture is compatible with incandescent or LED lamps.