



DECORATIVE  
HAMMERED  
ROOF

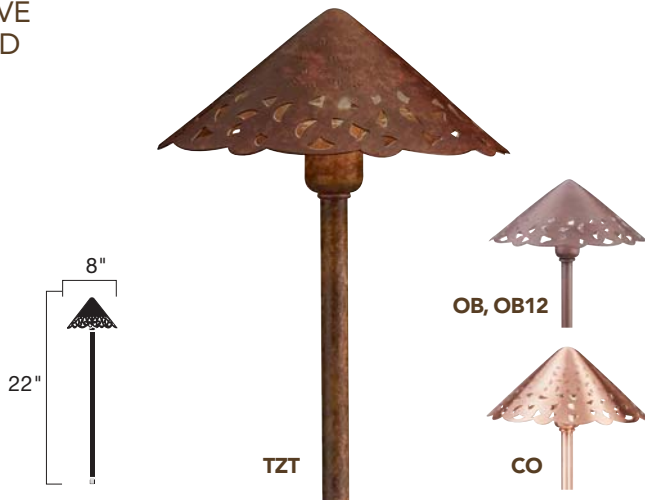

15443 CO, OB, OB12, TZT

CAST  
HAMMERED  
ROOF

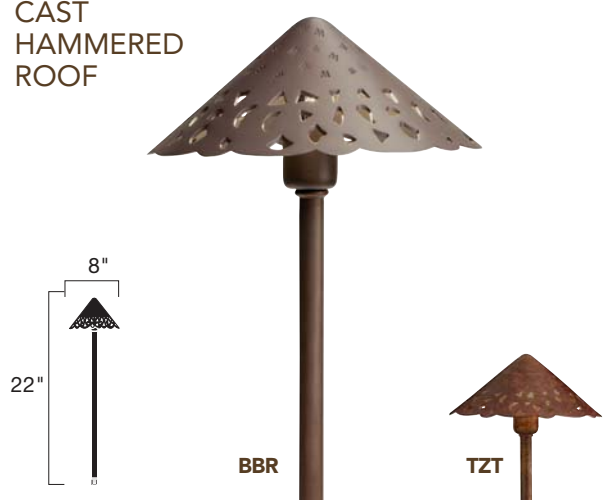

15471 BBR, TZT

Ordering Guide & Finish	15443 CO 15443 OB 15443 OB12 – Same as 15443OB. Bulk packed in 12 (unbreakable master) 15443 TZT	15471 BBR 15471 TZT																																								
Housing	Brass or Copper	Cast Aluminum, Cast Brass																																								
Lamp Base	12V S8 wedge base socket	12V S8 wedge base socket																																								
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)																																								
Incandescent Lamp Options	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599CLR)																																								
LED Lamp Options	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.																																								
Wiring	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																																								
Mounting Access. (Included)	8" In-ground slotted stake	8" In-ground slotted stake																																								
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket																																								
Integrated LED Options	15843 on page 34	15871 on page 34																																								
Notes	U.S. Patent No. D408,573. Brass or Copper will naturally patina over time.	Brass will develop natural patina over time																																								
Photometric with Supplied Lamp	<table border="1"> <tr> <td>Distance from Light</td> <td>1'</td> <td>2'</td> <td>3'</td> <td>4'</td> <td>5'</td> <td>6'</td> <td>7'</td> <td>8'</td> <td>9'</td> </tr> <tr> <td>Foot Candles</td> <td>8.9</td> <td>2.8</td> <td>.6</td> <td>.15</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table>	Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'	Foot Candles	8.9	2.8	.6	.15	-	-	-	-	-	<table border="1"> <tr> <td>Distance from Light</td> <td>1'</td> <td>2'</td> <td>3'</td> <td>4'</td> <td>5'</td> <td>6'</td> <td>7'</td> <td>8'</td> <td>9'</td> </tr> <tr> <td>Foot Candles</td> <td>8.9</td> <td>2.8</td> <td>.6</td> <td>.15</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </table>	Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'	Foot Candles	8.9	2.8	.6	.15	-	-	-	-	-
Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'																																	
Foot Candles	8.9	2.8	.6	.15	-	-	-	-	-																																	
Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	9'																																	
Foot Candles	8.9	2.8	.6	.15	-	-	-	-	-																																	