


Cushion-Grip Nut Drivers

Meets or exceeds applicable ASME / ANSI and MIL specifications

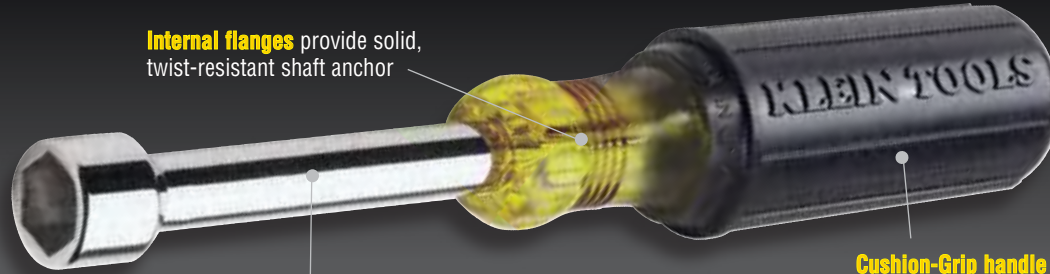

Internal flanges provide solid, twist-resistant shaft anchor

Premium chrome-plated shaft for smooth feel and corrosion resistance

Cushion-Grip handle for greater torque and comfort

Handle end is also color coded for easy identification



Tip-Ident® quickly identifies nut driver and size



Magnetic-Tip Hollow-Shaft Nut Drivers

Includes core Cushion-Grip Nut Driver features plus:

- Exclusive hollow shaft* design with Rare Earth magnetic tip features unobstructed pass-through, even on long bolts



630-3/8M

Cat. No.	Nut Driver Sizes	Shaft Length	Color Code	Overall Length	Weight
610-1/4M	1/4"	1-1/2" (38.1 mm)	Red	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
610-5/16M	5/16"	1-1/2" (38.1 mm)	Yellow	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
610-3/8M	3/8"	1-1/2" (38.1 mm)	Blue	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
630-3/16M	3/16"	3" (76.2 mm)	Black	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-1/4M	1/4"	3" (76.2 mm)	Red	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-5/16M	5/16"	3" (76.2 mm)	Yellow	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-11/32M	11/32"	3" (76.2 mm)	Green	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-3/8M	3/8"	3" (76.2 mm)	Blue	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-7/16M	7/16"	3" (76.2 mm)	Brown	7-5/16" (185.7 mm)	0.25 lb (0.11 kg)
630-1/2M	1/2"	3" (76.2 mm)	Red	7-5/16" (185.7 mm)	0.25 lb (0.11 kg)
646-3/16M	3/16"	6" (152.4 mm)	Black	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-1/4M	1/4"	6" (152.4 mm)	Red	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-5/16M	5/16"	6" (152.4 mm)	Yellow	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-11/32M	11/32"	6" (152.4 mm)	Green	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-3/8M	3/8"	6" (152.4 mm)	Blue	9-3/4" (247.7 mm)	0.30 lb (0.14 kg)
646-7/16M	7/16"	6" (152.4 mm)	Brown	10-5/16" (261.9 mm)	0.35 lb (0.16 kg)
646-1/2M	1/2"	6" (152.4 mm)	Red	10-5/16" (261.9 mm)	0.35 lb (0.16 kg)
618-1/4M	1/4"	18" (457.2 mm)	Red	21-3/4" (552.5 mm)	0.50 lb (0.23 kg)
618-5/16M	5/16"	18" (457.2 mm)	Yellow	21-3/4" (552.5 mm)	0.50 lb (0.23 kg)

*3/16" magnetic nut driver does not have a hollow shaft.

Cat. No.	Set Contains	Weight
631M	Magnetic Nut Driver Set 3" Shaft, 7 Pc	1.5 lb (0.7 kg)

Cat. No.	Description
630-3/16M	3/16" Magnetic Tip Nut Driver 3" Shaft
630-1/4M	1/4" Magnetic Tip Nut Driver 3" Shaft
630-5/16M	5/16" Nut Driver with Hollow Shaft
630-11/32M	11/32" Magnetic Tip Nut Driver 3" Shaft
630-3/8M	3/8" Magnetic Tip Nut Driver 3" Shaft
630-7/16M	7/16" Magnetic Tip Nut Driver 3" Shaft
630-1/2M	1/2" Magnetic Tip Nut Driver 3" Shaft

Cat. No.	Set Contains	Weight
647M	Magnetic Nut Driver Set 6" Shafts, 7 Pc	1.5 lb (0.7 kg)

Cat. No.	Description
646-3/16M	3/16" Magnetic Tip Nut Driver 6" Shaft
646-1/4M	1/4" Magnetic Tip Nut Driver 6" Shaft
646-5/16M	5/16" Magnetic Nut Driver Cushion-Grip
646-11/32M	11/32" Magnetic Tip Nut Driver 6" Shaft
646-3/8M	3/8" Magnetic Tip Nut Driver 6" Shaft
646-7/16M	7/16" Magnetic Tip Nut Driver 6" Shaft
646-1/2M	1/2" Magnetic Tip Nut Driver 6" Shaft

Cat. No.	Set Contains	Weight
630M	Magnetic Nut Driver Set 3" Shank 2 Pc	0.40 lb (0.18 kg)

Cat. No.	Description
630-1/4M	1/4" Magnetic Tip Nut Driver 3" Shaft
630-5/16M	5/16" Nut Driver with Hollow Shaft

Cat. No.	Set Contains	Weight
646M	Nut Driver Set 6" Shafts, Magnetic 2 Pc	0.50 lb (0.23 kg)

Cat. No.	Description
646-1/4M	1/4" Magnetic Tip Nut Driver 6" Shaft
646-5/16M	5/16" Magnetic Nut Driver Cushion-Grip

Cat. No.	Set Contains	Weight
610M	Stubby Nut Driver Set 1-1/2" Shafts Magnetic 2 Pc	0.20 lb (0.09 kg)

Cat. No.	Description
610-1/4M	Magnetic Nut Driver 1-1/2" Hollow Shaft
610-5/16M	5/16" Magnetic Nut Driver 1-1/2" Shaft

