


Cushion-Grip Nut Drivers

Meets or exceeds applicable ASME / ANSI and MIL specifications

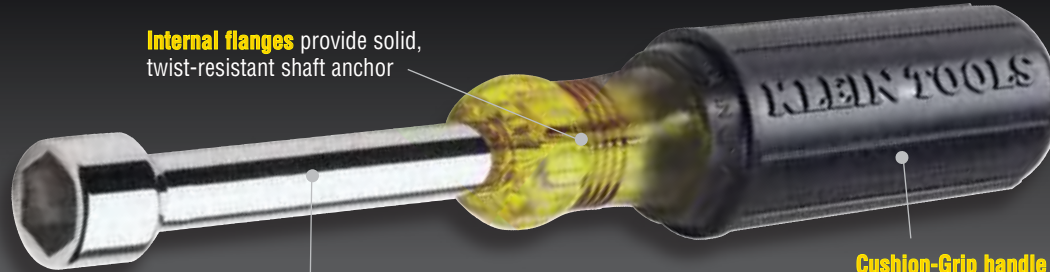

Internal flanges provide solid, twist-resistant shaft anchor

Premium chrome-plated shaft for smooth feel and corrosion resistance

Cushion-Grip handle for greater torque and comfort

Handle end is also color coded for easy identification



Tip-Ident® quickly identifies nut driver and size



Magnetic-Tip Hollow-Shaft Nut Drivers

Includes core Cushion-Grip Nut Driver features plus:

- Exclusive hollow shaft* design with Rare Earth magnetic tip features unobstructed pass-through, even on long bolts



630-3/8M

Cat. No.	Nut Driver Sizes	Shaft Length	Color Code	Overall Length	Weight
610-1/4M	1/4"	1-1/2" (38.1 mm)	Red	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
610-5/16M	5/16"	1-1/2" (38.1 mm)	Yellow	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
610-3/8M	3/8"	1-1/2" (38.1 mm)	Blue	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
630-3/16M	3/16"	3" (76.2 mm)	Black	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-1/4M	1/4"	3" (76.2 mm)	Red	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-5/16M	5/16"	3" (76.2 mm)	Yellow	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-11/32M	11/32"	3" (76.2 mm)	Green	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-3/8M	3/8"	3" (76.2 mm)	Blue	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-7/16M	7/16"	3" (76.2 mm)	Brown	7-5/16" (185.7 mm)	0.25 lb (0.11 kg)
630-1/2M	1/2"	3" (76.2 mm)	Red	7-5/16" (185.7 mm)	0.25 lb (0.11 kg)
646-3/16M	3/16"	6" (152.4 mm)	Black	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-1/4M	1/4"	6" (152.4 mm)	Red	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-5/16M	5/16"	6" (152.4 mm)	Yellow	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-11/32M	11/32"	6" (152.4 mm)	Green	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-3/8M	3/8"	6" (152.4 mm)	Blue	9-3/4" (247.7 mm)	0.30 lb (0.14 kg)
646-7/16M	7/16"	6" (152.4 mm)	Brown	10-5/16" (261.9 mm)	0.35 lb (0.16 kg)
646-1/2M	1/2"	6" (152.4 mm)	Red	10-5/16" (261.9 mm)	0.35 lb (0.16 kg)
618-1/4M	1/4"	18" (457.2 mm)	Red	21-3/4" (552.5 mm)	0.50 lb (0.23 kg)
618-5/16M	5/16"	18" (457.2 mm)	Yellow	21-3/4" (552.5 mm)	0.50 lb (0.23 kg)

*3/16" magnetic nut driver does not have a hollow shaft.

Cat. No.	Set Contains	Weight
631M	Magnetic Nut Driver Set 3" Shaft, 7 Pc	1.5 lb (0.7 kg)

Cat. No.	Description
630-3/16M	3/16" Magnetic Tip Nut Driver 3" Shaft
630-1/4M	1/4" Magnetic Tip Nut Driver 3" Shaft
630-5/16M	5/16" Nut Driver with Hollow Shaft
630-11/32M	11/32" Magnetic Nut Driver 3" Shaft
630-3/8M	3/8" Magnetic Tip Nut Driver 3" Shaft
630-7/16M	7/16" Magnetic Tip Nut Driver 3" Shaft
630-1/2M	1/2" Magnetic Tip Nut Driver 3" Shaft

Cat. No.	Set Contains	Weight
647M	Magnetic Nut Driver Set 6" Shafts, 7 Pc	1.5 lb (0.7 kg)

Cat. No.	Description
646-3/16M	3/16" Magnetic Tip Nut Driver 6" Shaft
646-1/4M	1/4" Magnetic Tip Nut Driver 6" Shaft
646-5/16M	5/16" Magnetic Nut Driver Cushion-Grip
646-11/32M	11/32" Magnetic Nut Driver 6" Shaft
646-3/8M	3/8" Magnetic Tip Nut Driver 6" Shaft
646-7/16M	7/16" Magnetic Tip Nut Driver 6" Shaft
646-1/2M	1/2" Magnetic Tip Nut Driver 6" Shaft

Cat. No.	Set Contains	Weight
630M	Magnetic Nut Driver Set 3" Shank 2 Pc	0.40 lb (0.18 kg)

Cat. No.	Description
630-1/4M	1/4" Magnetic Tip Nut Driver 3" Shaft
630-5/16M	5/16" Nut Driver with Hollow Shaft

Cat. No.	Set Contains	Weight
646M	Nut Driver Set 6" Shafts, Magnetic 2 Pc	0.50 lb (0.23 kg)

Cat. No.	Description
646-1/4M	1/4" Magnetic Tip Nut Driver 6" Shaft
646-5/16M	5/16" Magnetic Nut Driver Cushion-Grip

Cat. No.	Set Contains	Weight
610M	Stubby Nut Driver Set 1-1/2" Shafts Magnetic 2 Pc	0.20 lb (0.09 kg)

Cat. No.	Description
610-1/4M	Magnetic Nut Driver 1-1/2" Hollow Shaft
610-5/16M	5/16" Magnetic Nut Driver 1-1/2" Shaft



Cushion-Grip Nut Drivers

Hollow Shaft Nut Drivers

Includes core Cushion-Grip Nut Driver features plus:

- 3" (76 mm) length for most long bolt and stud applications
- 6" (152 mm) length reaches into deep recesses and fits over extra-long bolts and studs

Refer to the insulated section for insulated nut drivers.



Cat. No.	Nut Driver Sizes	Shaft Length	Color Code	Overall Length	Weight
610-1/4	1/4"	1-1/2" (38.1 mm)	Red	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
610-5/16	5/16"	1-1/2" (38.1 mm)	Yellow	3-1/2" (88.9 mm)	0.10 lb (0.05 kg)
630-3/16	3/16"	3" (76.2 mm)	Black	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-1/4	1/4"	3" (76.2 mm)	Red	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-5/16	5/16"	3" (76.2 mm)	Yellow	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-11/32	11/32"	3" (76.2 mm)	Green	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-3/8	3/8"	3" (76.2 mm)	Blue	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-7/16	7/16"	3" (76.2 mm)	Brown	7-5/16 (185.7 mm)	0.25 lb (0.11 kg)
630-1/2	1/2"	3" (76.2 mm)	Red	7-5/16 (185.7 mm)	0.25 lb (0.11 kg)
630-9/16	9/16"	4" (101.6 mm)	Orange	9-3/8" (238.1 mm)	0.35 lb (0.16 kg)
630-5/8	5/8"	4" (101.6 mm)	Yellow	9-3/8" (238.1 mm)	0.35 lb (0.16 kg)
646-3/16	3/16"	6" (152.4 mm)	Black	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-1/4	1/4"	6" (152.4 mm)	Red	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-5/16	5/16"	6" (152.4 mm)	Yellow	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-11/32	11/32"	6" (152.4 mm)	Green	9-3/4" (247.7 mm)	0.25 lb (0.11 kg)
646-3/8	3/8"	6" (152.4 mm)	Blue	9-3/4" (247.7 mm)	0.30 lb (0.14 kg)
646-7/16	7/16"	6" (152.4 mm)	Brown	10-5/16" (261.9 mm)	0.35 lb (0.16 kg)
646-1/2	1/2"	6" (152.4 mm)	Red	10-5/16" (261.9 mm)	0.35 lb (0.16 kg)
646-9/16	9/16"	6" (152.4 mm)	Orange	11-3/8" (288.9 mm)	0.40 lb (0.18 kg)
646-5/8	5/8"	6" (152.4 mm)	Yellow	11-3/8" (288.9 mm)	0.40 lb (0.18 kg)
Metric					
630-4MM	4 mm	3" (76.2 mm)	Red	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-4.5MM	4.5 mm	3" (76.2 mm)	Yellow	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-5MM	5 mm	3" (76.2 mm)	Black	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-6MM	6 mm	3" (76.2 mm)	Red	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-7MM	7 mm	3" (76.2 mm)	Orange	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-8MM	8 mm	3" (76.2 mm)	Yellow	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-10MM	10 mm	3" (76.2 mm)	Blue	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)
630-11MM	11 mm	3" (76.2 mm)	Brown	7-5/16 (185.7 mm)	0.20 lb (0.09 kg)



630-11MM

Cat. No.	Set Contains	Weight
631	Nut Driver Set 3" Shafts, 7 Pc	1.5 lb (0.7 kg)

Cat. No. Description

630-3/16	3/16" Hollow Shaft Nut Driver 3" Shaft
630-1/4	1/4" Nut Driver 3" Shaft Cushioned
630-5/16	5/16" Nut Driver Cushion-Grip 3" Shaft
630-11/32	11/32" Nut Driver 3" Hollow Shaft
630-3/8	3/8" Hollow Shaft Nut Driver 3" Shaft
630-7/16	7/16" Hollow Nut Driver 3" Cushioned
630-1/2	1/2" Nut Driver 3" Shaft Cushion-Grip

Cat. No.	Set Contains	Weight
647	Nut Driver Set 6" Shafts, 7 Pc	1.7 lb (0.8 kg)

Cat. No. Description

646-3/16	3/16" Nut Driver 6" Shaft
646-1/4	1/4" Hollow Shaft Nut Driver 6" Shaft
646-5/16	5/16" Hollow Shaft Nut Driver 6" Shaft
646-11/32	11/32" Nut Driver 6" Hollow Shaft
646-3/8	3/8" Hollow Shaft Nut Driver 6" Shaft
646-7/16	7/16" Nut Driver 6" Hollow Shaft
646-1/2	1/2" Nut Driver 6" Hollow Shaft

Cat. No.	Set Contains	Weight
65160	7 Piece Metric Nut Driver Set 3" Shafts	1.5 lb (0.7 kg)

Cat. No. Description

630-5MM	5 mm Cushion Grip Nut Driver 3" Shaft
630-55MM	5.5 mm Cushion-Grip Hollow-Shank Nut Driver
630-6MM	6 mm Cushion-Grip Nut Driver, 3" Hollow Shaft
630-7MM	7 mm Cushion Grip Nut Driver 3" Shaft
630-8MM	8 mm Cushion-Grip Nut Driver, 3" Hollow Shaft
630-9MM	9 mm Cushion-Grip Nut Driver, 3" Hollow Shaft
630-10MM	10 mm Cushion Grip Nut Driver 3" Shaft

Cat. No.	Set Contains	Weight
633	Nut Driver Set, 4 Pc	1.3 lb (0.6 kg)

Cat. No. Description

630-1/4	1/4" Nut Driver 3" Shaft Cushioned
630-5/16	5/16" Nut Driver Cushion-Grip 3" Shaft
630-3/8	3/8" Hollow Shaft Nut Driver 3" Shaft
630-9/16	9/16" Hollow Shaft Nut Driver 4" Shaft

Cat. No.	Set Contains	Weight
610	Stubby Nut Driver Set 1-1/2" Shafts 2 Pc	0.20 lb (0.09 kg)

Cat. No. Description

610-1/4	1/4" Stubby Nut Driver 1-1/2" Shaft
610-5/16	5/16" Stubby Nut Driver Cushion Grip



Tool Kits

41-Piece Journeyman™ Tool Kit



80141

Cat. No.	Kit Contains	Weight
80141	41 Piece Journeyman Tool Set	29.8 lb (13.5 kg)

Cat. No.	Description
BLK12	L Style Ball End Hex Key Caddy Set 12 Pc
J203-6	Long Nose Side Cutting Pliers 6-3/4" L
J203-8N	8" Journeyman™ Long Nose Pliers Side Cutting
J502-10	Journeyman™ Pump Pliers, 10"
D507-8	Adjustable Wrench Extra Capacity 8-1/4"
D507-12	12" Adjustable Wrench Extra Capacity
600-1	5/16" Cabinet Tip Screwdriver 1-1/2"
600-4	1/4" Screwdriver HD Square Shank
601-3	3/16" Cabinet Tip Screwdriver 3"
601-6	3/16" Cabinet Tip Screwdriver 6"
602-6	5/16" Keystone Tip Screwdriver 6" L
603-1	#2 Stubby Phillips Screwdriver 1-1/2"
603-3	#1 Phillips Screwdriver 3" Round Shank
603-4B	#2 Wire Bending Phillips Screwdriver
605-6	1/4" Cabinet Tip Screwdriver Heavy Duty 6"
630-3/16	3/16" Hollow Shaft Nut Driver 3" Shaft
630-1/4	1/4" Nut Driver 3" Shaft Cushioned
630-5/16	5/16" Nut Driver Cushion-Grip 3" Shaft
630-11/32	11/32" Nut Driver 3" Hollow Shaft
630-3/8	3/8" Hollow Shaft Nut Driver 3" Shaft
630-7/16	7/16" Hollow Nut Driver 3" Cushioned
630-1/2	1/2" Nut Driver 3" Shaft Cushion-Grip
650	Cushion-Grip Scratch Awl
662	#2 Square Screwdriver 4" Round Shank
670-6	3/16" Cabinet Rapi-Driv® Screwdriver
86225	25' Double Hook Magnetic Tape Measure
935R	Aluminum Torpedo Level Rare Earth Magnet
J1005	Journeyman™ Crimping/Cutting Tool
K1412	Klein-Kurve® Dual NM Cable Stripper/Cutter
J2000-9NETP	9" Journeyman™ Wire Pulling Pliers Heavy Duty Side Cutting
J2000-48	Diagonal HD Cutting Pliers Angled Head
5003-18	18" Canvas Tool Bag with Leather Bottom
5139	Canvas Zipper Bag
11055	Wire Stripper/Cutter
44133	Klein-Kurve® Retractable Utility Knife
46037	Cable Splicer's Kit
56003	1/8" Wide Steel Fish Tape 125 ft
58889	Padded Adjustable Shoulder Strap
60053	Protective Eyewear Clear Lens
J63050	Journeyman™ High Leverage Cable Cutter
85191	Conduit-Fitting and Reaming Screwdriver

⚠WARNING: Blades are intended for cutting only, and should be handled and disposed of with care. Bending the blade can cause it to break, possibly resulting in bodily injury. Check local laws on legality of selling or possessing these knives.

⚠WARNING: Do NOT open the tape measure case. Spring motor is under tension, and opening may cause injury.

⚠WARNING: Never remove screws while fish tape is coiled inside reel.





Tool Kits

28-Piece Electrician Tool Kit



Cat. No.	Kit Contains	Weight
80028	28 Piece Electrician Tool Set	17.2 lb (7.8 kg)

Cat. No.	Description
D203-8	8" Long Nose Pliers Side-Cutting
D213-9NETP	9" Side Cutting and Tape Pulling Pliers
85191	Conduit-Fitting and Reaming Screwdriver
D248-8	Diagonal Cutting Pliers High Leverage
D502-10	10" (254 mm) Pump Pliers
506-10	10" Adjustable Wrench Standard Capacity
600-4	1/4" Screwdriver HD Square Shank
601-6	3/16" Cabinet Tip Screwdriver 6"
602-6	5/16" Keystone Tip Screwdriver 6" L
603-4B	#2 Wire Bending Phillips Screwdriver
605-6	1/4" Cabinet Tip Screwdriver Heavy Duty 6"
630-3/16	3/16" Hollow Shaft Nut Driver 3" Shaft
630-1/4	1/4" Nut Driver 3" Shaft Cushioned
630-5/16	5/16" Nut Driver Cushion-Grip 3" Shaft
630-11/32	11/32" Nut Driver 3" Hollow Shaft
630-3/8	3/8" Hollow Shaft Nut Driver 3" Shaft
630-7/16	7/16" Hollow Nut Driver 3" Cushioned
630-1/2	1/2" Nut Driver 3" Shaft Cushion-Grip
662	#2 Square Screwdriver 4" Round Shank
670-6	3/16" Cabinet Rapi-Drive® Screwdriver
86125	25 Foot Non-Magnetic Tape Measure
935	Torpedo Level
1005	Crimping and Cutting Tool for Connectors
5102-16	16" Canvas Tool Bag
5139	Canvas Zipper Bag
11045	Wire Stripper/Cutter (10-18 AWG Solid)
44100	Utility Knife Retractable Blade
60053	Protective Eyewear Clear Lens

⚠️WARNING: Blades are intended for cutting only, and should be handled and disposed of with care. Bending the blade can cause it to break, possibly resulting in bodily injury. Check local laws on legality of selling or possessing these knives.

⚠️WARNING: Do NOT open the tape measure case. Spring motor is under tension, and opening may cause injury.

