


Plastic-Handle Nut Drivers

Meets or exceeds applicable ASME / ANSI and MIL specifications.

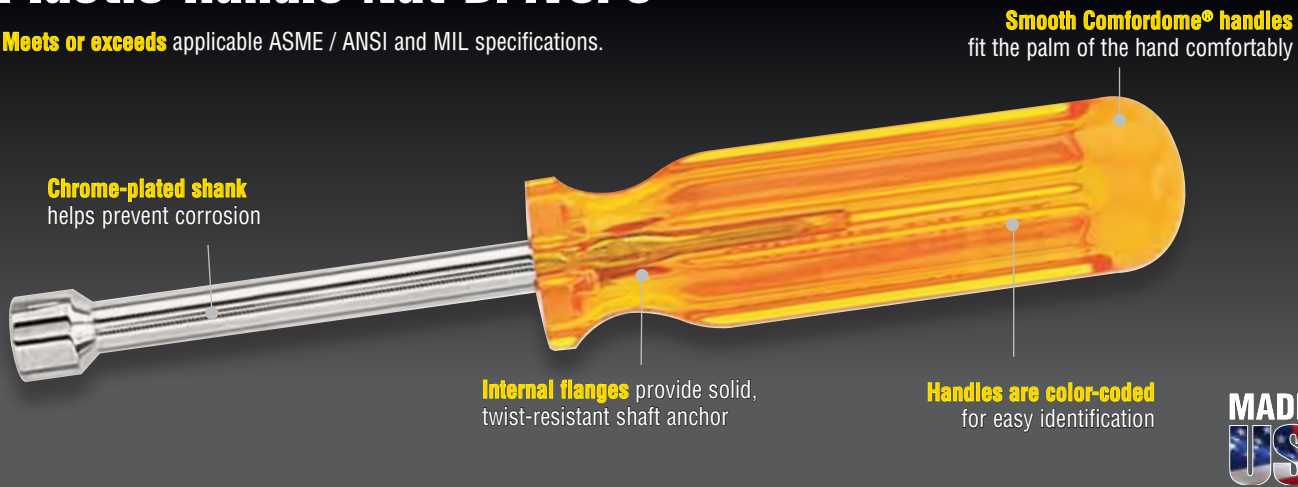

Hollow-Shaft Nut Drivers

Includes core Plastic-Handle Nut Driver features plus:

- Standard length works for most applications
- Fits over long bolts and studs
- Cat. Nos. SS8, SS10 and SS12 have smaller shaft length for work in tight spaces



S11

Cat. No.	Nut Driver Sizes	Shaft Length	Handle Color	Overall Length	Weight
SS8	1/4"	1-1/2" (38.1 mm)	Red	3-3/4" (95.3 mm)	0.15 lb (0.07 kg)
SS10	5/16"	1-1/2" (38.1 mm)	Amber	3-3/4" (95.3 mm)	0.15 lb (0.07 kg)
SS12	3/8"	1-1/2" (38.1 mm)	Blue	3-3/4" (95.3 mm)	0.15 lb (0.07 kg)
S5	5/32"	3" (76.2 mm)	Amber	6-1/2" (165.1 mm)	0.10 lb (0.05 kg)
S6	3/16"	3" (76.2 mm)	Black	6-5/8" (168.3 mm)	0.10 lb (0.05 kg)
S7	7/32"	3" (76.2 mm)	Brown	6-5/8" (168.3 mm)	0.10 lb (0.05 kg)
S8	1/4"	3" (76.2 mm)	Red	6-5/8" (168.3 mm)	0.15 lb (0.07 kg)
S9	9/32"	3" (76.2 mm)	Orange	6-5/8" (168.3 mm)	0.15 lb (0.07 kg)
S10	5/16"	3" (76.2 mm)	Amber	6-5/8" (168.3 mm)	0.15 lb (0.07 kg)
S11	11/32"	3" (76.2 mm)	Green	6-5/8" (168.3 mm)	0.15 lb (0.07 kg)
S12	3/8"	3" (76.2 mm)	Blue	6-5/8" (168.3 mm)	0.15 lb (0.07 kg)
S14	7/16"	3" (76.2 mm)	Brown	7" (177.8 mm)	0.20 lb (0.09 kg)
S16	1/2"	3" (76.2 mm)	Red	7" (177.8 mm)	0.20 lb (0.09 kg)
S18	9/16"	4" (101.6 mm)	Red	8-1/2" (215.9 mm)	0.30 lb (0.14 kg)
S20	5/8"	4" (101.6 mm)	Red	8-1/2" (215.9 mm)	0.30 lb (0.14 kg)
S66	3/16"	6" (152.4 mm)	Black	9-5/8" (244.5 mm)	0.15 lb (0.07 kg)
S86	1/4"	6" (152.4 mm)	Red	9-5/8" (244.5 mm)	0.15 lb (0.07 kg)
S106	5/16"	6" (152.4 mm)	Amber	9-5/8" (244.5 mm)	0.15 lb (0.07 kg)
S116	11/32"	6" (152.4 mm)	Green	9-5/8" (244.5 mm)	0.15 lb (0.07 kg)
S126	3/8"	6" (152.4 mm)	Blue	9-5/8" (244.5 mm)	0.15 lb (0.07 kg)
S146	7/16"	6" (152.4 mm)	Brown	10" (254.0 mm)	0.20 lb (0.09 kg)
S166	1/2"	6" (152.4 mm)	Red	10" (254.0 mm)	0.20 lb (0.09 kg)

Cat. No.	Set Contains	Weight
K7	Nut Driver Set 3" Shanks, 7 Pc	1.2 lb (0.5 kg)

Cat. No.	Description
S6	3/16" Hollow Shank Nut Driver 3" Shank
S8	1/4" Hollow Shank Nut Driver 3" Shank
S10	5/16" Nut Driver 3" Hollow Shaft
S11	11/32" Nut Driver, Plastic Grip 3" L
S12	3/8" Hollow Shaft Nut Driver 3" Shaft
S14	7/16" Hollow Shank Nut Driver 3" Shank
S16	1/2" Nut Driver 3" Hollow Shank

Cat. No.	Set Contains	Weight
89904	7 Piece Nut Driver Set 6" Shanks	1.2 lb (0.5 kg)

Cat. No.	Description
S66	3/16" Individual Nut Driver 6" Shank
S86	1/4" Individual Nut Driver 6" Shank
S106	5/16" Individual Nut Driver 6" Shaft
S116	11/32" Individual Nut Driver 6" Shaft
S126	3/8" Individual Nut Driver 6" Shaft
S146	7/16" Individual Nut Driver 6" Shank
S166	1/2" Individual Nut Driver 6" Shank

Set Cat. No. K7 includes a vinyl pouch which hangs up or rolls up





Scratch Awls

Cushion-Grip Scratch Awl

- Professional, heavy-duty, hard-pointed awl
- Scribes metal, starts screw holes, performs a variety of piercing and punching jobs
- Rigid, chrome-plated, heat-treated, tempered-steel shank has full reinforcing bolster at handle for extra strength and impact reinforcement
- Cat. No. 650DD has plated metal strike cap to protect handle from hammer blows and is engineered, manufactured and tested for prying, chiseling and punching



Cat. No.
650 only



650DD

Cat. No.	Shank Length	Overall Length	Weight
650	3-1/2" (88.9 mm)	7-7/8" (200.0 mm)	0.25 lb (0.11 kg)
650DD	3-1/2" (88.9 mm)	7-7/8" (200.0 mm)	0.30 lb (0.14 kg)

Steel Scratch Awl

- One-piece forged-steel blade and bolstered shank
- Heat-treated for long life
- Well-balanced for maximum efficiency during use
- Black finish for rust resistance



66385

Cat. No.	Overall Length	Shank Length	Weight
66385	7" (177.8 mm)	3-1/2" (88.9 mm)	0.30 lb (0.14 kg)

Conduit Reamers


Conduit-Fitting and Reaming Screwdriver

- Hooded-blade design keeps tip from slipping out of screws, especially when tightening hard-to-reach conduit fittings. Thicker hood is designed for rugged use
- Reams both the inside and outside of the conduit at the same time
- 5/16" (8 mm) screwdriver tip with 2-1/2" (64 mm) long shank
- Longer Cushion-Grip handle provides comfort and more torque for reaming
- Replaceable reaming blade is now held in place with a 1/6" (1.5 mm) set screw



85191

Cat. No.	Conduit Size	Overall Length	Weight
85191	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	7-1/2" (190.5 mm)	0.50 lb (0.23 kg)



19353
CONDUIT REAMER
REPLACEMENT BLADE, 2pk

Conduit Reamer

- Locks onto screwdrivers; reams and smooths thin-wall conduit
- Reams ID and OD at the same time
- Two set-screws for round- and square-shank screwdrivers
- Fits up to 3/8" (10 mm) keystone-tip screwdrivers
- NOT for use on power tools



19352

Cat. No.	Conduit Size	Overall Length	Weight
19352	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	6-3/4" (171.5 mm)	0.20 lb (0.09 kg)



19353
CONDUIT REAMER
REPLACEMENT BLADE, 2pk

Power Conduit Reamer

IMPACT RATED!

- Ream conduit and install fittings in a fraction of the time
- Designed to fit into power drill chucks and quick release adapters; impact ready
- Includes precision engineered replaceable reaming blade
- Replacement blades are available and the only approved blade for use in this tool
- Replacement bits are available but any standard 1/4" hex bit will work

Precision engineered
replaceable reaming blade

1/4" hex
quick connect




85091

4x Stronger
Bit Retention



NOTE: Read and follow safety instructions in power tool owner's manual.

Cat. No.	Conduit Size	Overall Length	Weight
85091	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	5-3/4" (146.1 mm)	0.33 lb (0.15 kg)



19353
CONDUIT REAMER
REPLACEMENT BLADE, 2pk

See page 295 for additional information on warnings.



Tool Kits

41-Piece Journeyman™ Tool Kit



80141

Cat. No.	Kit Contains	Weight
80141	41 Piece Journeyman Tool Set	29.8 lb (13.5 kg)

Cat. No.	Description
BLK12	L Style Ball End Hex Key Caddy Set 12 Pc
J203-6	Long Nose Side Cutting Pliers 6-3/4" L
J203-8N	8" Journeyman™ Long Nose Pliers Side Cutting
J502-10	Journeyman™ Pump Pliers, 10"
D507-8	Adjustable Wrench Extra Capacity 8-1/4"
D507-12	12" Adjustable Wrench Extra Capacity
600-1	5/16" Cabinet Tip Screwdriver 1-1/2"
600-4	1/4" Screwdriver HD Square Shank
601-3	3/16" Cabinet Tip Screwdriver 3"
601-6	3/16" Cabinet Tip Screwdriver 6"
602-6	5/16" Keystone Tip Screwdriver 6" L
603-1	#2 Stubby Phillips Screwdriver 1-1/2"
603-3	#1 Phillips Screwdriver 3" Round Shank
603-4B	#2 Wire Bending Phillips Screwdriver
605-6	1/4" Cabinet Tip Screwdriver Heavy Duty 6"
630-3/16	3/16" Hollow Shaft Nut Driver 3" Shaft
630-1/4	1/4" Nut Driver 3" Shaft Cushioned
630-5/16	5/16" Nut Driver Cushion-Grip 3" Shaft
630-11/32	11/32" Nut Driver 3" Hollow Shaft
630-3/8	3/8" Hollow Shaft Nut Driver 3" Shaft
630-7/16	7/16" Hollow Nut Driver 3" Cushioned
630-1/2	1/2" Nut Driver 3" Shaft Cushion-Grip
650	Cushion-Grip Scratch Awl
662	#2 Square Screwdriver 4" Round Shank
670-6	3/16" Cabinet Rapi-Driv® Screwdriver
86225	25' Double Hook Magnetic Tape Measure
935R	Aluminum Torpedo Level Rare Earth Magnet
J1005	Journeyman™ Crimping/Cutting Tool
K1412	Klein-Kurve® Dual NM Cable Stripper/Cutter
J2000-9NETP	9" Journeyman™ Wire Pulling Pliers Heavy Duty Side Cutting
J2000-48	Diagonal HD Cutting Pliers Angled Head
5003-18	18" Canvas Tool Bag with Leather Bottom
5139	Canvas Zipper Bag
11055	Wire Stripper/Cutter
44133	Klein-Kurve® Retractable Utility Knife
46037	Cable Splicer's Kit
56003	1/8" Wide Steel Fish Tape 125 ft
58889	Padded Adjustable Shoulder Strap
60053	Protective Eyewear Clear Lens
J63050	Journeyman™ High Leverage Cable Cutter
85191	Conduit-Fitting and Reaming Screwdriver

⚠WARNING: Blades are intended for cutting only, and should be handled and disposed of with care. Bending the blade can cause it to break, possibly resulting in bodily injury. Check local laws on legality of selling or possessing these knives.

⚠WARNING: Do NOT open the tape measure case. Spring motor is under tension, and opening may cause injury.

⚠WARNING: Never remove screws while fish tape is coiled inside reel.

