


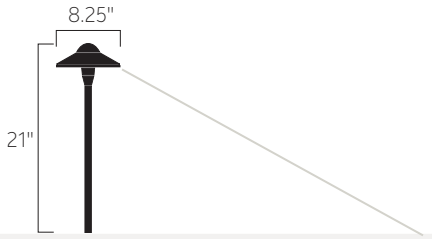
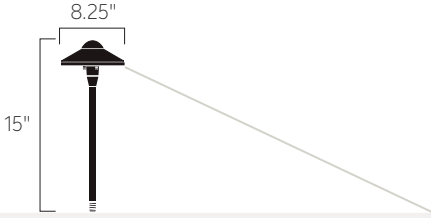




# Retrofit Path & Spread



	8" Dome		8" Dome Short Stem													
Finishes	<b>BKT (shown), AZT</b>		Additional Finishes	<b>AZT</b>												
Item Number and Finish	<b>15310</b> AZT <b>15310</b> BKT	<b>15310</b> AZT6 (pack of 6)	 AZT	<b>15410</b> AZT												
Housing	Cast Aluminum			Cast Aluminum												
Lamp Base	12V T5 Wedge base socket			12V T5 Wedge base socket												
Lamp Options-Power Usage at 12V AC input	<b>Incandescent:</b> 11.6W(VA) 912X (17023) 6.5W(VA) 918X (17022) 4W(VA) 901X (17021)	<b>LED:</b> 2W T5 Wedge (18039, 18040) Compares up to 16W Xenon 1.2W T5 Wedge (18198, 18199) Compares up to 10W Halogen 2W T5 Wedge (18204, 18205) Compares up to 20W Halogen	<b>Incandescent:</b> 11.6W(VA) 912X (17023) 6.5W(VA) 918X (17022) 4W(VA) 901X (17021)	<b>LED:</b> 2W T5 Wedge (18039, 18040) Compares up to 16W Xenon 1.2W T5 Wedge (18198, 18199) Compares up to 10W Halogen 2W T5 Wedge (18204, 18205) Compares up to 20W Halogen												
Wiring	24" of usable #18-2, SPT-1W leads. Cable connectors supplied.		<b>Coordinating Products</b>	30" of usable #18-2, SPT-1W leads. Cable connectors supplied.												
Notes	Includes 16.25W(VA) 921X (17025) Xenon lamp and 8" in-ground stake. LED version of fixture <b>15810</b> on page 52.		 Path Lights <b>15410 &amp; 15470</b> , see pages 131, 132	 Path Lights <b>15310 &amp; 15470</b> , see pages 131, 132												
Accessories	<b>15601</b> Surface Mounting Flange <b>15607</b> Surface Mounting Bracket															
Dimensions																
Photometrics*																
Distance from Light	1'	2'	3'	4'	5'	6'	7'	8'	1'	2'	3'	4'	5'	6'	7'	8'
Footcandles	8	4.1	1.6	.5	.4	.1	-	-	9.6	4	1.1	.03	.1	-	-	-