


Screwdrivers, Nut Drivers and Accessories

Offering a variety of tip types, hex sizes, shaft lengths, and handle designs, Klein has the screwdrivers and nut drivers professionals demand to get the job done with comfort and ease.



For Professionals...
Since 1857™

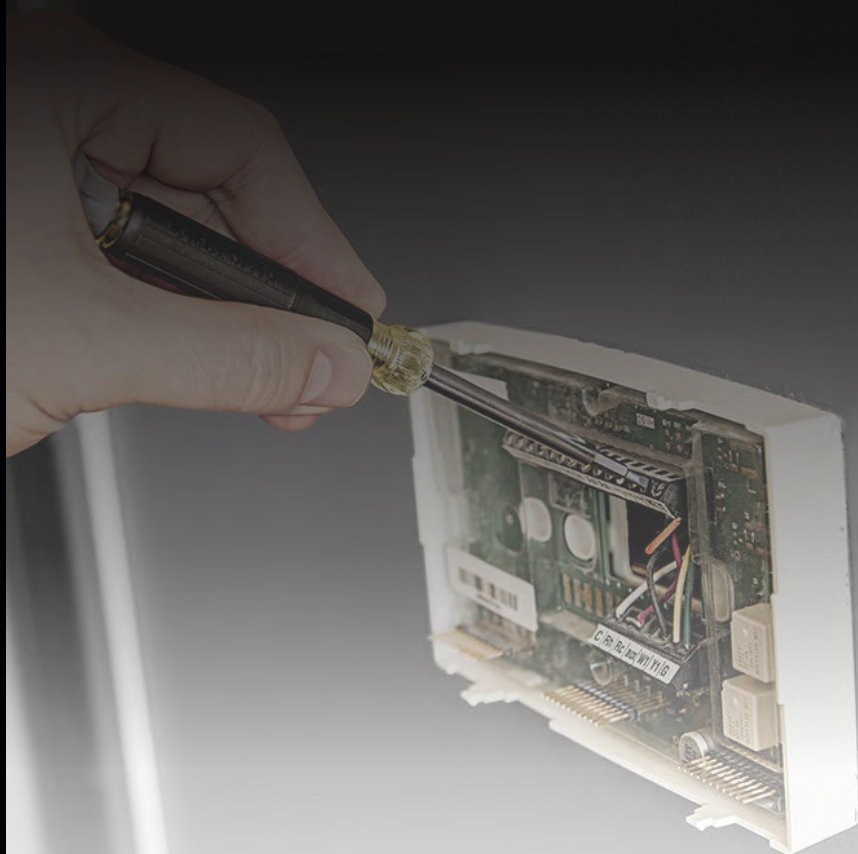


Introduction

Extra-quality features have made the Klein name famous for hand tools – features that assure greater convenience, comfort and efficiency in use, plus exceptional strength and durability.

All Klein drivers are made of the highest quality tempered steel and carefully heat-treated for maximum strength. Shafts have integral flanges that provide an extra-strong, torque-proof anchor in the handle. Strong, durable black tips are forged and precision ground with square edges to fit screw openings securely. They resist slippage and provide positive turning action.

Cushion-Grip screwdrivers feature super-comfortable, sure-grip handles on top-quality blades for the professional. All Klein screwdrivers meet or exceed applicable ANSI and MIL specifications.

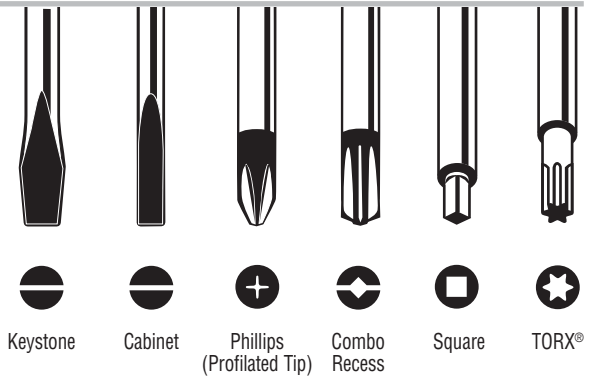

Using Screwdrivers and Nut Drivers

The size of the screw or nut and the type of opening it has determines which driver to use. Here are a few tips on how to use a driver that can be of benefit, because screwdrivers are the most often misused and abused hand tools of all.

1. Never use a driver to do another tool's job.

Using a driver as a pry bar, scraper, or a chisel can ruin the tool, spoil the work and cause injury.

2. Never push a driver beyond its capacity.

Make a pilot hole for the screw for easier driving. Use square-shank drivers for heavy work.

3. Never expose a driver to excessive heat.

Direct flame can draw the temper from the metal, weakening and possibly warping it, making it unsafe and inefficient to use.

4. Never use a driver at an angle to the screw.

Always keep the shank perpendicular to the screw head. Driving at an angle or using a point that is too small can spoil the screw or slip and damage the work.

5. Never depend on a driver's handle or covered blade to insulate you from electricity.

Plastic and Cushion-Grip handles are intended only to provide a firm, comfortable grip. Insulated blades are intended only as a protective measure against shorting out components. Only use insulated tools that are marked with the official international 1000-volt rating symbol if there is any chance that the tool will make contact with an energized source.

6. Discard damaged or worn drivers.

TORX® is a registered trademark of Acument Intellectual Properties, LLC.

MAGNETIZER

NEW!

Quickly **magnetize** and **demagnetize** screwdriver tips and bits using powerful rare-earth magnets

To magnetize screwdriver:

Insert screwdriver shaft fully into magnetizing slot; avoid rotating shaft while drawing out slowly



To demagnetize screwdriver:

Insert shaft fully into smallest demagnetizing slot that fits; avoid rotating shaft while drawing out slowly



Fits these drivers

- #3 Phillips
- 1/4" Keystone (round or square shank)
- 5/16" Cabinet
- #2 Phillips Insulated
- 1/4" Cabinet Insulated
- Most precision screwdrivers



Cat. No.	Overall Length	Overall Height	Overall Width	Weight
MAG2	2-13/64" (56.0 mm)	45/64" (17.9 mm)	1-3/32" (26.2 mm)	1.1 oz (32 g)

See page 295 for additional information on warnings.



Specialty Cushion-Grip Screwdrivers

2-in-1 Hex Slide Driver/Nut Driver

NEW!

- Unique, patented tip switches from 1/4" size to 5/16" size
- Magnetic regardless of which driver is selected
- Twist the thumb nut to lock tip setting
- U.S. Patent 7,654,175 B2



65129



Cat. No.	Type	Tip Size	Shank Length	Overall Length	Weight
65129 NEW!	Hex Driver	1/4", 5/16"	6" (152.4 mm)	10-1/4" (260.4 mm)	0.50 lb (0.23 kg)
65131 NEW!	Hex Driver	1/4", 5/16"	1-1/2" (38.1 mm)	3-23/64" (85.3 mm)	0.18 lb (0.08 kg)

2-in-1 Hex Head Screwdriver

- 1/4" and 5/16" six-point hex nut driver
- Powerful magnets for maximum fastener retention
- Solid build quality; feels like a conventional nut driver
- Color-coded bands for easy identification
- Wrench-assist to help remove stubborn fasteners



65064



Cat. No.	Type	Tip Size	Shank Length	Overall Length	Weight
65064	Hex Driver	1/4" and 5/16"	3-5/8" (92.1 mm)	8" (203.2 mm)	0.10 lb (0.05 kg)

Screw-Holding Screwdrivers

- Starts and drives screws with one hand when working in hard-to-reach spaces



32215



Cat. No.	Tip Type	Shank Type	Shank Length	Overall Length	Weight
32215	1/4" (6.4 mm) Cabinet	Round	7" (177.8 mm)	11-1/4" (285.8 mm)	0.32 lb (0.15 kg)
32216	#2 Phillips	Round	7" (177.8 mm)	11-1/4" (285.8 mm)	0.32 lb (0.15 kg)

Terminal Block Screwdriver

Includes core Cushion-Grip screwdriver features plus:

- Provides exact fit for terminal block screws
- Tip is up to 19% stronger than competitors and provides 76% higher torque value than the required ASME B107 Standard



612-4



Cat. No.	Tip Type	Shank Type	Shank Length	Overall Length	Weight
612-4	1/8" (3.2 mm) Cabinet	Round	4" (101.6 mm)	7-3/4" (196.9 mm)	0.15 lb (0.07 kg)





Specialty Screwdrivers

10-in-1 Folding Screwdriver/Nut Driver

10-FOLD™

- Conveniently folds up for easy storage or to fit into your pocket
- Each driver arm contains for interchangeable bit styles and two nut drivers
- Unfold each driver arm up to a full 180° for straight on driving power, or at 90° for extra leverage on stubborn fasteners
- The quick release button easily unlocks a fully extended driver arm



32534



Cat. No.	Nut Driver Sizes	Phillips Bits	Slotted Bits	Square Bits	Other Bits	Handle Color	Weight
32534	5/16", 1/4"	#1, #2	1/4" (6.4 mm), 3/16" (4.8 mm)	#1, #2	Valve Core Removal/Installation - Extractor	Blue	0.37 lb (0.17 kg)

Schrader® is a registered trademark of Schrader-Bridgeport International, Inc.


8-in-1 HVAC Slide Driver™ Screwdriver/Nut Driver

NEW!

- Unique, patented head slides back and forth to switch from 1/4" to 5/16" magnetic hex-head screwdriver
- Thumb nut locks tip setting
- Features a specialty bit for installation/removal of common TR-4 Schrader® valves
- Includes 1/4" and 3/8" hollow nut drivers, as well as #2 Phillips, 1/8" (3 mm) and 1/4" (6 mm) slotted screwdriver tips
- Cushion-Grip handle for greater torque and comfort
- Great for HVAC applications including thermostat installation and control work
- U.S. patent 7,654,175 B2



32596

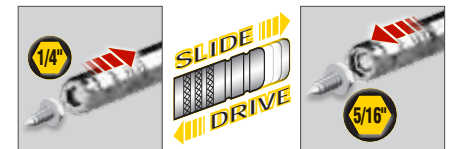

Cat. No.	Overall Length	Handle Color	Shank Length	Nut Driver Sizes	Phillips Bits	Slotted Bits	Other Bits	Weight
32596 NEW!	7-1/2" (190.5 mm)	Yellow/Black	3-1/4" (82.6 mm)	1/4", 5/16", 3/8"	#2	1/8" (3.2 mm), 1/4" (6.4 mm)	Schrader® Valve Core Removal	0.50 lb (0.2 kg)

Schrader® is a registered trademark of Schrader-Bridgeport International, Inc.

2-in-1 Hex Slide Driver/Nut Driver

NEW!

- Unique, patented tip switches from 1/4" size to 5/16" size
- Magnetic regardless of which driver is selected
- Twist the thumb nut to lock tip setting
- U.S. Patent 7,654,175 B2



65129



Cat. No.	Type	Tip Size	Shank Length	Overall Length	Weight
65129 NEW!	Hex Driver	1/4", 5/16"	6" (152.4 mm)	10-1/4" (260.4 mm)	0.50 lb (0.23 kg)
65131 NEW!	Hex Driver	1/4", 5/16"	1-1/2" (38.1 mm)	3-23/64" (85.3 mm)	0.18 lb (0.08 kg)

2-in-1 Hex Head Screwdriver

- 1/4" and 5/16" six-point hex nut driver
- Powerful magnets for maximum fastener retention
- Solid build quality; feels like a conventional nut driver
- Color coded bands for easy identification
- Wrench-assist to help remove stubborn fasteners



65064



Cat. No.	Type	Tip Size	Shank Length	Overall Length	Weight
65064	Hex Driver	1/4" and 5/16"	3-5/8" (92.1 mm)	8" (203.2 mm)	0.10 lb (0.05 kg)

See page 295 for additional information on warnings.

