


PEX BALL VALVES

Legend PEX MAINTENANCE-FREE Full Port Ball Valve

Legend has the most expansive offering of compact, durable and labor saving full port PEX ball valves. All Legend PEX ball valves feature the dual O-ring stem design that requires no packing nut removing the potential for call backs. The valves are constructed of binary brass to meet all no lead requirements. Three models are configurations based on the T-1001 model which feature dual Viton® O-rings, a corrosion resistant Dacromet® coated steel handle, and are constructed of no lead binary brass. These include the T-806NL and T-805NL. The T-2005NL, T-2006NL, T-2007NL, T-2008NL, & T-1960NL are based on the T-2000NL Full Port Ball Valve. These PEX models feature dual EPDM O-rings, zinc plated steel handle and are constructed of binary brass which are also dezincification resistant. All valves are third party certified no lead ANSI/NSF 61-G, NSF or IAPMO.



- Cold Working Pressure (CWP): 400 PSI
- PEX barb ends comply with ASTM F1807
- (Model T-1960) PEX barb ends comply with ASTM F-1960
- ANSI/ASTM B1.20.1 Male iron pipe threads
- ANSI/ASTM B16.18 Sweat

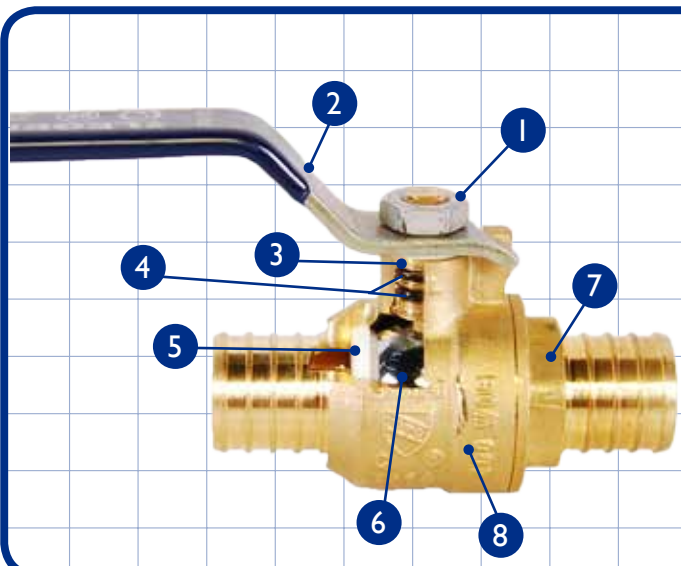

1. Zinc Plated Steel Nut
2. Zinc Plated Steel Handle with Vinyl Sleeve
3. No Lead Forged Brass Stem
4. Dual EPDM O-rings On Stem
5. PTFE Seats (2)
6. No Lead Chrome Plated Forged Brass Ball
7. No Lead Forged Brass End Adapter
8. No Lead Forged Brass Body

T-806NL No Lead Forged Brass PEX x PEX Maintenance-Free Full Port PEX Ball Valve


Maintenance-free dual Viton® O-ring stem seal, Dacromet® coated steel handle, CWP 400 PSI, ASTM F1806 PEX Ends. Third party certified no lead ANSI/NSF 61-G, NSF. Configuration and Sizes: PEX x PEX, 3/8" - 1".

T-805NL No Lead Forged Brass Sweat x PEX Maintenance-Free Full Port Ball Valve with Tee Handle


Maintenance-free dual Viton® O-ring stem seal, coated cast aluminum handle, CWP 400 PSI, ASTM F1806 PEX Ends. With coated cast aluminum tee handle. Third party certified no lead ANSI/NSF 61-G, NSF. Configuration and Sizes: Sweat x PEX, 1/2" & 3/4".

T-805NL No Lead Forged Brass MNPT x PEX Maintenance-Free Ball Valve with Tee Handle


Maintenance-free dual Viton® O-ring stem seal, coated cast aluminum handle, CWP 400 PSI, ASTM F1806. With coated cast aluminum tee handle. Third party certified no lead ANSI/NSF 61-G, NSF. Configuration and Sizes: MNPT x PEX, 1/2" & 3/4".

T-2006NL No Lead & DZR Forged Brass PEX x PEX Full Port Ball Valve


Maintenance-free dual EPDM® O-ring stem seal, zinc plated steel handle with vinyl cover CWP 400 PSI, ASTM F1806. Third party certified no lead ANSI/NSF 61-G & ANSI/NSF 14, IAPMO. Configuration and Sizes: PEX x DZR PEX, 1/2" - 1-1/4".

T-1960NL No Lead & DZR Forged Brass PEX x PEX Cold Expansion Full Port Ball Valve


Maintenance-free dual EPDM® O-ring stem seal, zinc plated steel handle with vinyl sleeve CWP 400 PSI, cold expansion PEX ends, ASTM F 1960. Third Party certified no lead ANSI/NSF 61-G & ANSI/NSF 14, IAPMO. Configuration and Sizes: PEX x DZR PEX, 1/2" - 1".