

## Condensate Removal Pumps

# VCMX SERIES

## High Capacity Model



VCMX- 20ULS

### Applications

- For removal of condensate from air conditioners, suitable for high efficiency gas furnace condensation and condensing boilers

### Features

- Fully automatic: start, stop, safety switch
- Check valve outlet: 3/8" (9.5 mm), for 3/8" (9.5 mm) ID
- cCSAus listed
- Options: safety switch, 20' (6 m) of 3/8" (9.5 mm) tubing and anti-sweat sleeve
- 1/30 hp high performance motor

### Series Specifications


**Shut Off:** 21" (4.8 mm)

**Maximum Liquid Temperature:**  
140 °F (60 °C)

**Electrical:** 115 V, 60 Hz, 1.5A, 93 W  
230 V, 50/60 Hz, 0.60A,  
75 W

**Operation:** Automatic

### Performance Curve

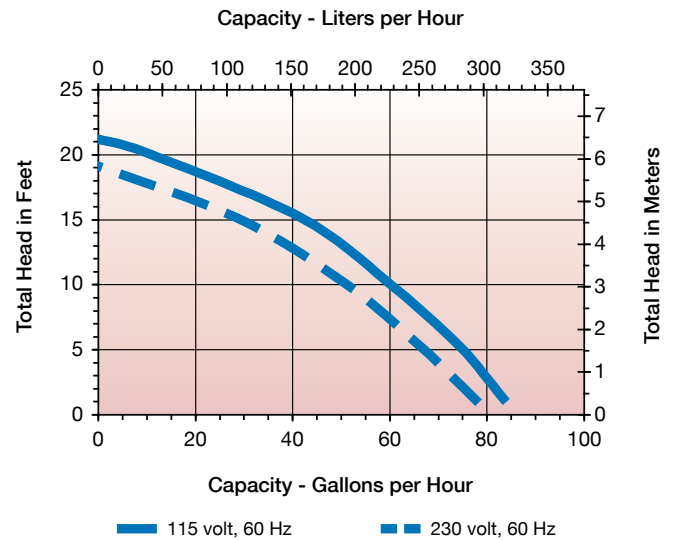

### Model Characteristics

#### NXTGen

Item #	Model	Performance (GPH @ Height in Feet)					Shut Off (ft.)	Volts	Hertz	Amps	Watts	Cord (ft.)	Check Valve	Safety Switch	Dimensions (inches)			List/Cert.
		1	5	10	15	20									Height	Length	Width	
554520	VCMX-20UL	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	No	6.5	10.2	4.8	cCSAus
554521	VCMX-20UL	80	69	54	36	0	20	230	50/60	0.6/0.5	75	6	3/8"	No	6.5	10.2	4.8	cCSAus
554530	VCMX-20ULS	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	Yes	6.5	10.2	4.8	cCSAus
554531	VCMX-20ULS	80	69	54	36	0	20	230	50/60	0.6/0.5	75	6	3/8"	Yes	6.5	10.2	4.8	cCSAus

#### NXTGen With Tubing

Item #	Model	Performance (GPH @ Height in Feet)					Shut Off (ft.)	Volts	Hertz	Amps	Watts	Cord (ft.)	Check Valve	Safety Switch	Dimensions (inches)			List/Cert.
		1	5	10	15	20									Height	Length	Width	
554550	VCMX-20ULST	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	Yes	6.5	10.2	4.8	cCSAus
554551	VCMX-20ULST	80	69	54	36	0	20	230	50/60	0.6/0.5	75	6	3/8"	Yes	6.5	10.2	4.8	cCSAus

#### NXTGen With Anti-Sweat Sleeve

Item #	Model	Performance (GPH @ Height in Feet)					Shut Off (ft.)	Volts	Hertz	Amps	Watts	Cord (ft.)	Check Valve	Safety Switch	Dimensions (inches)			List/Cert.
		1	5	10	15	20									Height	Length	Width	
554542	VCMX-20ULS-C	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	Yes	6.8	10.3	5.1	cCSAus