

Condensate Removal Pumps

VCMA SERIES Medium Tank



VCMA-15ULS

Applications

- For removal of condensate from an air conditioner, suitable for high efficiency, gas furnace condensation and condensing boilers

Features

- 1/50 hp high performance motor
- ABS tank, motor cover, and volute
- 1/2 gallon tank capacity
- Stainless steel shaft
- Snap-action switch
- Removable 3/8" (9.5 mm) barbed check valve
- 3 inlet drain holes
- Thermal overload protection
- Includes 20' (6.1 m) of 3/8" ID (9.5 mm) tubing (554411 and 554415 only)
- Safety switch (554405 and 554415 only)
- cCSAul

Series Specifications

Capacity: 65 gph @ 1'
(246 lph @ 0.31 m)

Shut Off: 15' (4.6 m)

Maximum Liquid Temperature:
140 °F (60 °C)

Discharge: 3/8" barbed (9.5 mm)


Impeller: Glass-filled polypropylene

Electrical: 115 V, 60 Hz, 1A

Operation: Automatic

Model Characteristics

Item #	Model	Volts	Capacity	
			Cord	Capacity
554401	VCMA-15UL	115	6'	65 GPH @ 1'
			1.8 m	246 LPH @ 0.31 m
554405	VCMA-15ULS	115	6'	65 GPH @ 1'
			1.8 m	246 LPH @ 0.31 m
554411	VCMA-15ULT	115	6'	65 GPH @ 1'
			1.8 m	246 LPH @ 0.31 m
554415	VCMA-15ULST	115	6'	65 GPH @ 1'
			1.8 m	246 LPH @ 0.31 m

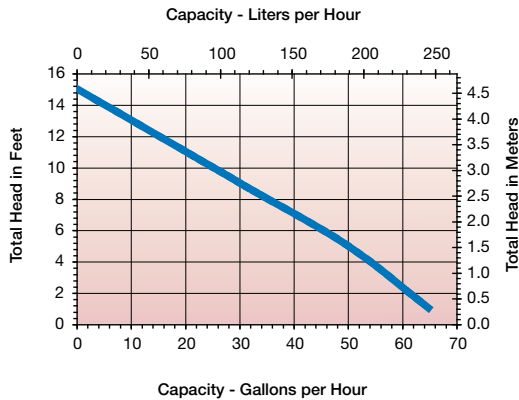

VCMA-20ULS

Applications

- For removal of condensate from an air conditioner, suitable for high efficiency, gas furnace condensation and condensing boilers

Features

- 1/30 hp high performance motor
- ABS tank, motor cover and volute
- 1/2 gallon tank capacity
- Stainless steel shaft
- Removable 3/8" (9.5 mm) barbed check valve
- 3 inlet drain holes
- Thermal overload protection
- Includes 20' (6.1 m) of 3/8" ID (9.5 mm) tubing (554431, 554435 and 554461 only)
- Safety switch (554435, 554425, 554455 and 554461 only)
- cCSAul

Series Specifications

Capacity: 80 gph @ 1'
(303 lph @ 0.31 m)

Shut Off: 20' (6.1 m) 115 V models
17' (5.2 m) 230 V models

Maximum Liquid Temperature:
140 °F (60 °C)

Discharge: 3/8" barbed (9.5 mm)

Impeller: Glass-filled polypropylene

Electrical: 115 V, 60 Hz, 1A

230 V, 50/60 Hz,
0.6/0.5A

Operation: Automatic

Model Characteristics

Item #	Model	Volts	Capacity	
			Cord	Capacity
554421	VCMA-20UL	115	6'	80 GPH @ 1'
			1.8 m	303 LPH @ 0.31 m
554451	VCMA-20UL	230	6'	80 GPH @ 1'
			1.8 m	303 LPH @ 0.31 m
554425	VCMA-20ULS	115	6'	80 GPH @ 1'
			1.8 m	303 LPH @ 0.31 m
554455	VCMA-20ULS	230	6'	80 GPH @ 1'
			1.8 m	303 LPH @ 0.31 m
554431	VCMA-20ULT	115	6'	80 GPH @ 1'
			1.8 m	303 LPH @ 0.31 m
554435	VCMA-20ULST	115	6'	80 GPH @ 1'
			1.8 m	303 LPH @ 0.31 m
554461	VCMA-20ULST	230	6'	80 GPH @ 1'
			1.8 m	303 LPH @ 0.31 m

