

Condensate Removal Pumps

VCL SERIES Large Tank



VCL-24ULS

Applications

- For removal of condensate from an air conditioner, suitable for high efficiency, gas furnace condensation and condensing boilers

Features

- 1/8 hp motor
- Galvanized steel tank cover
- ABS tank, volute and switch cover
- 1 gallon tank capacity
- Stainless steel shaft
- Snap-action switch
- Safety switch (553201, 553211)
- Thermal overload protection
- cCSAul

Series Specifications

Capacity: 270 gph @ 1'
(1022 lph @ 0.31 m)

Shut Off: 24' (7.3 m)

Liquid Temperature: 120 °F (49 °C)

Discharge: 3/8" barbed (9.5 mm)


Impeller: Polypropylene

Electrical: 115 V, 60 Hz, 2.5A
230 V, 50/60 Hz, 1.2A

Operation: Automatic

Model Characteristics

| Item # | Model | Volts | Cord | | Capacity | |
|--------|-----------|-------|------|-------|-------------------|-------------------|
| | | | 6' | 1.8 m | 270 GPH @ 1' | 1022 LPH @ 0.31 m |
| 553206 | VCL-24UL | 115 | 6' | 1.8 m | 270 GPH @ 1' | 1022 LPH @ 0.31 m |
| | | | 6' | 1.8 m | 1022 LPH @ 0.31 m | |
| 553201 | VCL-24ULS | 115 | 6' | 1.8 m | 270 GPH @ 1' | 1022 LPH @ 0.31 m |
| | | | 6' | 1.8 m | 1022 LPH @ 0.31 m | |
| 553211 | VCL-24ULS | 230 | 6' | 1.8 m | 270 GPH @ 1' | 1022 LPH @ 0.31 m |

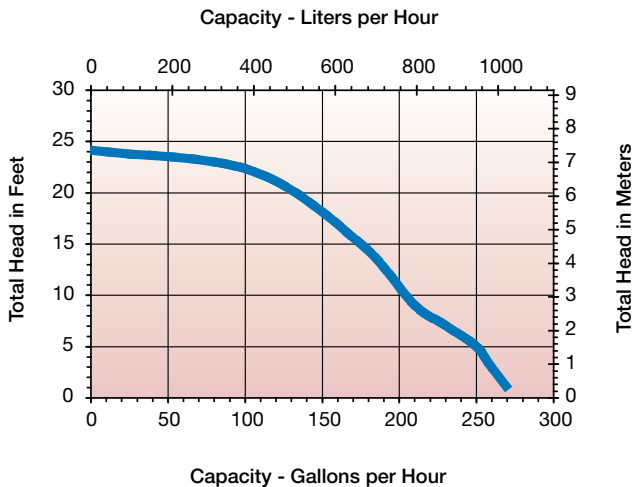

VCL-45ULS

Applications

- For removal of condensate from an air conditioner, suitable for high efficiency, gas furnace condensation and condensing boilers

Features

- 1/5 hp motor
- Galvanized steel tank cover
- ABS tank, volute and switch cover
- 1 gallon tank capacity
- Stainless steel shaft
- Snap-action switch
- Thermal overload protection
- 3/8" (9.5 mm) discharge copper tube
- cCSAul

Series Specifications

Capacity: 450 gph @ 1'
(1704 lph @ 0.31 m)

Shut Off: 45' (13.7 m)

Liquid Temperature: 120 °F (49 °C)

Discharge: 3/8" barbed (9.5 mm)

Impeller: Polypropylene

Electrical: 115 V, 60 Hz, 3.5A
230 V, 50/60 Hz, 1A

Operation: Automatic

Model Characteristics

| Item # | Model | Volts | Cord | | Capacity | |
|--------|-----------|-------|------|-------|-------------------|-------------------|
| | | | 6' | 1.8 m | 450 GPH @ 1' | 1704 LPH @ 0.31 m |
| 553240 | VCL-45ULS | 115 | 6' | 1.8 m | 450 GPH @ 1' | 1704 LPH @ 0.31 m |
| | | | 6' | 1.8 m | 1704 LPH @ 0.31 m | |
| 553245 | VCL-45ULS | 230 | 6' | 1.8 m | 450 GPH @ 1' | 1704 LPH @ 0.31 m |
| | | | 6' | 1.8 m | 1704 LPH @ 0.31 m | |

