

Sump Pumps

8 SERIES 4/10 HP



Applications

- Basement sumps, dewatering, water transfer

Features

- 4/10 hp shaded pole motor with overload protection
- Designed for continuous duty
- Epoxy coated cast iron housing
- Cast bronze housing available
- Carbon/ceramic shaft seal
- Upper and lower sintered sleeve bearings
- Integral diaphragm switch option for automatic operation
- Multiple power cord lengths available
- cCSAus

Series Specifications

Capacity: 54 gpm @ 5' (204 lpm @ 1.5 m)

Shut Off: 22.9' (6.98 m)

Liquid Temperature: 140 °F (60 °C)


Discharge: 1-1/2" FNPT (38 mm)

Impeller: Polypropylene

Electrical: 115 V, 50/60 Hz

Operation: Automatic or manual

Performance Curve

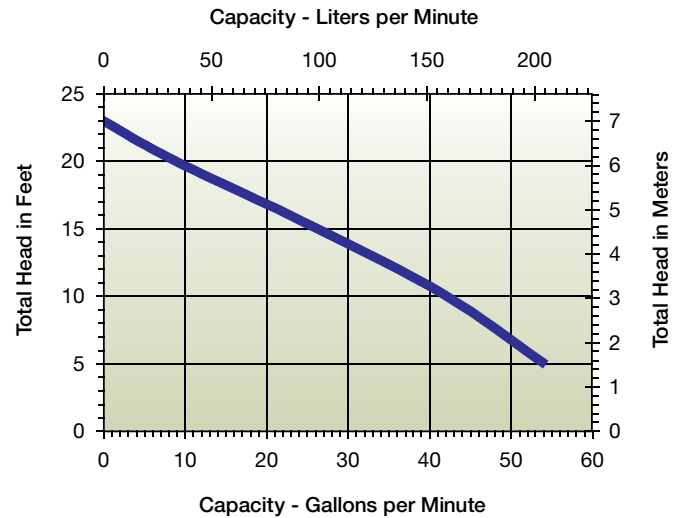

Model Characteristics

Item #	Model	Volts	Cord	Housing	Switch Type	On Level	Off Level
508157	8-CIA	115	10' 3 m	Epoxy Coated Cast Iron	Integral Diaphragm	7" - 10" 17.8 cm - 25.4 cm	1" - 4" 2.5 cm - 10.2 cm
508158	8-CIA	115	25' 7.6 m	Epoxy Coated Cast Iron	Integral Diaphragm	7" - 10" 17.8 cm - 25.4 cm	1" - 4" 2.5 cm - 10.2 cm
508357	8-CBA	115	10' 3 m	Bronze	Integral Diaphragm	7" - 10" 17.8 cm - 25.4 cm	1" - 4" 2.5 cm - 10.2 cm
508057	8-CIM	115	10' 3 m	Epoxy Coated Cast Iron	Manual	-	-
508058	8-CIM	115	25' 7.6 m	Epoxy Coated Cast Iron	Manual	-	-
508257	8-CBM	115	10' 3 m	Bronze	Manual	-	-