

Sump Pumps

WRS SERIES

1/3 HP

Sump Packaged Systems



Applications

- Impractical gravity drainage areas, under sinks, laundry trays

Features


- Pre-assembled for easy installation
- Two tank size options available
- Multiple pump performance options
- Cylindrical polypropylene tank
- Includes 2 - 1-1/2" MNPT x 2" slip adapters for inlet and discharge and 1 - 2" MNPT x 1-1/2" slip adapter for vent
- Easy to remove filter trap available
- cCSAus (115 V models only)
- IAPMO approved basins

Series Specifications

Electrical: 115 V, 60 Hz
230 V, 50/60 Hz

Operation: Automatic

Performance Curve

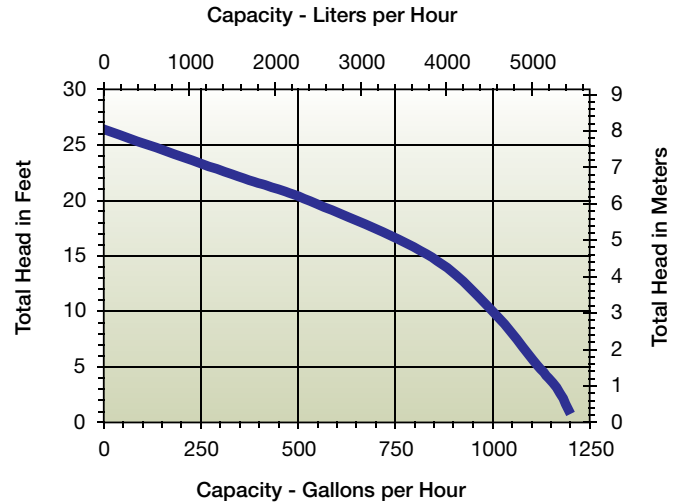

Model Characteristics

Item #	Model	Tank Size	Filter Trap	Lid Side Intake Port	Lid Top Discharge Port	Lid Top Vent Port	Pipe Size Included (From Pump To Lid)
505055	WRS-5	5 Gallon	✓	1-1/2" FNPT 38 mm	1-1/2" FNPT 38 mm	2" FNPT 51 mm	1" Dia. 25.4 mm
506055	WRS-6	5 Gallon	✓	1-1/2" FNPT 38 mm	1-1/2" FNPT 38 mm	2" FNPT 51 mm	1-1/2" Dia. 38 mm
506056	WRS-6	5 Gallon	✓	1-1/2" FNPT 38 mm	1-1/2" FNPT 38 mm	2" FNPT 51 mm	1-1/2" Dia. 38 mm
509150	WRS-8E	5 Gallon	-	1-1/2" FNPT 38 mm	1-1/2" FNPT 38 mm	2" FNPT 51 mm	1-1/2" Dia. 38 mm
506065	WRSC-6	3.5 Gallon	✓	1-1/2" FNPT 38 mm	1-1/2" FNPT 38 mm	2" FNPT 51 mm	1-1/2" Dia. 38 mm
506066	WRSC-6	3.5 Gallon	✓	1-1/2" FNPT 38 mm	1-1/2" FNPT 38 mm	2" FNPT 51 mm	1-1/2" Dia. 38 mm

Item #	Model	HP	Volts	Pump Capacity	Shut Off	Cord	Switch Type	On Level	Off Level
505055	WRS-5	1/6	115	1200 gph @ 1' 4542 lph @ .3m	21' 6.4 m	9' 2.7 m	Piggyback Diaphragm	6" - 9" 15.2 cm - 23 cm	1" - 4" 2.5 cm - 10 cm
506055	WRS-6	1/3	115	46 gpm @ 5' 174 lpm @ 1.5 m	18' 5.5 m	9' 2.7 m	Integral Diaphragm	7" - 10" 17.8 cm - 25.4 cm	1" - 4" 2.5 cm - 10.2 cm
506056	WRS-6	1/3	230	46 gpm @ 5' 174 lpm @ 1.5 m	18' 5.5 m	9' 2.7 m	Integral Diaphragm	7" - 10" 17.8 cm - 25.4 cm	1" - 4" 2.5 cm - 10.2 cm
509150	WRS-8E	1/3	115	52 gpm @ 5' 197 lpm @ 1.5 m	21' 6.4 m	9' 2.7 m	Piggyback Vertical Master	7" - 10" 17.8 cm - 25.4 cm	2" - 5" 5 cm - 12.7 cm
506065	WRSC-6	1/3	115	46 gpm @ 5' 174 lpm @ 1.5 m	18' 5.5 m	9' 2.7 m	Integral Diaphragm	4" - 7" 10.2 cm - 17.8 cm	1 - 3" 2.5 cm - 7.6 cm
506066	WRSC-6	1/3	230	46 gpm @ 5' 174 lpm @ 1.5 m	18' 5.5 m	9' 2.7 m	Integral Diaphragm	4" - 7" 10.2 cm - 17.8 cm	1 - 3" 2.5 cm - 7.6 cm