

200A/Position Meter Mounting Equipment

Residential^{①②③}, Horizontal Gang, 4 terminal for 1 phase, 3 wire



No. pos.	Cont. amp rating	Overall Amp.	Connectors Line	Load	Bypass	No. of term.	Dimensions W	H	D	Hub opening	Catalog number
Approved for Allegheny Power, PECO, Philadelphia Electric and UGI											
2	200	200	1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	24.0	14.5	5.1	HD Opening	UA2717-YPZA
3	200	270	1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	32.0	14.5	5.1	HD Opening	UA3717-YPZA
4	200	360	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	43.0	14.5	5.1	HD Opening	UA4719-YPZA
5	200	450	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	51.0	14.5	5.1	2 HD Openings	UA5719-KPZA
6	200	528	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	59.0	14.5	5.1	2 HD Openings	UA6719-KPZA
Approved for Delmarva/Atlantic Electric (Pepco/Connectiv)											
2	200	200	1/0-600 KCMIL	#6-350 KCMIL	UG	4	24.0	14.5	5.1	Blank Top	UA2717-PPCV
2	200	200	1/0-600 KCMIL	#6-350 KCMIL	OH	4	24.0	14.5	5.1	HD Cl. Plate	UA2717-ZPCV
4	200	360	(2) 1/0-600 KCMIL	#6-350 KCMIL	UG	4	43.0	14.5	5.1	Blank Top	UA4719-PPCV
4	200	360	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH	4	43.0	14.5	5.1	HD Cl. Plate	UA4719-ZPCV
6	200	528	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH	4	59.0	14.5	5.1	2 HD Cl. Plates	UA6719-MPCV
6	200	528	(2) 1/0-600 KCMIL	#6-350 KCMIL	UG	4	59.0	14.5	5.1	Blank Top	UA6719-PPCV
Approved for First Energy and PP&L											
2	200	200	1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	24.0	14.5	5.1	HD Opening	UA2717-YPGP
3	200	270	1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	32.0	14.5	5.1	HD Opening	UA3717-YPGP
4	200	360	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	43	14.5	5.1	HD Opening	UA4719-YPGP
5	200	450	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	51.0	14.5	5.1	2 HD Openings	UA5719-KPGP
4	200	528	(2) 1/0-600 KCMIL	#6-350 KCMIL	OH/UG	4	59	14.5	5.1	2 HD Openings	UA6719-KPGP

① All units are equipped with a ground lug.


② All sockets are suitable for either overhead or underground feed.

③ 5th terminal kit for field installation: H659-0121.

Accessories page 26.

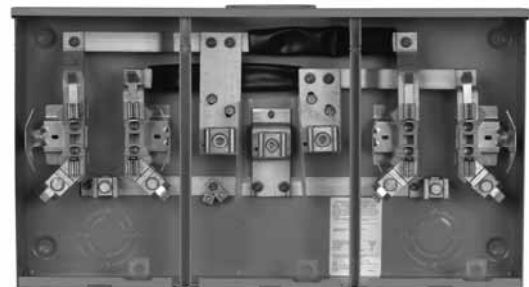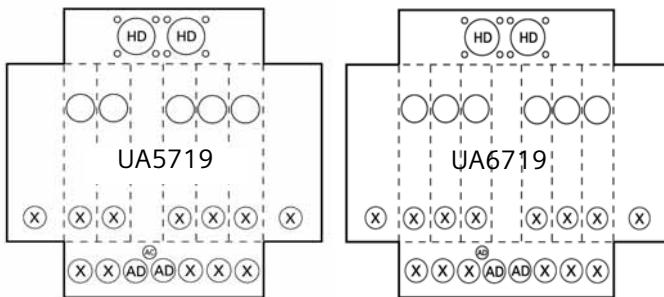

UA217-YPQG

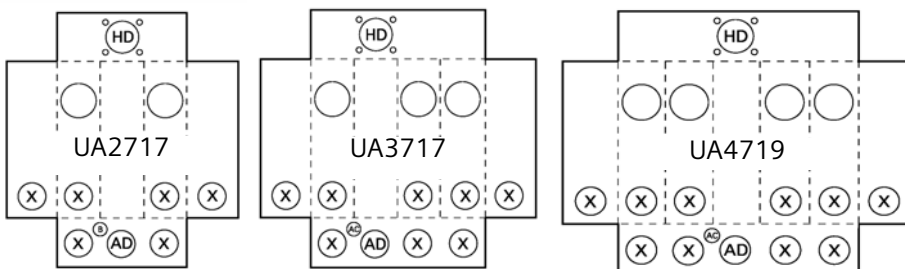

Knockouts (inches):	
X:	1-1/4, 1-1/2, 2, 2-1/2
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	Ø4.281 HUB OP
RX:	Ø2.750 HUB OP