2.94 in (75 mm)

4.69 in (119 mm)

.30 in (7.6 mm) profile

Shown actual size: Maestro dimmer and 1-gang Claro wallplate in White (WH).

Product family features

- True multi-location dimming from every location
- Tap on to preset level; tap off; tap twice for full on; touch rocker to adjust light level
- LEDs indicate light level and glow softly in the dark
- Delayed off provides light as you exit the room
- Line frequency compensation maintains stable light levels despite power line frequency and voltage variations
- Programming allows customized functions
- C·L, eco-dim, and eco-timer models available
- Coordinating Claro, Satin Colors, and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates; see p. 223

Direct load type compatibility

- Dimmable LED/CFL lighting (screw-base)
- Incandescent/halogen lighting
- Magnetic low-voltage lighting
- Electronic low-voltage lighting
- LED lighting
- Fluorescent lighting
- Switched lighting/motor

Control types

- Single-pole (one location)
- 3-way (2 locations)
- Multi-location (up to 10 locations)

Load type requiring load interface

- Neon/cold cathode lighting

Lighting load interfaces may be required for some load type, voltage, and capacity combinations. For additional information, see pp. 259–263.
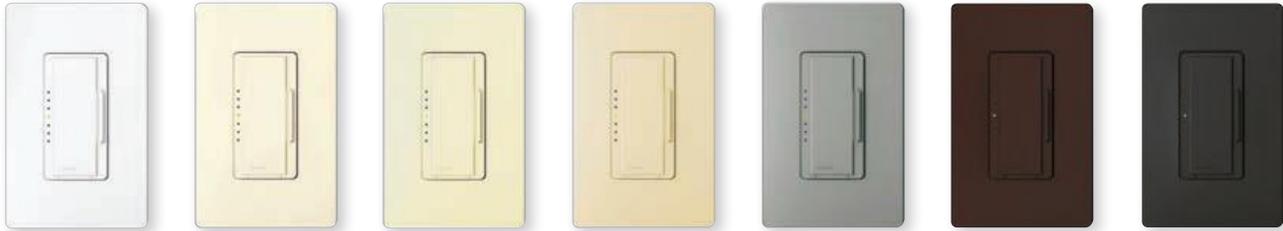
Available finishes

Use **BOLD** color code in model number (Example: MA-600-**BR**)

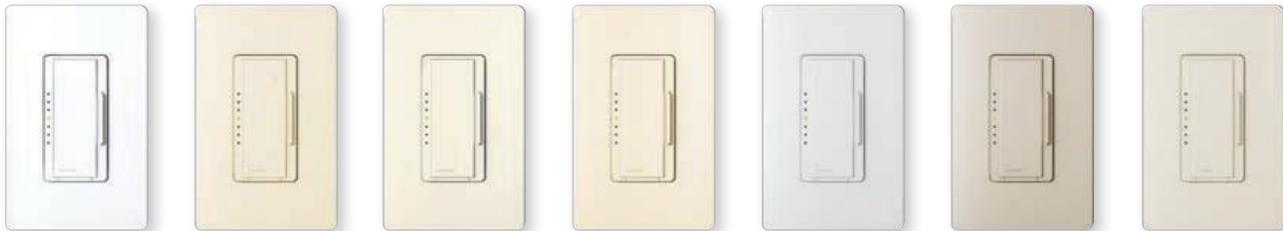Gloss*

WH White	**LA** Light Almond	**AL** Almond	**IV** Ivory	**GR** Gray	**BR** Brown	**BL** Black

Satin Colors*

SW Snow	**LS** Limestone	**BI** Biscuit	**ES** Eggshell	**PD** Palladium	**TP** Taupe	**ST** Stone
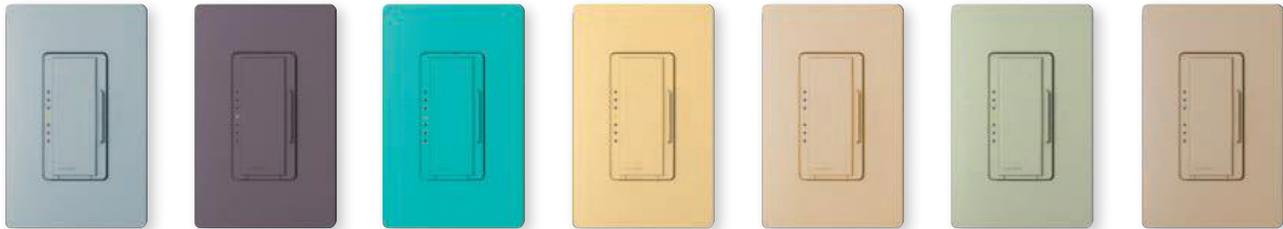
BG Bluestone	**PL** Plum	**TQ** Turquoise	**GS** Goldstone	**DS** Desert Stone	**GB** Greenbriar	**MS** Mocha Stone

Metal wallplate**

TC Terracotta	**SI** Sienna	**HT** Hot	**MR** Merlot	**MN** Midnight	**SS** Stainless Steel

* Coordinating wallplates only available separately. For wallplate information, see pp. 222–223.

** Stainless Steel metal wallplate only available separately and includes black plastic trim/adapter, visible from side. Match with separate Black (BL) or Midnight (MN) controls. For wallplate information, see pp. 222–223.

Digital fade dimmers

- Provides true dimming from each location (with companion dimmers)
- C·L dimmer provides reliable dimming of dimmable LEDs/CFLs, as well as halogens and incandescents

💡/💡 Dimmable LED/CFL (screw-base) dimmer
💡 Incandescent/halogen dimmer

Digital fade C·L dimmer*

Multi-location/3-way†/ single-pole 120V 150W (LED/CFL), 600W (Inc)	MACL-153M-**XX**[1]

Visit **lutron.com/compatibility** for an approved list of dimmable LED lamps. See p. 250 to calculate wattage when mixing lamp types.

Adjustable low-end trim.

Digital fade C·L dimmer* with companion dimmer and two wallplates

Multi-location/3-way†/ single-pole 120V 150W (LED/CFL), 600W (Inc)	MACL-153M-RHW-**XX**[2]

Visit **lutron.com/compatibility** for an approved list of dimmable LED lamps. See p. 250 to calculate wattage when mixing lamp types.

Adjustable low-end trim.

💡 Incandescent/halogen dimmers

Digital fade dimmers*

Multi-location/single-pole 120V 600W	MA-600-**XX**[3]
	MSC-600M-**XX**[4]
Multi-location/single-pole 120V 1000W	MA-1000-**XX**[3]
	MSC-1000M-**XX**[4]

Digital fade dimmer* with wallplate

Multi-location/single-pole 120V 600W	MA-600HW-BLSS

Package includes dimmer in Gloss Black finish and Stainless Steel wallplate.

Digital fade dimmer* with companion dimmer and two wallplates

Multi-location/single-pole 120V 600W	MAW-603-RH-WH

eco-dim digital fade dimmer*,**

Multi-location/single-pole 120V 600W	MA-600G-**XX**[5]

💡 Magnetic low-voltage dimmers

Digital fade dimmers*

Multi-location/single-pole 120V 600VA (450W)	MALV-600-**XX**[1]
	MSCLV-600M-**XX**[2]
Multi-location/single-pole 120V 1000VA (800W)	MALV-1000-**XX**[1]
	MSCLV-1000M-**XX**[2]

The stated VA (volt-ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

XX[1]: Gloss and Satin Colors codes, see p. 17
XX[2]: Available in Gloss White (WH), Ivory (IV), Almond (AL), Light Almond (LA), and Black (BL)
XX[3]: Gloss color codes, see p. 17
XX[4]: Satin Colors codes, see p. 17
XX[5]: Available in Gloss White (WH), Ivory (IV), Almond (AL), and Light Almond (LA)
Wallplates not included. Order separately, see pp. 222–223

All models must be derated if ganged unless otherwise noted, see pp. 250 and 254–257.

* Minimum load required, visit **lutron.com/faq** for more information
** Maximum light output of 85% guarantees 15% energy savings over standard switches
† Works with a standard mechanical 3-way switch