

# Laing Thermotech Series E5 Brass AC Electronically Commutated Spherical Motor Centrifugal Pumps



# **Applications**

# Specifically designed for the following uses:

- Hot Water Circulation
- Fan Coil Heating
- Solar Heating
- Radiant Heating Systems

# **Specifications**

# **Pump:**

Max Capacities: 6 GPM

• Max Head: 13'

• Pipe Connections:

½" FPT and ½" Sweat Suction and Discharge

- Maximum Working Pressure: 145 PSI
- Maximum Temperature: 203° F
- Rotation: counter clockwise when viewed from the motor end

# Motor:

- Canned Spherical Motor Type
- World Voltage 100-240 Volt 50/60 Hz Cycle
- 12-28 Watts
- Automatic Overload Protection
- Low In-Rush Current

#### **Features**

# **Compact Design:**

Close coupled, space saving design provides easy installation.

#### Mounting:

Pump can be mounted horizontally or vertically with motor end down.

#### **Construction:**

Wetted parts are brass, 316SS, thermoplastic, carbon and ceramic for corrosion resistance.

### **Ceramic Bearing Ball and Carbon Bearing Cap:**

High density ceramic bearing ball and graphite impeller bearing cap designed for high efficiency and long life.

#### Impeller:

Highly efficient and dynamically balanced with carbon bearing for smooth ultra quiet operation.

#### Casing:

Casing is lead free brass construction.

#### **Mechanical Seal:**

Unique patented design has no mechanical seal which is a potential leak path.

## Motor:

Highly efficient and ultra quiet spherical motor design. Pump is designed for continuous operation. All ratings are within working limits of the motor.

#### **Electronics:**

Embedded microprocessor control is self-regulating and available with variable speed dial control (potentiometer) on the pump or as an optional PWM input for OEM.

#### Noise level:

Whisper quiet, less than 40 db.


#### Weight:


Lightweight construction weighs less than 3lbs.

# Laing Thermotech Series E5 Brass Specifications

# **Materials of Construction (Wetted Parts)**

Part	Materials
Pump Housing	Brass
"O" Ring	EPDM or Viton
Impeller	Polyphenylene Oxide (PPO)
Bearing	Carbon/Aluminum Ceramic
All Other Wetted Parts	316 Stainless Steel

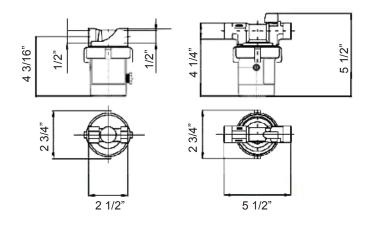

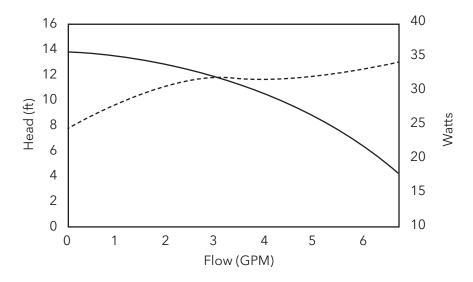



Xylem Inc. 3878 S. Willow, Suite 104 Fresno, CA 93725

Tel: (559) 265-4730 (800) 554-6853 Fax: (559) 265-4740 (800) 453-7523 www.Laing-thermotech.com