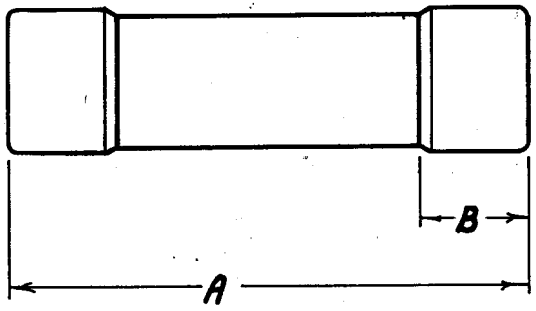



FERRULE TYPE (FERRULES PLATED)

AMPERE RATING	VOLTAGE	A	B	C	CATALOG NOS.
0-30	250	2	1/2	9/16	OT (AMP RATING)
31-60	250	3	5/8	13/16	OT (AMP RATING)
0-30	600	5	5/8	13/16	OTS (AMP RATING)
31-60	600	5 1/2	5/8	1 1/16	OTS (AMP RATING)



NO PINS

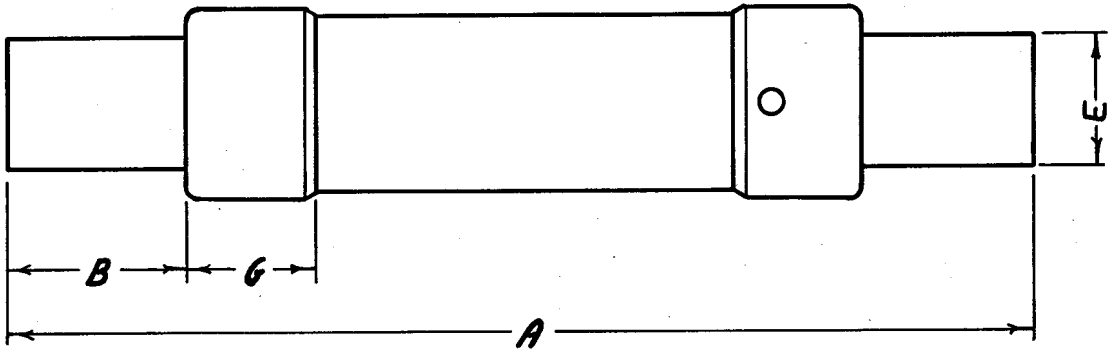

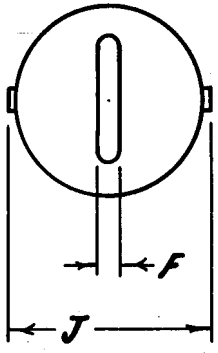

KNIFE-BLADE TYPE (BLADES-PLATED)

CATALOG NOS.	AMPERE RATING	VOLTAGE	A	B	C	E	F	G	J
OT (AMP RATING)	61-100	250	5 7/8	1	1.050	3/4	1/8	3/4	NO PINS
OT (AMP RATING)	101-200	250	7 1/8	1 3/8	1.585	1 1/8	3/16	7/8	1.654
OT (AMP RATING)	201-400	250	8 5/8	1 7/8	2.085	1 5/8	1/4	1 3/32	2.406
OT (AMP RATING)	401-600	250	10 3/8	2 1/4	2.580	2	1/4	1 1/4	2.906
OTS (AMP RATING)	61-100	600	7 7/8	1	1.336	3/4	1/8	3/4	NO PINS
OTS (AMP RATING)	101-200	600	9 5/8	1 3/8	1.830	1 1/8	3/16	1	1.968
OTS (AMP RATING)	201-400	600	11 5/8	1 7/8	2.580	1 5/8	1/4	1 1/4	2.906
OTS (AMP RATING)	401-600	600	13 3/8	2 1/4	2.960	2	1/4	1 1/2	3.419

J	OTS (61-100) 600V. C DIM 1.336 WAS 1.056. SMC. 10-6-82. A.R.F. 10-19-82
H	REMOVED SILVER PLATE 5-2-80 R.M.M. 2373
G	REDRAWN; REVISED TO MATCH ASSEMBLY'S. REMOVE DIE COLS. FROM FERRULE TYPE, D+H FROM BLADE TYPE. 2-1-78 A.R.F.

GOULD Gould Inc., Electric Fuse Division
374 Merrimac St., Newburyport, MA 01950
Manufacturer of Chase-Shawmut Fuses

OUTLINE DIMENSIONS ONE-TIME FUSES 0-600A. 250-600V.

DRAWN	RICK EATON 2-1-78
CHKD	A.R.F. 4-5-78
SCALE	NONE

13683

SHEET OF

A B C D E F G H J K L M N O P R S T U

MAKEPEACE P-1992