


ProLine[®]
SERIES



ProLine[®] Ball Valves are precisely engineered for outstanding service, long life and reliable performance. These valves offer convenient operation, superior flow and include a wide range of water/oil/gas (WOG) valves, gas valves and water valves constructed from forged brass, brass, CPVC and PVC materials. Valves are arranged in series reflecting the valves' performance characteristics, connection types and handle style. ProLine[®] Ball Valves meet UPC and ICC plumbing code requirements and are certified to meet NSF 61 with many available in lead-free compliant versions.

A BRAND OF MUELLER INDUSTRIES

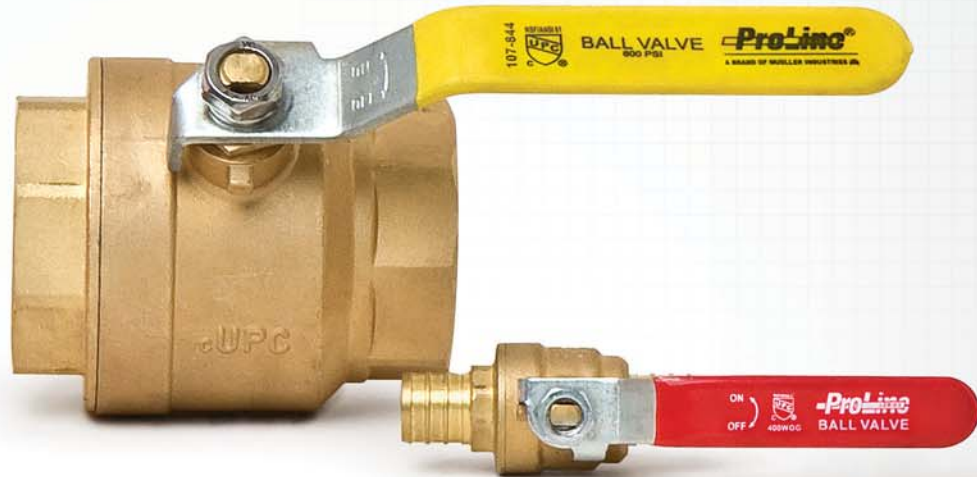

BALL VALVES



SERIES 7700 • BALL VALVE • STOP & WASTE • 600PSI FORGED BRASS

Item No. Valve Size Connection Inner Qty. Master Qty. Each Wt.

SERIES 7700TD – THREADED

107-753*	1/2"	FPT x FPT	10	100	0.40
107-754*	3/4"	FPT x FPT	10	60	0.65
107-755*	1"	FPT x FPT	6	36	1.00

- 600 PSI WOG/150 WSP
- -20°F to 300°F temperature range
- Suitable for vacuum use up to 7 PSIA
- Port allows non-pressure side to drain when closed

- NSF approved
- Hollow ball for lighter weight and longer seat life
- Threaded ends comply with ANSI B1.20.1



SERIES 7700SD – SOLDER

107-553*	1/2"	C x C	10	100	0.40
107-554*	3/4"	C x C	10	60	0.60
107-555*	1"	C x C	6	36	0.90

- 600 PSI WOG/150 WSP
- -20°F to 300°F temperature range
- Suitable for vacuum use up to 7 PSIA
- Port allows non-pressure side to drain when closed
- NSF approved

- Hollow ball for lighter weight and longer seat life
- Solder ends comply with ANSI B16.18



SERIES 7700TD – THREADED – NO LEAD

107-753NL	1/2"	FPT x FPT	10	100	0.40
107-754NL	3/4"	FPT x FPT	10	60	0.65
107-755NL	1"	FPT x FPT	6	36	1.00

- 600 PSI WOG/150 WSP
- NSF approved
- -20°F to 300°F temperature range
- Suitable for vacuum use up to 7 PSIA
- Port allows non-pressure side to drain when closed

- Hollow ball for lighter weight and longer seat life
- Threaded ends comply with ANSI B1.20.1
- California "Lead-Free" Compliant



SERIES 7700SD – SOLDER – NO LEAD

107-553NL	1/2"	C x C	-	10	0.40
107-554NL	3/4"	C x C	-	-	0.60
107-555NL	1"	C x C	6	36	0.90

- 600 PSI WOG/150 WSP
- NSF approved
- -20°F to 300°F temperature range
- Suitable for vacuum use up to 7 PSIA
- Port allows non-pressure side to drain when closed

- Hollow ball for lighter weight and longer seat life
- Solder ends comply with ANSI B16.18
- California "Lead-Free" Compliant

