


**ProLine**<sup>®</sup>  
SERIES



ProLine<sup>®</sup> Ball Valves are precisely engineered for outstanding service, long life and reliable performance. These valves offer convenient operation, superior flow and include a wide range of water/oil/gas (WOG) valves, gas valves and water valves constructed from forged brass, brass, CPVC and PVC materials. Valves are arranged in series reflecting the valves' performance characteristics, connection types and handle style. ProLine<sup>®</sup> Ball Valves meet UPC and ICC plumbing code requirements and are certified to meet NSF 61 with many available in lead-free compliant versions.

A BRAND OF MUELLER INDUSTRIES

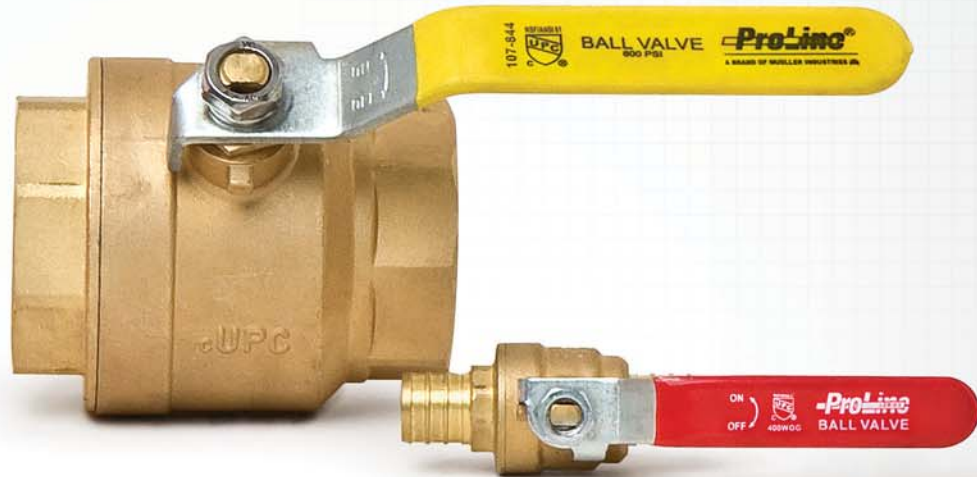

BALL VALVES

CONTINUED FROM PREVIOUS PAGE



**SERIES 7700 • BALL VALVE • FULL PORT • PACKING GLAND • 600 PSI FORGED BRASS**

Item No.	Valve Size	Connection	Inner Qty.	Master Qty.	Each Wt.		
<b>SERIES 7700T – THREADED – NO LEAD</b>							
107-821NL	1/4"	FPT x FPT	15	120	0.30	<ul style="list-style-type: none"> <li>• 600 PSI WOG/150 WSP (1/2" - 2")</li> <li>• NSF approved</li> <li>• -20°F to 300°F temperature range</li> <li>• PTFE packing and seats</li> <li>• Rust-resistant heavy-duty handle with vinyl grip</li> <li>• Threaded ends comply with ANSI B1.20.1</li> <li>• Full port for maximum flow rate</li> </ul>	<ul style="list-style-type: none"> <li>• Packing Gland - blowout proof stem design</li> <li>• CSA - CGA/CR91-002 (2&amp;5 PSIG)</li> <li>• CSA - CGA3.16-M88 (125 PSIG)</li> <li>• ASME B16.33 (125 PSIG)</li> <li>• ASME B16.44 (2&amp;5 PSIG)</li> <li>• California "Lead-Free" Compliant</li> </ul>
107-822NL	3/8"	FPT x FPT	15	120	0.30		
107-823NL	1/2"	FPT x FPT	-	20	0.50		
107-824NL	3/4"	FPT x FPT	-	15	0.73		
107-825NL	1"	FPT x FPT	-	10	1.00		
107-826NL	1-1/4"	FPT x FPT	4	24	1.69		
107-827NL	1-1/2"	FPT x FPT	2	24	2.27		
107-828NL	2"	FPT x FPT	2	12	3.56		
<b>SERIES 7700S – THREADED – NO LEAD</b>							
107-829NL*	2-1/2"	FPT x FPT	2	6	6.49	<ul style="list-style-type: none"> <li>• 400 PSI Non-Shock WOG (2-1/2" - 4")</li> <li>• NSF approved</li> <li>• -20°F to 300°F temperature range</li> <li>• PTFE packing and seats</li> <li>• Rust-resistant heavy-duty handle with vinyl grip</li> <li>• Threaded ends comply with ANSI B1.20.1</li> </ul>	<ul style="list-style-type: none"> <li>• Full port for maximum flow rate</li> <li>• Packing Gland - blowout-proof stem design</li> <li>• California "Lead-Free" Compliant</li> </ul>
107-830NL*	3"	FPT x FPT	2	4	8.80		
107-831NL*	4"	FPT x FPT	-	2	16.50		
<b>SERIES 7700S – SOLDER – NO LEAD</b>							
107-843NL	1/2"	C x C	-	25	0.42	<ul style="list-style-type: none"> <li>• 600 PSI WOG/150 WSP (1/2" - 2")</li> <li>• NSF approved</li> <li>• -20°F to 300°F temperature range</li> <li>• PTFE packing and seats</li> <li>• Rust-resistant heavy-duty handle with vinyl grip</li> <li>• Solder ends comply with ANSI B16.18</li> </ul>	<ul style="list-style-type: none"> <li>• Full port for maximum flow rate</li> <li>• Packing Gland - blowout-proof stem design</li> <li>• California "Lead-Free" Compliant</li> </ul>
107-844NL	3/4"	C x C	-	15	0.71		
107-845NL	1"	C x C	-	10	0.92		
107-846NL	1-1/4"	C x C	4	24	1.63		
107-847NL	1-1/2"	C x C	2	24	2.41		
107-847NL	2"	C x C	2	12	3.65		
<b>SERIES 7700S – SOLDER – NO LEAD</b>							
107-849NL*	2-1/2"	C x C	2	6	6.49	<ul style="list-style-type: none"> <li>• 400 PSI Non-Shock WOG (2-1/2" - 4")</li> <li>• NSF approved</li> <li>• -20°F to 300°F temperature range</li> <li>• PTFE packing and seats</li> <li>• Rust-resistant heavy-duty handle with vinyl grip</li> <li>• Solder ends comply with ANSI B16.18</li> </ul>	<ul style="list-style-type: none"> <li>• Full port for maximum flow rate</li> <li>• Packing Gland - blowout-proof stem design</li> <li>• California "Lead-Free" Compliant</li> </ul>
107-850NL*	3"	C x C	2	4	9.02		
107-851NL*	4"	C x C	-	2	15.18		



\* Please call for availability.