



Endura™ Unbreakable Thermoplastic Wallplates

STRENGTH

- Made from the most rugged thermoplastic available, Endura wallplates will not crack during installation or after many years of use.
- Withstand several times more impact, torque, and load deflection than thermoset plates.
- Flexible design fits over uneven wall surfaces.
- Thicker than nylon plates.
- Will not fade or warp due to UV light or humidity.
- Resist grease, oils, and solvents.
- Excellent color retention – will not fade or discolor.

SELECTION

- The industry's widest selection of plastic wallplate openings.
- Complete line of communication plates for phone, cable, and data transmission applications.
- Standard configurations available from 1 to 6 gang.
- 7 colors.
- Matching metal screws; self-retaining screw openings on popular configurations to speed installation.

SPECIAL APPLICATIONS

- Specification grade material, suitable for hospitals, schools, and other institutional facilities.
- Custom wallplates – Endura thermoplastic is uniquely suited to stamping special openings.
- Silk-screening and engraving.


Meet or exceed UL, CSA, and NEC requirements.









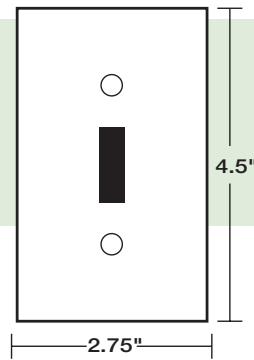






Standard Size



UL Listed 883 except where noted by asterisk (*).



	White	Brown	Ivory	Almond	Gray	Red	Box Quantity	Carton Quantity	Weight per 100 units
 1 Toggle Switch (1T)	90071	91071	92071	77071A	77071G	77071R	25	250	6 lbs.
 2 Toggle Switches (2T)	90072	91072	92072	77072A	77072G	77072R	10	100	11 lbs.
 3 Toggle Switches (3T)	90073	91073	92073	77073A	77073G	77073R	10	80	16 lbs.
 4 Toggle Switches (4T)	90074	91074	92074	77074A	77074G		10	80	21 lbs.
 5 Toggle Switches (5T)	90075	91075	92075	77075A	77075G		5	30	26 lbs.
 6 Toggle Switches (6T)	90076	91076	92076	77076A	77076G		5	20	30 lbs.
 1 Duplex Receptacle (10DR)	90101	91101	92101	77101A	77101G	77101R	25	250	5 lbs.
 2 Duplex Receptacles (20DR)	90102	91102	92102	77102A	77102G	77102R	10	100	9 lbs.
 3 Duplex Receptacles (30DR)	90103	91103	92103	77103A			10	80	11 lbs.
 1 Single Receptacle (1.405") (10R)	90091	91091	92091	77091A	77091G	77091R	25	250	5 lbs.
 2 Single Receptacles (1.405") (20R)	90092	91092	92092		77092G		10	100	11 lbs.
 1 Blank with Mounting Strap (Device Mounting 2.375") (1BDE)	90121	91121	92121	77121A	77121G		15	150	7 lbs.
 2 Blanks with Mounting Straps (Device Mounting 2.375") (2BDE)	90122	91122	92122	77122A	77122G		10	100	13 lbs.