

HS-600C

HS-600BN



Slide Bar Shower System

Product Spec Sheet



FEATURES & BENEFITS

- 5 Setting WaterSense Handheld Shower With Non-Positive Shutoff
- 24" Metal Slide Bar
- 72" Flexible Stainless Steel Hose
- Wall-Mount Hose Connector With Check Valve
- Max Flow Rate 1.75 gpm (6.6 L/min) at 80 psi
- Min Flow Rate 1.3 gpm (4.92 L/min) at 45 psi (ASME A112.18.1M/A112.18.1)

HS-600C
Chrome Finish

HS-600BN
Brushed Nickel Finish

APPROVALS:

Meets or Exceeds The Following:

* ANSI/ASME A112.18.1M/A112.18.1

* IAPMO/cUPC



ADA



Note: This product complies with ADA requirement for lever handle. Slide bar is not designed to be used as a grab bar.

CALIFORNIA:
TEXAS:
NEW YORK:

TEL: 866-532-8306
TEL: 800-935-5456
TEL: 800-431-2082

FAX: 866-532-8307
FAX: 800-683-4247
FAX: 800-640-2252

Visit Our Web Site : www.matco-norca.com


□ **HS-600C**

□ **HS-600BN**

**MATCO
NORCA**

Slide Bar Shower System

No.	Name	Part No.
1	Bracket Assembly	A603982
2	Handle Cap	A663453
3	Screw (3/16" -24" * 7/16" L)	A008183
4	Brass Slide Bar Mount	A112046
5	Screw (M5 * 5mm L)	A008003
6	Holding Hardware	A603524
7	Slide Bar	A025016
8	Brass Slide Bar Mount	A112047
9	Hex Wrench (H 2.5 * 19 mm L * 53 mm L)	A031000NI
10	Hand Shower	S2253G04
11	Shower Hose (72" L)	A105016
12	Brass Drop Ell	A558988
13	Check Valve	A519000N

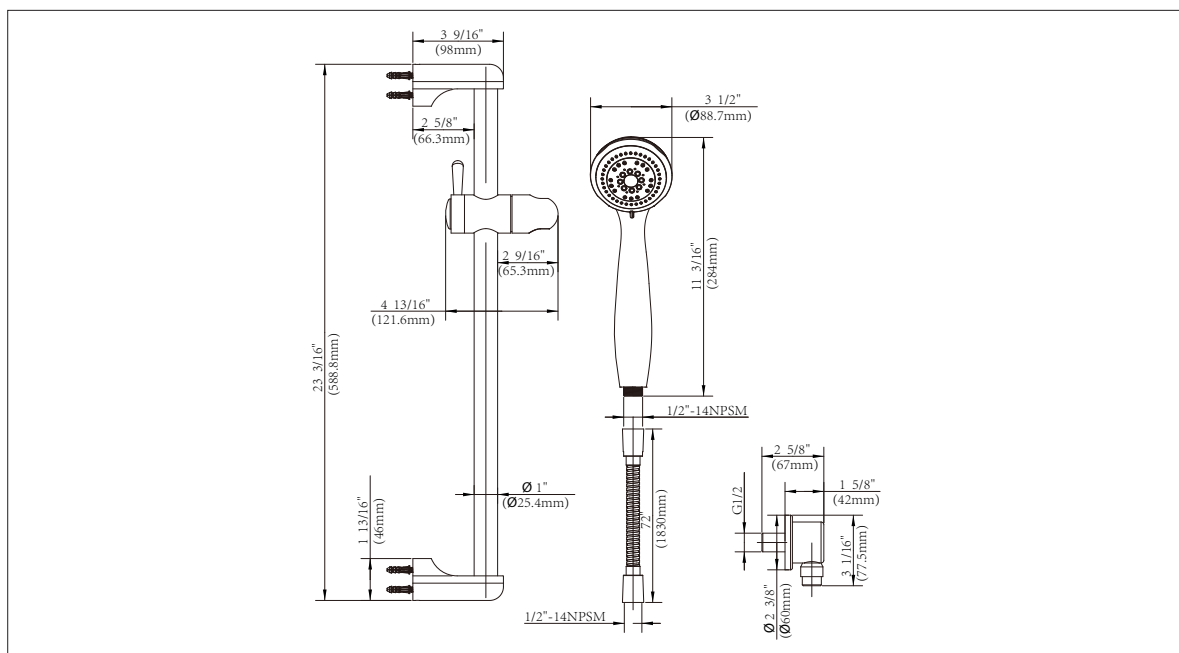

Product Spec Sheet

CALIFORNIA:
TEXAS:
NEW YORK:

TEL: 866-532-8306
TEL: 800-935-5456
TEL: 800-431-2082

FAX: 866-532-8307
FAX: 800-683-4247
FAX: 800-640-2252

Visit Our Web Site : www.matco-norca.com