

Type _____

Project _____

Catalog No. _____

Lamp/Wattage _____

NHIC-5LMRAT**5" IC Air-Tight LED Diamond/Onyx/Cobalt/Opal Series
Dedicated New Construction Housing**

Source: 11-16.6W LED

PRODUCT DESCRIPTION

Dedicated new construction housing for use in insulated ceilings can be in direct contact with thermal insulation. Air-tight construction provides energy savings by reducing the flow of air through the ceiling. The housing is dedicated and labeled for use with Nora Diamond, Cobalt, Onyx and Opal series LED fixtures

FEATURES

- IC rated for direct contact with insulation
- Quick connect provided for electrical connection to the LED Trim
- ASTM E283 for Air-Tight
- Energy Star Rated
- Exceeds California Title 24 high efficacy requirements
- cULus Listed for Damp Location and Feed Through
- cULus Listed for Wet Location and Feed Through (with NLEDC-571 or NLEDC-572)
- Available with 277V Step-down transformer
- Can be prewired for 0-10V dimming

CONSTRUCTION**Plaster Frame**

High quality 0.032 steel die cut one piece frame

Housing

0.040 steel housing adjusts to maximum ceiling thickness of 1-3/4" (45mm). Spring brackets accept torsion wing trim springs.

Clearance

"IC" Insulated Ceiling housings are direct contact rated; no minimum clearance is required.

Mounting

Two bar hangers are included adjustable to 24-1/2". Hanger bars have T-Bar slot and alignment feet. Bar hangers are parallel to junction box, but can be repositioned 90° perpendicular to junction box if desired. Insulation may be blown directly onto the surface of the fixture.

Air Flow Restriction

Meets ASTM E283 Air-Tight Requirements.

ELECTRICAL**Junction Box**

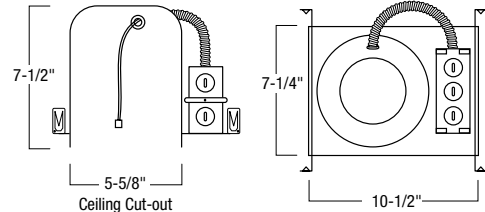
Plaster frame integrated 25 cubic inch 0.060" thick galvanized steel, with seven 1/2" NPT knockouts, four Romex® pryouts, and snap on covers. All leads are #18AWG wire, the ground wire is connected to the bottom, and quick connectors are supplied on all leads. Through branch circuit wiring (4-in, 4-out).

Compatible with:

- NLEDC - Diamond Series
- NLCBC - Cobalt Series
- NLOP - Opal Series
- NOX - Onyx Series

Dimming:

See compatible Diamond/Onyx/Cobalt/Opal for compatible dimmers

DIMENSIONS

Cut-out: 5-5/8"
ID: 5"
OD: 5-1/2"

Housing Length: 10-1/2"
Housing Width: 7-1/4"
Housing Height: 7-1/2"

Step Down Transformer (Converts 277V input to 120V)

Optional 50W step down transformer installed into Air Tight New Construction housing (NHIC-5LMRAT/277) (For use with Nora Diamond, Cobalt, Onyx and Opal Series LED Products)

EMERGENCY

90-minute battery is installed on frame and includes remote mounted test switch. For use only with Cobalt EM Series LED Down Lights specified specifically

Labels and Listings

Title 24 Compliant
cULus Listed for Damp Location & Feed Through
cULus Listed for Wet Location & Feed Through (w/ NLEDC-571 or NLEDC-572)
WSEC ASTM E283 for Air-Tight
Energy Star Rated
RoHS Compliant

**Housing**

NHIC-5LMRAT: 5" IC Air Tight Dedicated New Construction Housing

NHIC-5LMRAT/277: 5" IC Air Tight Dedicated New Construction Housing includes installed 50W step down transformer

NHIC-5LMRAT/4W: 5" IC Air Tight Dedicated Housing Pre-wired for 0-10V dimming Cobalt Series

NHIC-5LMRAT/4WEM: 5" IC Air Tight Dedicated Housing Pre-wired for Emergency Cobalt Series - Includes EM battery and remote test switch

NHIC-5LMRAT/6WEM: 5" IC Air Tight Dedicated Housing Pre-wired for Emergency and 0-10V dimming Cobalt Series - Includes EM battery and remote test switch