

# NMPK1-3LED 12V LED Puck Light

Source: 4.2W LEDs

## PRODUCT DESCRIPTION

Nora Lighting introduces a new slim light disk LED system for accent, under cabinet, cove lighting and jewelry cases, and other applications with limited space. These low-profile fixtures can be chained together to provide excellent and even illumination on all surfaces. Light disk is one of the most energy efficient products in the market. Combined with ultra low-profile housing, Nora's light disk offers unique features and a great ease of installation. LED technology eliminates forward heat from the fixture, also no UV or infrared rays to harm artwork, retail displays or heat sensitive foods.

## FEATURES

- Available in single units or a kit, which includes 3 puck lights
- Ten lights can be daisy-chained up to 90' away from driver
- Well suited for very small spaces: 1/2" deep with 2-3/4" diameter
- Easy installation using one screw
- Dimmable with Magnetic Power Supply
- 3", 6", 12" and 24" interconnection cables included with each puck
- Exceeds Title 24 high efficacy requirements
- No flicker delay or warm up like compact fluorescent products
- No UV light or infrared wavelengths
- Three Year Limited Warranty

## Included with every puck light:

- (1) 12V LED Puck Light,
- (1) 3" Interconnection Cable [NAPK-703],
- (1) 6" Interconnection Cable [NAPK-706],
- (1) 12" Interconnection Cable [NAPK-712],
- (1) 24" Interconnection Cable [NAPK-724],
- (1) Mini Coupler [NAPK-713],
- (1) Mounting Clip,
- (1) Screw.

## CONSTRUCTION

Die-cast aluminum, round, available in 3 different colors with matching cord colors: white and brushed nickel (both with white cord), and bronze (with black cord).

## ELECTRICAL

**Voltage:** 12V DC

**Power Consumption:** 4.2 Watts

**Lumens:** 200 Lumens @ 3000K / 180 Lumens @ 4200K

**Light Source:** 3 LEDs

**Efficacy:** 50 LPW @ 3000K

**Life Expectancy:** 30,000 Hours

**Maximum Length:** Ten daisy-chained per run.

## Labels and Warranty


- cULus Listed for Damp Location
- RoHS Compliant
- Title 24 Compliant
- California Energy Commission
- Three Year Warranty



## 12V LED Puck Light

- NMPK1-3LED30BZ:** 12V LED Puck Light, 3000K, Bronze
- NMPK1-3LED30C:** 12V LED Puck Light, 3000K, Chrome
- NMPK1-3LED30W:** 12V LED Puck Light, 3000K, White
- NMPK1-3LED42BZ:** 12V LED Puck Light, 4200K, Bronze
- NMPK1-3LED42C:** 12V LED Puck Light, 4200K, Chrome
- NMPK1-3LED42W:** 12V LED Puck Light, 4200K, White

## DIMENSIONS

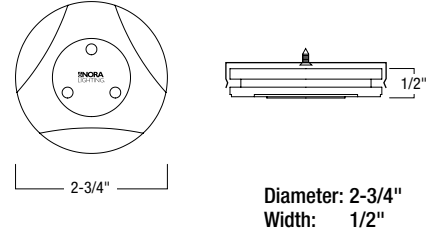

## ACCESSORIES

Item Number	Description
<b>NMPKA-RECBZ</b>	Recess Mount for LED Puck, Bronze
<b>NMPKA-RECC</b>	Recess Mount for LED Puck, Bronze
<b>NMPKA-RECW</b>	Recess Mount for LED Puck, Bronze
<b>NAPK-701B</b>	Splitter, Black
<b>NAPK-701W</b>	Splitter, White
<b>NAPK-702</b>	2" Interconnection Cable
<b>NAPK-703</b>	3" Interconnection Cable
<b>NAPK-706</b>	6" Interconnection Cable
<b>NAPK-712</b>	12" Interconnection Cable
<b>NAPK-724</b>	24" Interconnection Cable
<b>NAPK-736</b>	36" Interconnection Cable
<b>NAPK-748</b>	48" Interconnection Cable
<b>NAPK-709B</b>	18" Power Line Interconnector, Black
<b>NAPK-709W</b>	18" Power Line Interconnector, White
<b>NAPK-711B</b>	12" Power Line Interconnector with Switch, Black
<b>NAPK-711W</b>	12" Power Line Interconnector with Switch, White
<b>NAPK-713B</b>	Mini Coupler, Black
<b>NAPL-713W</b>	Mini Coupler, White

## LED DRIVERS

HARDWIRE DRIVERS	
Item Number	Description
<b>NAPK-530HW/12</b>	12V 30W Class II Hardwired Electronic LED Driver
<b>NAPK-560HW/12</b>	12V 60W Class II Hardwired Electronic LED Driver
<b>NMTD-40/12D</b>	12V 40W Dimmable Class II Hardwire Magnetic Driver 120/227V Input (Includes NAPK-10)
<b>NMTD-60/12D</b>	12V 60W Dimmable Class II Hardwire Magnetic Driver 120/227V Input (Includes NAPK-10)
<b>NMT-244/12C2D1</b>	12V Dimmable Class II Hardwire Magnetic Driver (Includes 4 NAPK-10 Connectors)

PLUG-IN DRIVERS	
Item Number	Description
<b>NAPK-524/12</b>	12V 24W Direct Plug-In LED Driver

DRIVER ACCESSORIES	
Item Number	Description
<b>NAPK-10</b>	Replacement 10' Power Line Connector for NMT Series
<b>NAPK-30</b>	Replacement 30' Power Line Connector for NMT Series
<b>NATL-415</b>	Low Voltage Splice Box
<b>NRA-125/6</b>	6" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
<b>NRA-125/12</b>	12" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
<b>NRA-125/18</b>	18" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
<b>NRA-125/72</b>	72" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
<b>NRA-6035W/6</b>	6' Cord and Plug for NAPK-530HW/12 & NAPK-560HW/12
<b>NRA-6035W/10</b>	10' Cord and Plug for NAPK-530HW/12 & NAPK-560HW/12
<b>NUSP-JBox</b>	Junction Box required for hardwiring NAPK-530HW/12 & NAPK-560HW/12